



FMC Technologies

Flowline Products and Services
World Proven Chiksan® and Weco® Equipment

Contents

Introduction	I1
Weco® Plug Valves	PV1
Weco® Check Valves	CV1
Weco® Butterfly Valves and Actuators	BV1
Original Chiksan® Swivel Joints	SJ1
Original Weco® Wing Unions	WU1
Weco® Fittings and Pup Joints	FP1
Integrated Services	IS1
Chiksan® and Weco® Specifications	S1

Flowline Products and Services

FMC Technologies is the world's leading supplier of flowline products and services to the oilfield industry and is the standard against which all others are measured. From the original Chiksan[®] and Weco[®] products to the revolutionary equipment designs and integrated services of today, FMC's fluid control family of products and services enables customers to achieve maximum life and value from their flowline systems throughout a complete range of applications.

The success of FMC's fluid control technology stems from a strong tradition of anticipating and responding to customer needs in every way possible. By focusing on the delivery of top products and services, FMC Technologies is helping its customers face tomorrow's technical and economic challenges today.

Flowline Products and Services



Experienced, Knowledgeable, Productive People

FMC's global fluid control team is structured around top flowline professionals – individuals who understand your business and are dedicated to meeting your needs. The management, engineering, and sales support staff are among the most experienced in the oil and gas industry. Their knowledge and industry expertise show up in the quality of products and services delivered to you.



Health, Safety & Environment

As a leading oilfield equipment and services provider, FMC Technologies stresses overall health, safety, and environment (HSE) in all of its operations and processes. With a proven record of outstanding HSE performance, FMC is a strong advocate of HSE training that goes beyond the basic legal requirements. The goal is to ensure that all field and office personnel are competent to carry out HSE critical duties, having received the appropriate training required by law, company policy, and clients. HSE policy covers all key elements of the business, including company safety policy statements, product safety, risk assessment, monitoring, auditing, and review.

Manufacturing Leader

FMC's fluid control manufacturing facility is located in Stephenville, Texas. The plant was constructed in 1980 and expanded in 1984, 1987, and 1996. The facility



occupies a 44-acre site and comprises 220,000 square feet of manufacturing capacity and 48,000 square feet of customer service, production support, and engineering offices. It utilizes the latest in computer numerical controlled (CNC) machining centers, production planning systems, computer aided design/computer aided manufacturing (CAD/CAM) systems, and the latest technology in order and distribution operating systems. The Stephenville facility produces a wide range of flowline equipment for distribution worldwide.

Flowline Products and Services

Unsurpassed Quality

FMC's fluid control quality system has been surveyed and approved by DNV and meets ISO 9001 and European Pressure Equipment Directive 97/23/CE. Most products are supplied with the CE marking. Chiksan and Weco products also can be supplied with both type and case approval from DNV, Lloyds, ABS, GGTN, and others. Products for sour gas service meet NACE MR-01-75 and API RP-14-E. Complete material certification and traceability are also available.

Research and Development

To meet the evolving needs of its customers, FMC continually invests in flowline research and development. This industry-leading effort has resulted in a host of new products and refinements to existing products. All new products are subjected to exhaustive laboratory and field tests to ensure their reliability and integrity before they are released to the marketplace. Research and development capabilities include exhaustive laboratory and field testing, destructive and nondestructive testing, three-dimensional finite element analysis, computational fluid dynamics, and the flowline industry's only high-velocity flow loop.

Worldwide Distribution

Chiksan and Weco products are distributed from more than 60 locations worldwide. FMC fluid control facilities stock many flowline products in the specific sizes, pressures, and materials common in the various regions. From a replacement seal for a Chiksan swivel joint to a platform full of well servicing equipment, FMC Technologies delivers.

Integrated Services

To satisfy the total flowline requirements of its customers, FMC Technologies has consolidated its industry-leading after-sales capabilities into a comprehensive Integrated Services program. Integrated Services is helping customers worldwide realize the maximum value from their flowline assets to guarantee that the right products are shipped to the job site in top working condition. This total solutions approach includes the InteServ tracking and management system, mobile inspection and repair, strategically located service centers, and genuine Chiksan and Weco spare parts.




Weco® Plug Valves

Choice of operators, actuators

Gear operators, pneumatic actuators, and hydraulic actuators are available.

Body erosion virtually eliminated

Fluid is forced between the plug/seal interface, limiting wear to replaceable parts.

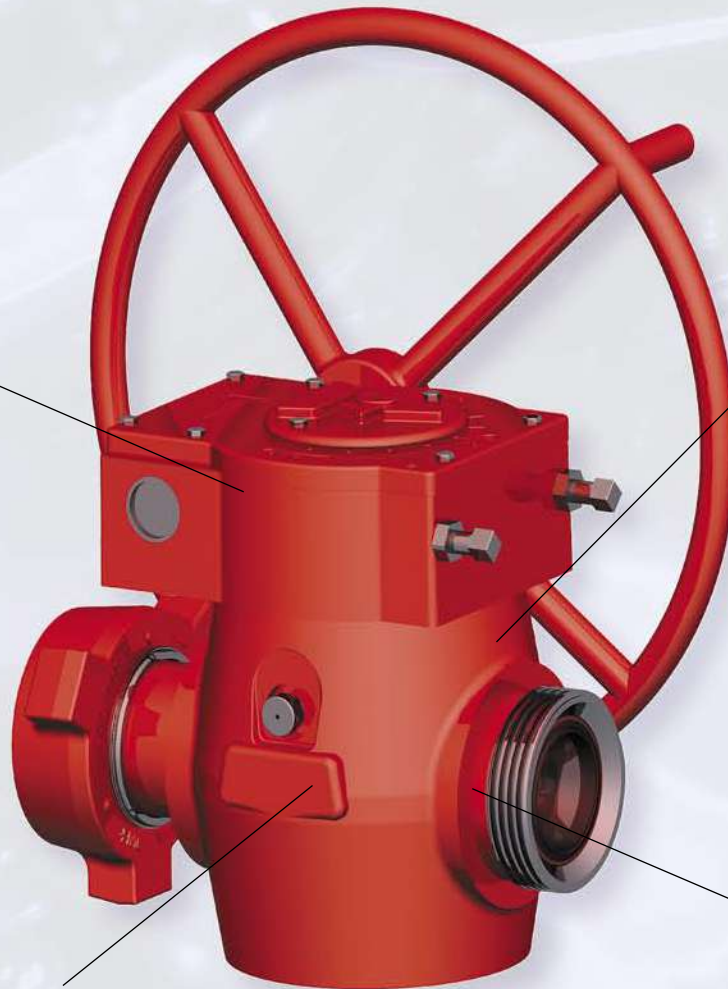

Ultimate sealability, no adjustments required

Floating plug improves sealability and reduces plug wear.

Low torque operation at all pressures

Cylindrical plug fits between seal and side segments, reducing plug drag on the valve body.

Weco ULT and DR plug valves are premium, quarter-turn valves designed for a wide range of standard and sour gas drilling, production, and well-servicing applications. These rugged valves are offered in single and dual-body designs in pressures to 20,000 psi. They range in size from 1 to 4-inches and come with threaded, Weco wing union, flanged, and clamp hub ends. Consult factory for configurations. Like all pressure containing products, Weco plug valves require special handling (see inside back cover for Warnings and Cautions).

Weco® Plug Valves

ULT Plug Valves

The benefits of FMC's ULT plug valves are a direct result of its unique design features. Combined, these features have redefined the standards for plug valve operating principles and performance.

Ultimate Sealability

The key to the ULT plug valve's unprecedented seal integrity is its proprietary floating plug and dual-seal design. When the valve is closed, the dual segment seal provides a redundant seal on the downstream side of the valve. In 3-inch and larger sizes, the ULT plug valve also employs a two-piece plug and stem design. When these valves are closed, line fluid pressure in the body is equalized around the plug resulting in ultimate sealing and low operating torque.

Ultimate Valve Body Life

In addition to improved bi-directional seal performance, the ULT plug valve dramatically extends service life. When a traditional plug valve is closed, high-pressure fluids are forced between the upstream body and seal segment interface. This flow path can erode the valve body, potentially ruining the valve. When a ULT plug valve is closed, the only available flow path is between the seal segment and plug interface. This flow path eliminates body erosion and limits any potential wear to replaceable components.


Ultimate Seal Life

In addition to improved valve body life, two other frequent operating problems associated with high-pressure plug valves – both of which cause premature damage to seals and increased valve operating torque – are solved by the ULT plug valve. Traditional plug valve designs can sometimes seal on the upstream side of the valve, resulting in extrusion damage to the upstream segment seal. Traditional plug valves can also trap body pressure after line pressure is removed from the valve, resulting in extrusion damage to both upstream and downstream segment seals. The dual-seal design of the ULT plug valve, by forcing flow between the plug and segment interface, eliminates both of these problems.

Ultimate Life Cycle Cost Savings

Superior sealability, increased life of valve body, and elimination of premature seal damage result in significant savings in life cycle costs of the ULT plug valve over traditional plug valves. Qualification tests have proven that the ULT plug valve extends service life 3 to 5 times over other plug valves while reducing maintenance costs. In smaller sizes, ULT parts kits may be used in existing DR plug valve bodies to extend the life of these valves.

OPERATING PRINCIPAL

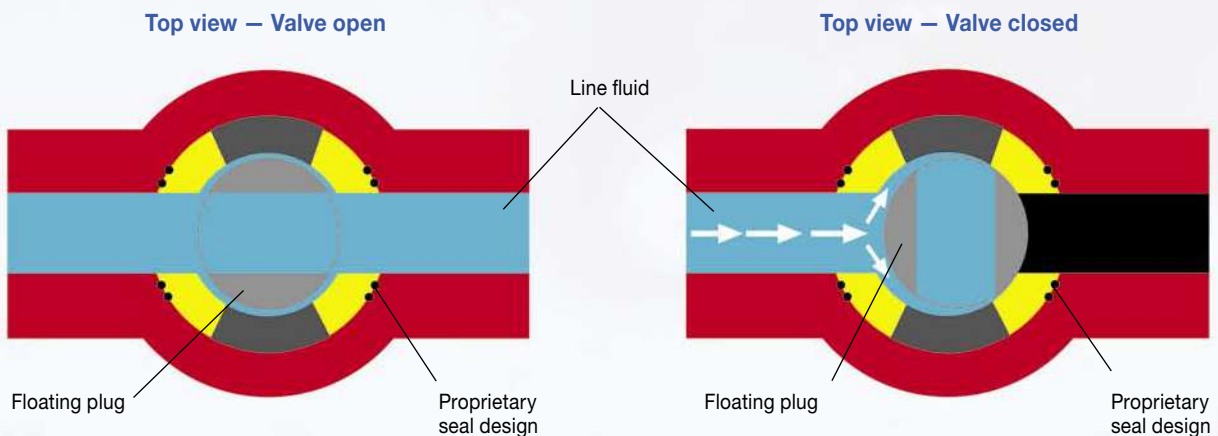

Weco® Plug Valves

ULT Plug Valves (3-inch and larger)

Up to 20,000 psi cold working pressure

Recommended service

Slick water, sand, proppant/gel, and cement

Two-piece floating plug/stem


Proprietary floating plug and stem uniformly distribute load against the downstream seat to improve sealability and reduce plug wear.

Fast, simple field repair

Bottom entry design provides access to all valve internals without having to remove the operator or actuator.

Handles sand, proppant, and cement

Linear wave springs prevent small particles from entering metal-to-metal seal area, enabling use in a broad range of applications.

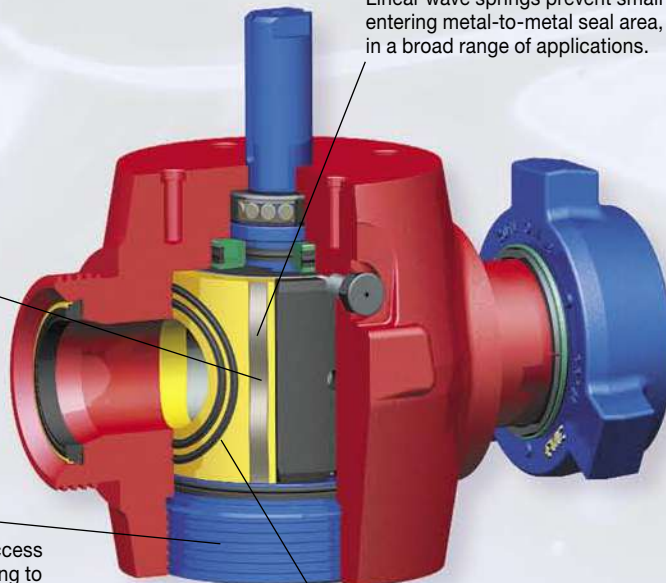

Eliminates body washout, extends body life

Dual seals direct flow between the seal segment and plug to provide long, trouble-free service life.

ULT Plug Valves (below 3-inch)

Up to 20,000 psi cold working pressure

Recommended service

Slick water, sand, proppant/gel, and cement

Eliminates body washout, extends body life

Dual seals direct flow between the seal segment and plug to provide long, trouble-free service life.

Fast assembly


Integral stem and plug provide fast, sure assembly without adjustments.

Interchangeable design

Internal components interchange with Weco DR valve components, potentially extending the life of those valve bodies.

Eliminates corrosion in segment sealing area

Dual segment seals greatly reduce erosive fluid flow between the seal segments and the plug valve body to improve sealing capabilities and extend service life.

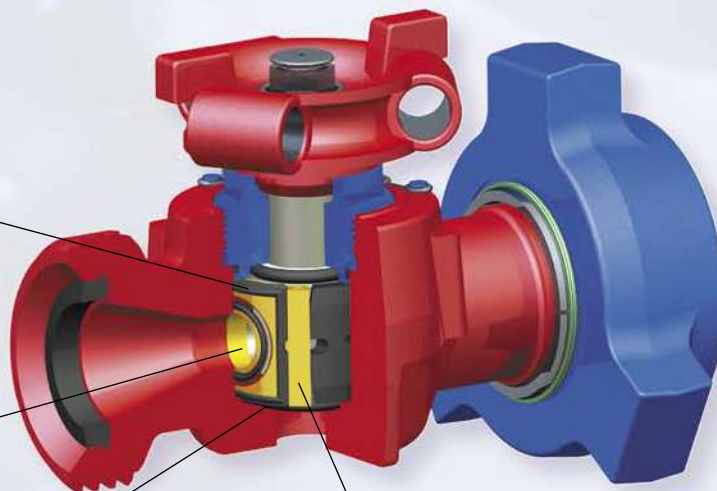

See specifications tables (pages PV1A and PV2A) for sizes, dimensions, weights, materials, and part numbers.

Weco® Plug Valves

Specialty ULT Plug Valves

The ULT plug valve's proven, proprietary design technology enables customers to take advantage of a wide range of configurations for a host of specialty applications. Options include single and dual body designs; drill pipe, Weco union, or flanged end connections; and side outlets. Consult factory for specific applications.



ULT Dual Body Plug Valves
(Drill Pipe Connections)

ULT Dual Body Plug Valves

(Weco Union x Flanged End Connections)



ULT Flanged Plug Valves

(Flanged End Connections)



See Specifications Tables (page PV1A) for sizes, dimensions, weights, materials, and part numbers.

Weco® Check Valves

Weco check valves are used to isolate well-servicing equipment from high-pressure treating fluids during fracturing applications. Offered in three primary models, these rugged valves seal against a complete range of well-servicing fluids at pressures to 20,000 psi. Valves are available in 1-1/2 to 4-inch bore sizes for standard and reverse flow. Sour gas models available. Consult factory for configurations. Like all pressure containing products, Weco check valves require special handling (see inside back cover for Warnings and Cautions).

Top-Entry Check Valves

Recommended service


High-pressure well-servicing lines, fracturing lines, testing lines, cementing and circulating lines, and other well service and stimulation applications

ACME thread cap

Coarse, ACME thread cap can be easily removed without having to remove the valve from the line.

Fast, easy service

Top-entry design and removable flapper assembly make repair fast and easy.

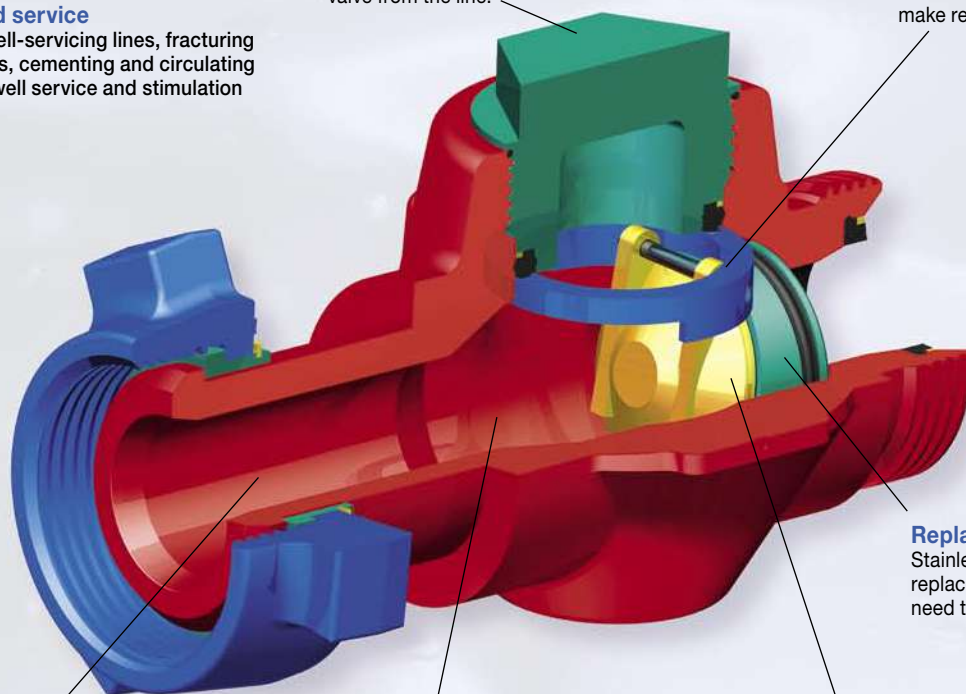

Replaceable seat

Stainless steel seat is replaceable, reducing the need to scrap body.

Abrasion resistant flapper

Carboxylated nitrile flapper face is abrasion resistant against a complete range of well fluids.

Forged design

Forged body, unique flow dynamics, advanced erosion characteristics, and abrasion-resistant components combine for long service life.

Open flow path

Flapper dynamics provide optimum flow through the valve and low flow differential.


See specifications tables (pages CV1A and CV2A) for sizes, dimensions, weights, materials, and part numbers.

Weco® Check Valves

Dart Check Valves

Recommended service
Extreme nitrogen and carbon dioxide services; wet or dry non-erosive flow

Minimizes explosive decomposition
Explosive decomposition resistant materials and design for long service life.

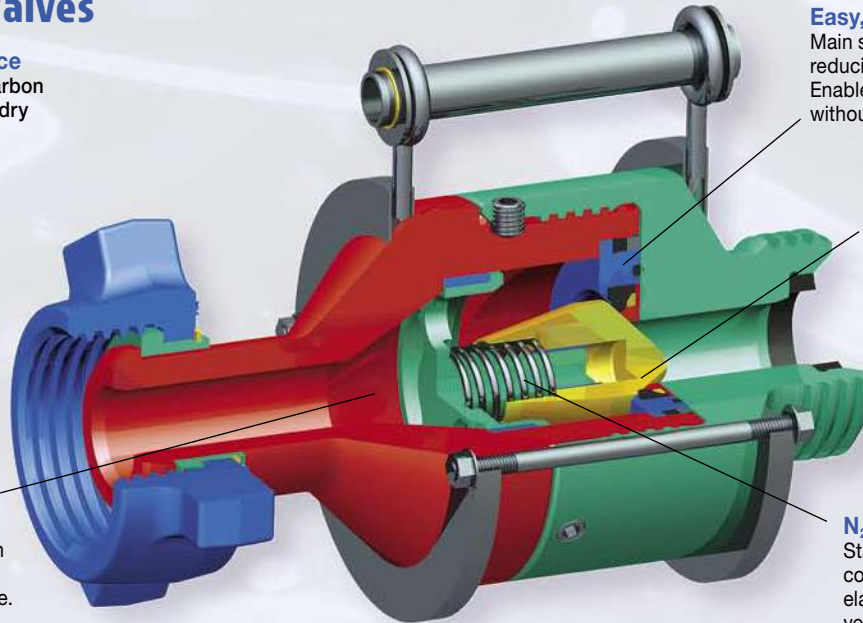

Easy, low-cost service
Main seal is located on seat, reducing exposure to flow. Enables seal to be replaced without replacing seat or dart.


Low-inertia dart design
Hollow dart and fixed stem minimize pressure required to start flow. Non-metallic bushing reduces friction, increasing dart and stem life.

N₂ and CO₂ capability
Stainless steel internal components and special elastomer seal handle gas velocities in excess of 250 feet/second.

Flapper Check Valves

Recommended service
Slick water, sand, proppant/gel, and cement services

Open flow path
Flapper dynamics provide optimum flow through the valve and low flow differential.

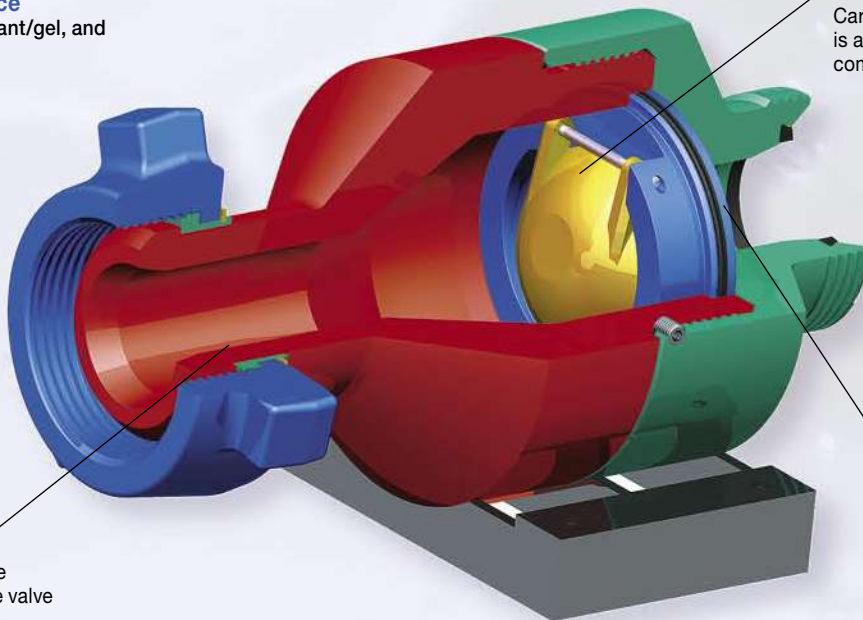


Abrasion resistant flapper
Carboxylated nitrile flapper face is abrasion resistant against a complete range of well fluids.

Replaceable seat
Separate seat/body design ensures the seat can be replaced as needed.

See specifications tables (pages CV1A and CV2A) for sizes, dimensions, weights, materials, and part numbers.

Weco® Butterfly Valves and Actuators

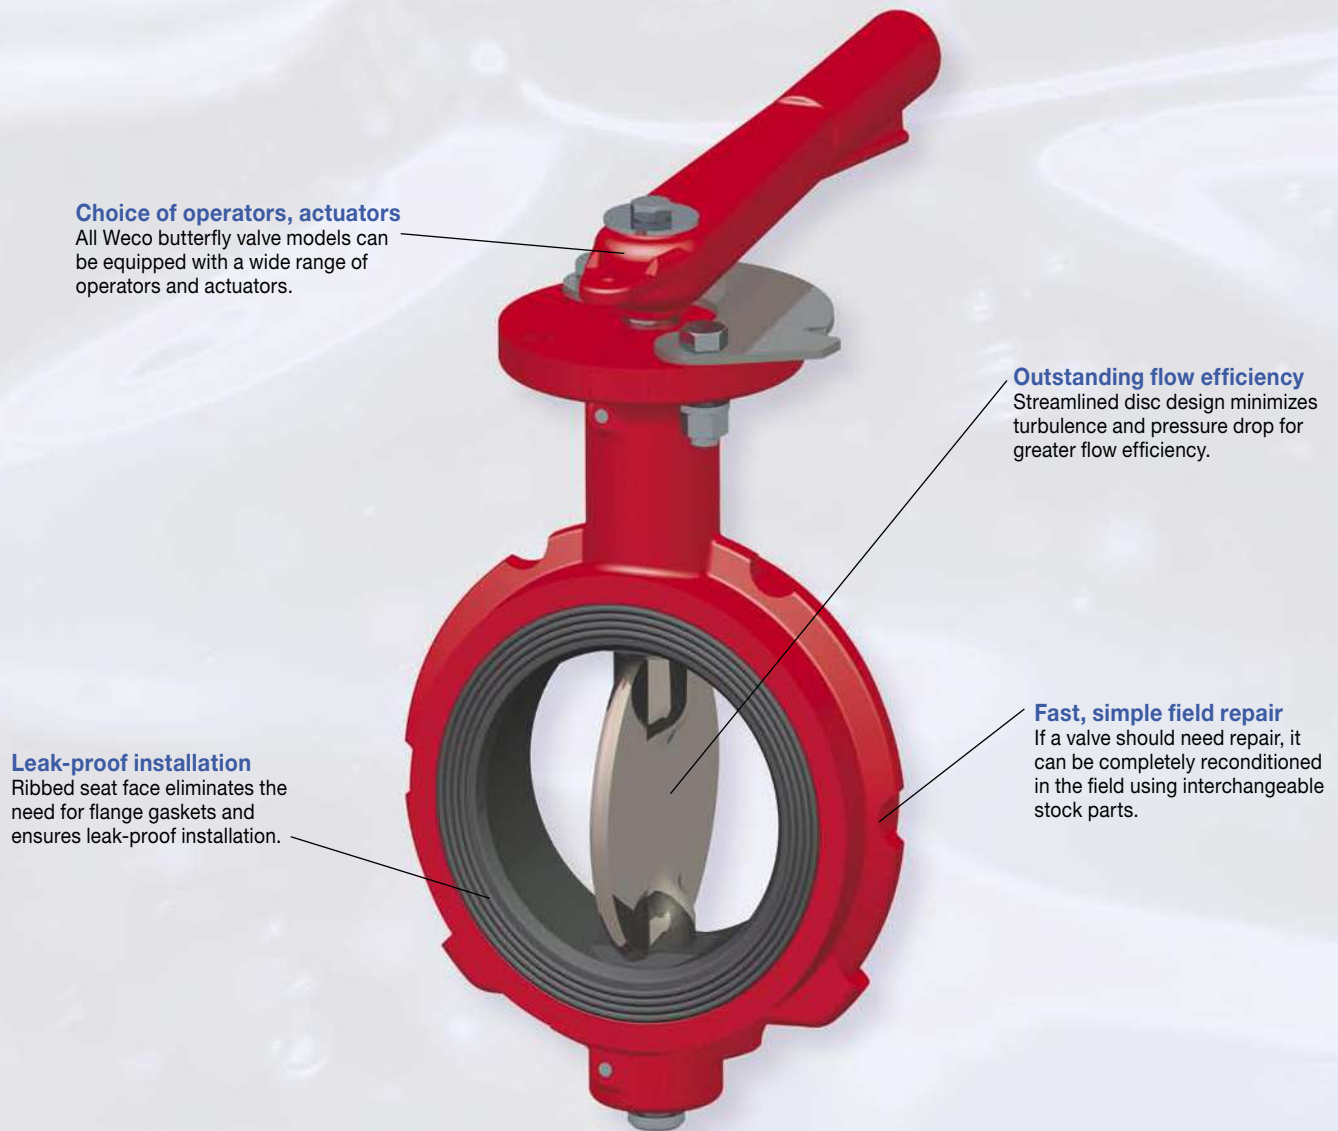

Choice of operators, actuators

All Weco butterfly valve models can be equipped with a wide range of operators and actuators.

Outstanding flow efficiency

Streamlined disc design minimizes turbulence and pressure drop for greater flow efficiency.

Fast, simple field repair


If a valve should need repair, it can be completely reconditioned in the field using interchangeable stock parts.

Leak-proof installation

Ribbed seat face eliminates the need for flange gaskets and ensures leak-proof installation.

Weco butterfly valves offer the ultimate in dependable, economical flow control. These field-proven valves are available from stock in 2 through 24-inch sizes and can handle working pressures up to 175 psi. For pressure ratings from 176 psi up to 285 psi, consult factory. Wafer, notched, and lug-type body styles meet requirements for new or existing flowline systems. Using a variety of materials, valve bodies, discs, stems, and seats can be individually matched to specific operating conditions, including temperature range, type and concentration of fluid, and various flow conditions. All materials meet ASTM and AISI standards.

Weco® Butterfly Valves and Actuators

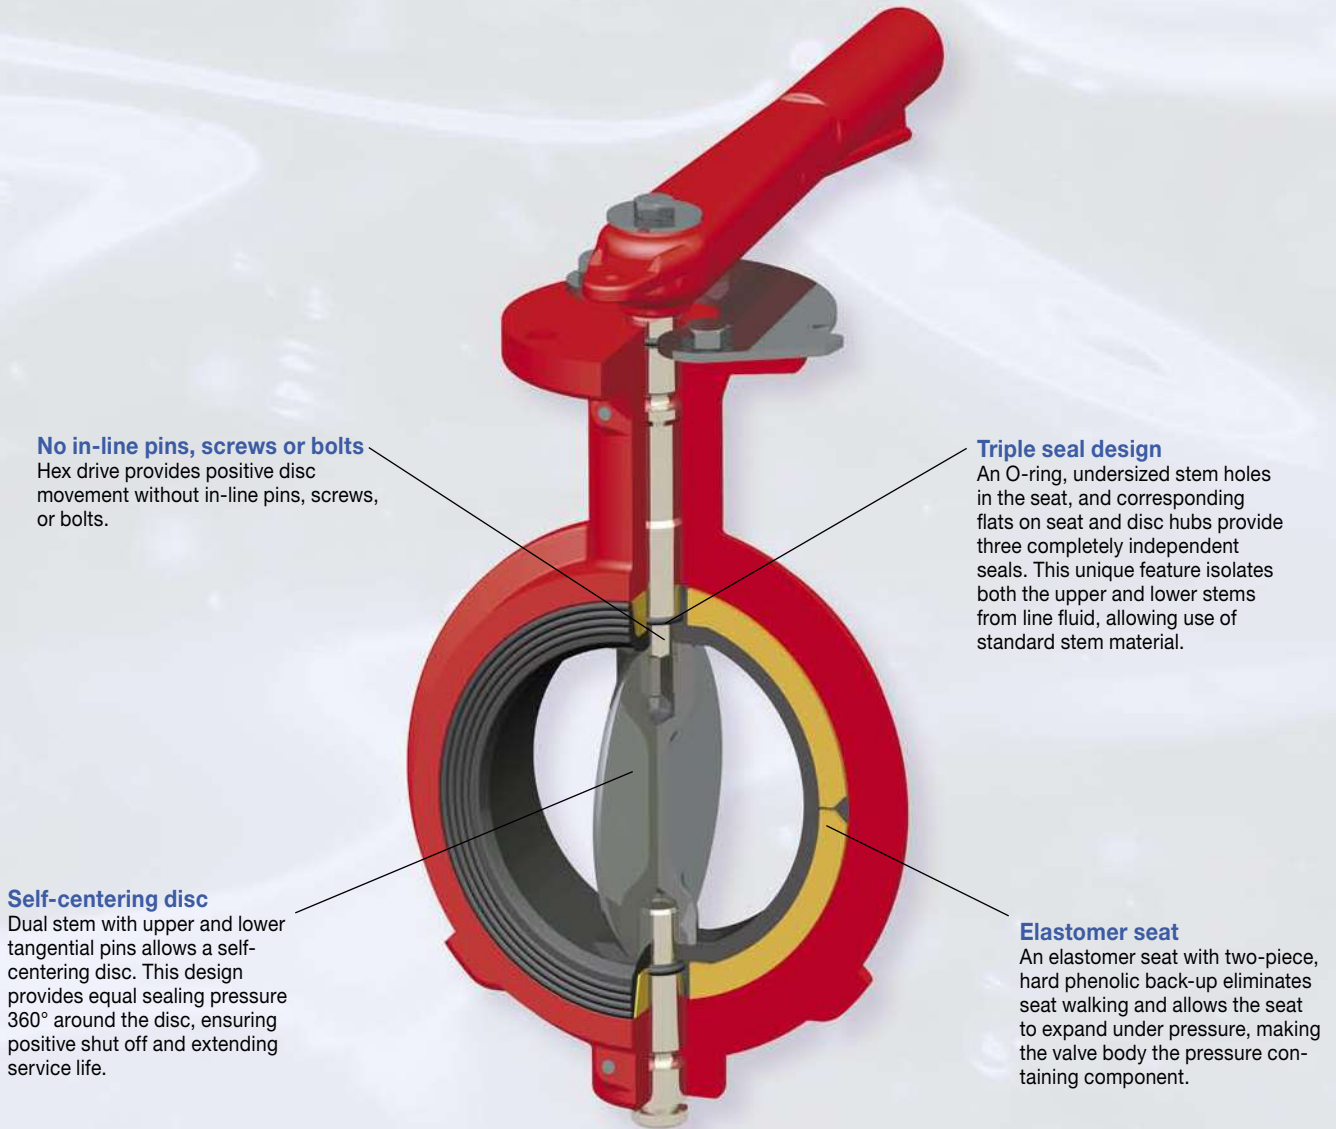

No in-line pins, screws or bolts

Hex drive provides positive disc movement without in-line pins, screws, or bolts.

Triple seal design

An O-ring, undersized stem holes in the seat, and corresponding flats on seat and disc hubs provide three completely independent seals. This unique feature isolates both the upper and lower stems from line fluid, allowing use of standard stem material.

Self-centering disc

Dual stem with upper and lower tangential pins allows a self-centering disc. This design provides equal sealing pressure 360° around the disc, ensuring positive shut off and extending service life.

Elastomer seat

An elastomer seat with two-piece, hard phenolic back-up eliminates seat walking and allows the seat to expand under pressure, making the valve body the pressure containing component.

Standard Materials of Construction

Valve Part	Standard Material	Optional Materials
Seat & O-ring	Nitrile (Buna N) (-20°F to 200°F)	Hypalon®, Teflon®, Viton®, EPDM, Red Natural Rubber
Body	Ductile Iron	Aluminum, Steel, Stainless Steel
Stem (upper & lower)	410 Stainless Steel	316 Stainless Steel
Disc	Ductile Iron	Aluminum Bronze, 316 Stainless Steel, Ryton®, Kynar®, Halar, Teflon® Coated, Nickel Plated, Hastelloy®
Spirol/Retainer Pins	302 Stainless Steel	

Other materials of construction available. Consult factory.

Weco® Butterfly Valves and Actuators

Model 12

Short neck, wafer body; 175 psi cold working pressure, 2 to 12-inch sizes; 150 psi cold working pressure, 14 and 16-inch sizes

Recommended service

General on/off and throttling services from 1mm Hg absolute vacuum to full working pressure

Features

- Valves are self-centering and mount between 125 or 150 lb ANSI flanges



Model 12N

Short neck, notched body; 175 psi cold working pressure, 2 to 6-inch sizes

Recommended service

General on/off and throttling services from 1mm Hg absolute vacuum to full working pressure

Features

- Valves are notched to fit between lightweight flanges



Model 22

Long neck, wafer body; 175 psi cold working pressure, 2 to 12-inch sizes

Recommended service

General on/off and throttling services from 1mm Hg absolute vacuum to full working pressure

Features

- Valves are self-centering and mount between 125 or 150 lb ANSI flanges
- Long neck allows for pipe insulation



Model 22L


Long neck, lug body, 175 psi cold working pressure, 2 to 24-inch sizes

Recommended service

General on/off and throttling services from 1mm Hg absolute vacuum to full working pressure

Features

- Tapped lugs allow independent upstream or downstream bolting to 125 or 150 lb ANSI flanges
- Long neck allows for pipe insulation

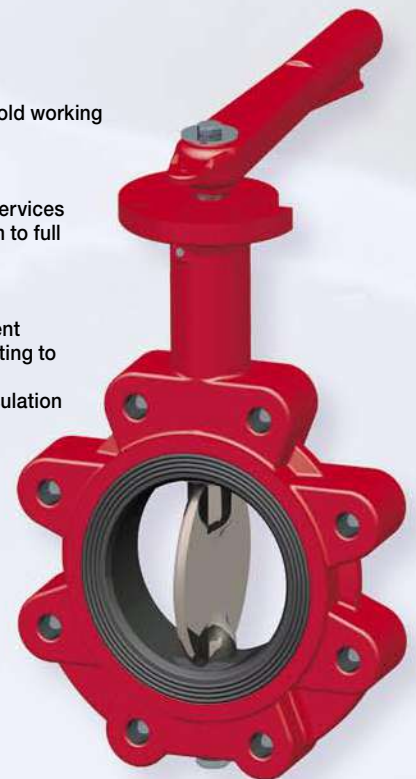

See specifications tables (pages BV1A to BV3A) for sizes, dimensions, weights, materials, and part numbers.

Weco® Butterfly Valves and Actuators

Operators & Actuators

All models and sizes of Weco butterfly valves can be equipped with Weco operators or actuators as well as other brands of actuators. Typical options include standard and throttling handles, gear operators, chain-wheel operators, vane actuators, pneumatic actuators, special controllers, and positioners.

Pneumatic Actuators

Double-acting or fail-safe spring return; 2 through 12-inch valve sizes

Recommended service

Pneumatic actuator for on/off valve operation

Features

- Mounts directly to Weco butterfly valves without special adapters or mounting hardware
- Full 90° operation with a minimum of 30 psi air, no adjustments required



Standard Handle

2 through 12-inch valve sizes

Recommended service

Recommended for 8-inch valves and larger

Features

- Positive-stop gripper with integral locking lug ensures full open/full closed operation
- Model 12 and 12N valves have a detent plate which bolts on the valve body in each of four quadrants; Model 22 and 22L valve have a pre-notched top flange with on/off detent positions



Vane Actuator

Quarter-turn, double acting actuator; 2 through 6-inch valve sizes

Recommended service

Compact, pneumatic actuator for on/off valve operation

Features

- The only moving part, the vane, is cast integral to the shaft for sturdiness; does not require field lubrication
- Fully repairable in-line
- Mounts directly to valve in any quadrant

Gear Operators

Weatherproof, worm gear operator; 2 through 24-inch valve sizes

Recommended service

Manual on/off or throttling services

Features

- Operator has 90° travel arc with internal travel stop screws for a plus or minus 20° adjustment at either end of the travel
- Mounts on the valve in any quadrant
- Chain wheel attachment available
- Hand-wheel shaft extensions available



Throttling Handle

2 through 12-inch valve sizes

Recommended service

Recommended for 8-inch valves and larger

Features

- Notched detent plate and positive-stop gripper with integral locking lug ensures positive locking in any of 10 positions from full open or full closed operation
- Detent plate bolts on the valve body in each of the four quadrants

See specifications tables (pages BV4A to BV10A) for sizes, dimensions, weights, materials, and part numbers.

Original Chiksan® Swivel Joints

Streamlined bore minimizes flow restrictions

Smooth, round bore design minimizes turbulence and pressure drop. Longsweep® and TripleStep swivel joints have extra-long radius elbows that optimize flow characteristics and extend life in the ball race areas when handling abrasives at extremely high pressures.

Bearings key to rotation, strength

To assure long, dependable service, Chiksan dual and tri-race ball bearing swivels are designed to meet or exceed load capacities and service conditions. All ball races are either flame hardened, carburized and hardened, or have "snap-in" stainless steel ball races.

Proven packing design

Industry leading packing design integrates an anti-extrusion ring that serves as a retainer and bearing to reduce friction between the resilient packing material and the packing chamber as the joint is rotated.

Field repairable

If packing, bearings, or ball plugs should need replacing, easy-to-use field repair kits are available.

Chiksan swivel joints deliver significantly longer life, superior performance, and reduced maintenance. Designed for standard and sour gas services, these world proven fittings come in 3/8 to 12-inch sizes and can handle pressures from vacuum to 20,000 psi. Many different Chiksan assembly configurations are available. These styles can be combined in an unlimited variety of ways to suit practically any installation. Available end connections are threaded, integral Weco® wing union, beveled for welding, or flanged. Like all pressure containing products, Chiksan swivels require special handling (see inside back cover for Warnings and Cautions).

Original Chiksan® Swivel Joints

Chiksan Models	Color Coding	Cold Working Pressure psi (bar)	Material	End Connections	Nominal Sizes, in.										Notes				
					3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4		6	8	10	12
Low-Pressure Swivel Joints	Dark Green	175 (12)	Ductile Iron	Flanged															1,2,3
	Blue	285 (20)	Carbon Steel	Flanged															1,3,4
	Dark Green	600 (41)	Ductile Iron	NPT															2,3
	Blue	1,000 (69)	Carbon Steel	NPT															3
High-Pressure Swivel Joints	Olive Green (Sour Gas)	6,000 (414)	Carbon Steel	Weco figure 602 union															5
	Silver	6,000 (414)	Carbon Steel	Female line pipe threads															3,6,8
Extra High-Pressure Swivel Joints	Black	10,000 (690)	Carbon Steel	Female line pipe threads															3,6
	Brown	7,500 (517)	Alloy Steel	Female line pipe threads															3,6
	Olive Green (Sour Gas)	7,500 (517)	Alloy Steel	Weco figure 1002 union															5
	Olive Green (Sour Gas)	10,000 (690)	Alloy Steel	Weco figure 1502 union															5
	Black	10,000 (690)	Alloy Steel	Female line pipe threads															3,6,7
					Weco figure 1002 union														3
Longsweep® Swivel Joints	Olive Green (Sour Gas)	15,000 (1034)	Alloy Steel	Weco figure 2202 union															6
	Red	15,000 (1034)	Alloy Steel	Weco figure 1502 union															3
	Light Blue	20,000 (1379)	Alloy Steel	Weco figure 2002 union															3
	Black	10,000 (690)	Alloy Steel	Weco figure 1002 union															3
TripleStep Swivel Joints	Black	15,000 (1034)	Alloy Steel	Weco figure 1502 union															3
	Red	15,000 (1034)	Alloy Steel	Weco figure 1502 union															3

Sour Gas Service
 FMC Technologies manufactures Chiksan sour gas swivel joints in accordance with the National Association of Corrosion Engineers (NACE) Standard MR-01-75 and the American Petroleum Institute's (API) Standard RP-14-E. These swivel joints are specially heat-treated and inspected for controlled hardness. Because the specially heat treated steel required for sour gas service does not provide a strong enough bearing surface, Chiksan sour gas swivel joints use patented snap-in ball races to assure extra strength and high load-bearing capacity. Fluoroelastomer or HNBR packing is used to isolate the races from the line fluid.

- Notes**
 All body materials meet ASTM or AISI standards. Consult factory for special sizes, styles, end connections, or packing units.
1. Flanged ends faced and drilled to Class 150 flange specifications, unless otherwise specified.
 2. Not available in Styles 80, 10, or other styles requiring more than two swivel connections.
 3. 3/8- to 4-inch sizes furnished with nitrile packing and brass or stainless steel anti-extrusion ring.
 4. 6- to 12-inch sizes furnished with nitrile packing and stainless steel anti-extrusion ring.
 5. Furnished with Fluoroelastomer or HNBR packing and stainless steel anti-extrusion ring. FMC Technologies does not warrant the performance of any elastomer seal for sour gas service.
 6. Power make-up must be used for line pipe threaded connections to achieve rated cold working pressure.
 7. 3-inch size rated at 10,000 psi cold working pressure with integral Weco 1002 union ends only.
 8. 5-inch size available with threaded or beveled ends; limited to 3,000 psi cold working pressure.

Original Chiksan® Swivel Joints

TripleStep Swivel Joints

Advanced material selection

The TripleStep swivel joint is manufactured from forged alloy steel with a closely controlled, proprietary chemical composition and heat treatment to ensure superior toughness, ductility, case depth, case hardness, and core strength.

Exclusive design delivers longer life, lower cost

TripleStep swivel joints deliver the highest bending and axial load capacities in the industry. They also eliminate rejections from excessive wear in the ball race area as well as swivel seizures due to corrosion and brinelling of the ball races.

Unmatched erosion allowance

An exclusive three step design coupled with patented bearing race geometry adds significant wall thickness under the male races without increasing swivel joint size or weight.

Competitive Hype VS. Proof Positive

Designed especially for abrasive, high-pressure well servicing applications, TripleStep swivel joints have been proven against competitive swivels in customer-witnessed flow loop tests and field applications. The unique three step ball race design provides significantly greater erosion allowance without increasing swivel joint size or weight. The result: TripleStep swivel joints deliver increased life, superior performance, and reduced maintenance...lasting 2-1/2 to 5 times longer than competitive swivels.

Thicker Where it Counts


Competitive swivels wear out first in the ball races, meaning they must be disassembled for inspection. TripleStep swivels wear in the elbows, meaning they can be inspected and returned to service without disassembly. The TripleStep design places more material under the male ball race – a location that computational flow dynamics analysis and field testing shows to be a high erosion area.

Instream packing for long seal life


World proven instream packing technology provides unsurpassed sealability and reliability in the harshest oilfield conditions. An integral anti-extrusion ring serves as a retainer and bearing to reduce friction between the resilient packing material and the packing chamber as the joint is rotated.

Eliminates routine maintenance


An improved environmental seal reduces the potential for corrosion in the ball race area. The integrity of the seal and the use of a high-performance grease during initial assembly virtually eliminates the need for periodic greasing.

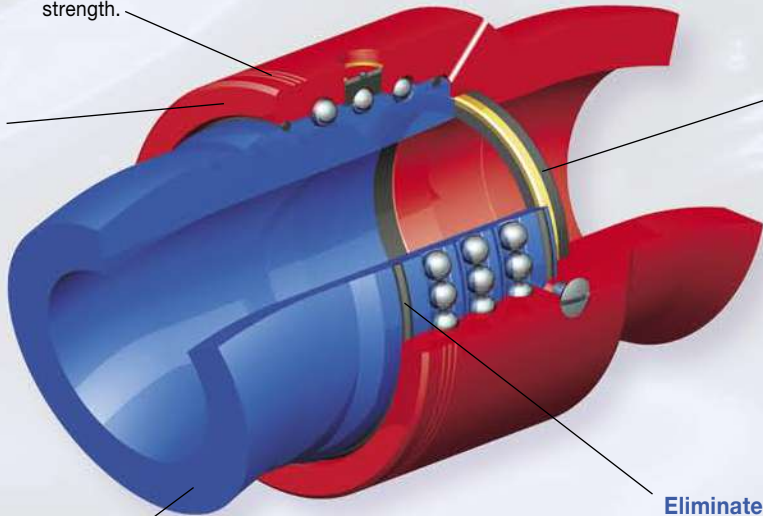

Accelerated Wear Test (40ft/sec. with 6 ppa 20/40 northern sand)

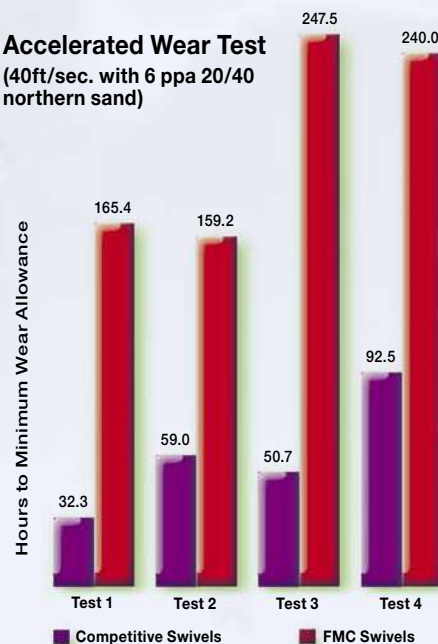

Original Chiksan® Swivel Joints

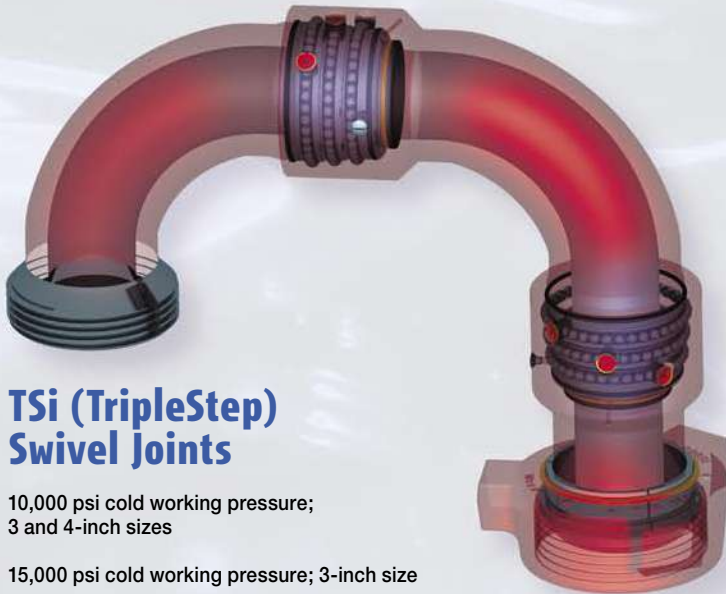

TSi (TripleStep) Swivel Joints

10,000 psi cold working pressure;
3 and 4-inch sizes

15,000 psi cold working pressure; 3-inch size

For Longsweep swivels and sizes or pressures not shown, consult factory.

Recommended service

Long-radius elbows designed especially for high-pressure abrasive applications such as fracturing, choke-and-kill lines, cementing and circulating hoses, acidizing, and test lines




XHP (Extra High-Pressure) Swivel Joints

10,000 psi cold working pressure; 2-inch size

Recommended service

Hydraulic control lines, mud lines, rotary line connections, BOP lines, test lines, water lines, offshore wellhead connections, cementing and circulating hoses, and choke-and-kill lines

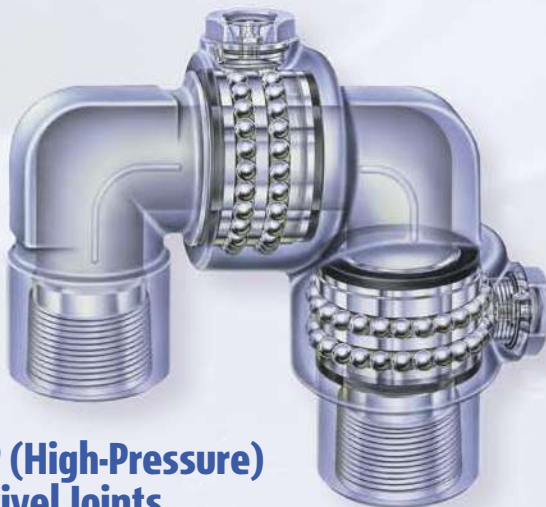


HP (High-Pressure) Swivel Joints

6,000 psi cold working pressure; 3/8 to 4-inch sizes

Recommended service

Hydraulic control lines, mud lines, rotary line connections, BOP lines, test lines, water lines, offshore wellhead connections, cementing and circulating hoses, and choke-and-kill lines

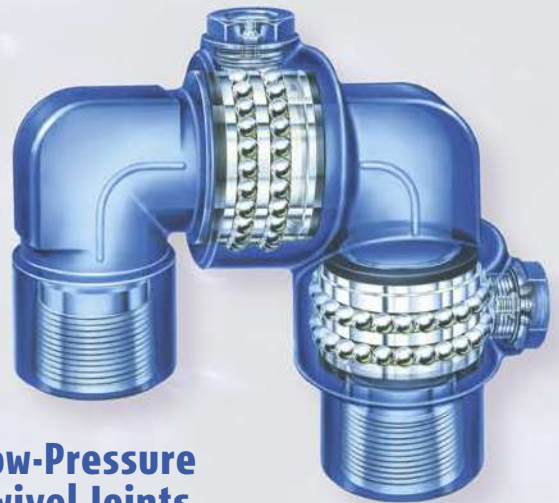

Low-Pressure Swivel Joints

175 psi to 1,000 psi cold working pressure;
3/4 to 12-inch sizes

Recommended service

Transfer lines, temporary flow lines, discharge lines, auxiliary flow lines, water lines, and other general-service oilfield applications

See specifications tables (pages SJ1A to SJ8A) for sizes, dimensions, weights, materials, and part numbers.


Original Chiksan® Swivel Joints

Controlled hardness

Swivel components are specially heat-treated and 100% tested for controlled hardness.

Positive identification

Chiksan swivels for sour gas service are stamped "Sour Gas" and painted with an olive green, zinc-chromate primer to ensure quick, positive identification.

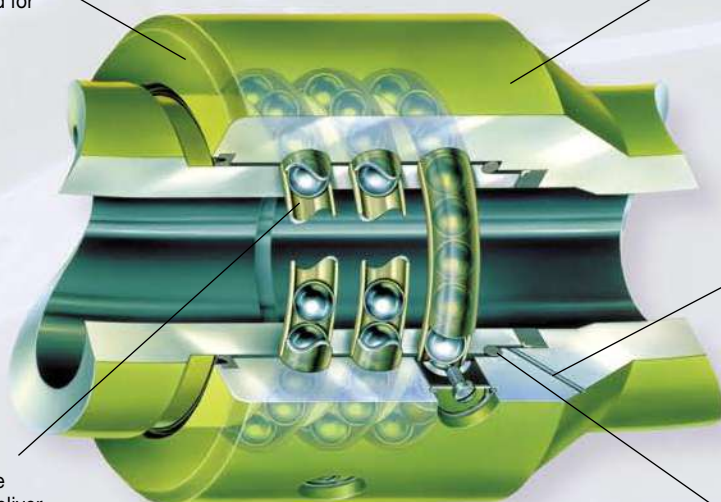

Snap-in ball races

Snap-in ball races provide hard bearing surface to deliver extra strength and high load-bearing capacity when handling sour gas.

Leak detection

A leak detection port between the packing and O-ring seal signals the need for packing replacement.

Chiksan Sour Gas Swivel Joint

Proven packing design

Elastomeric packing with stainless steel anti-extrusion ring and secondary O-ring seal are used to isolate the races and bearings from line fluid.

Sour Gas Service

FMC Technologies manufactures Chiksan sour gas swivel joints in accordance with the National Association of Corrosion Engineers (NACE) Standard MR-01-75 and the American Petroleum Institute's (API) Standard RP-14-E. These swivel joints are specially heat-treated and inspected for controlled hardness. Because the specially heat-treated steel required for sour gas does not provide a hard enough bearing surface, Chiksan sour gas swivel joints use snap-in ball races for extra strength and high load-bearing capacity. Sour gas swivel joints come standard with integral Weco wing union end connections. They also have a leak-detection port between the packing and the O-ring seal. If leakage past the packing should occur, it is forced through the port, signaling the need for packing replacement. For positive identification, all Chiksan sour gas swivel joints are stamped "Sour Gas" or "NACE MR-01-75" using low-stress dot stamping and painted with an olive green, zinc-chromate primer that is unique to sour gas equipment.

Chiksan Swivel Joints for Sour Gas Service

High-Pressure Swivel Joints

6,000 psi cold working pressure, 2 and 3-inch sizes;
Weco wing union end connections

Longsweep Swivel Joints

7,500 psi cold working pressure, 3-inch size;
Weco wing union end connections

10,000 psi cold working pressure, 1, 2, 3, and 4-inch sizes;
Weco wing union end connections

15,000 psi cold working pressure, 2 and 3-inch sizes;
Weco wing union end connections

Original Chiksan® Swivel Joints

Chiksan Swivel Joint Styles

Chiksan swivel joints are available from stock in nine basic styles or configurations. These styles permit 360-degree rotation and movement in one, two, or three planes. They can be combined in an unlimited variety of ways to suit practically any installation. All Chiksan swivel joints are assembled using two or more standard pieces.



Although Chiksan swivel joints can be rotated while under fluid pressure, they are not recommended for services requiring continuous rotary motion. See inside back cover for additional Warnings and Cautions.



Style 20



Style 30



Style 40




Style 50



Style 60




Style 70



Style 80



Style 10

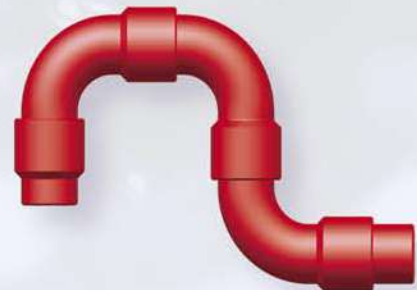

Style 100

See specifications tables (pages SJ1A to SJ8A) for sizes, dimensions, weights, materials, and part numbers

Chiksan[®] Swivel Joints

Chiksan Cementing and Circulating Hoses

Chiksan cementing and circulating hoses can handle a complete range of standard and sour gas fluids at cold working pressures up to 15,000 psi. These rugged, all-steel hoses are available in 1 to 3-inch sizes and configurations to meet virtually any need. All materials meet ASTM or AISI standards.

Recommended service

High-pressure discharge lines, water lines, temporary flow lines, well testing lines, cementing and circulating lines, and other high-pressure applications

Features

- All designs feature Chiksan swivel joints which provide flexibility, absorb shock and vibration, and maximize flow characteristics
- Weco wing union connections ensure fast, pressure-tight make-up and break-out without threading, welding, or special connections
- Chiksan hoses fold up easily and quickly for transportation and storage
- Designs are available for sour gas services at cold working pressures up to 15,000 psi



See specifications tables (page SJ5A) for sizes, dimensions, weights, materials, and part numbers.

Chiksan Coiled Tubing Reel Swivel

15,000 psi cold working pressure; 2 and 3-inch sizes

Recommended service

High-pressure coiled tubing applications

Reliable UV packing

With zero failures in thousands of high-pressure gate valve stem seal applications worldwide, proprietary UV packing provides greater sealability with lower torque than comparable seals.

Fast, easy field maintenance

The swivel internal components can be serviced from the front without removing the housing from the coiled tubing unit.



Converts for sour gas service

By changing out the Weco wing union subs, the assembly is converted to a sour gas swivel. This exclusive feature reduces inventory and lowers costs.

Stepped bearing races

Exclusive stepped bearing race geometry enables easy centering of the mandrel relative to the packing. Stepped design also provides low bearing stresses and torque for longer bearing life.

Consult factory for special coiled tubing applications.

Original Weco® Wing Unions

Simple identification

New, factory-shipped Weco wing unions are color coded for quick identification.

Choice of end connections

Weco wing unions are available with line pipe or tubing threads, butt weld, or non-pressure seal end connections.

Positive identification


For positive identification in the field, all Weco wing union nuts and subs include the Weco name, union figure number, size, and pressure rating. Additionally, Weco wing unions for sour gas service are stamped "Sour Gas."

Fast make-up, break-out

Three lug nuts and self-locking ACME threads provide fast make-up and break-out regardless of position or space restrictions.

Interchangeable parts

All Weco wing union parts of the same figure number, size, and pressure rating are interchangeable. This feature makes it easy to match male and female subs that are frequently made-up and broken-out.

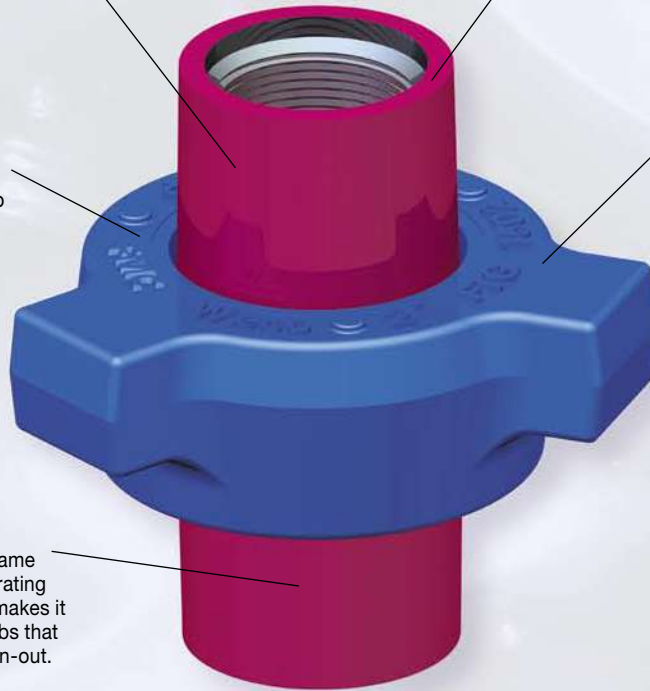

Weco wing unions are the most complete line of standard and sour-gas service pipe connectors in the world. Available in 1 to 12-inch nominal pipe sizes with cold working pressures up to 20,000 psi, Weco wing unions are manufactured using the finest raw materials, tooling procedures, and heat-treating techniques available. Materials meet ASTM and AISI standards. Each union is carefully inspected to ensure long, dependable service in the most extreme conditions. Like all pressure containing products, Weco wing unions require special handling (see inside back cover for Warnings and Cautions).

Original Weco® Wing Unions


Figure Number	Assembly Color Key Standard Service	Pressure Rating, psi, bar				Nominal Pipe Sizes, inches											Notes	
		Standard		Sour Gas (see note 8)		1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10		12
		Cold Working	Test	Cold Working	Test	25	32	40	50	65	80	100	125	150	200	250		300
100		1,000 69	1,500 103	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
200		2,000 138	3,000 207	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1
206		2,000 138	3,000 207	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1
207		2,000 138	3,000 207	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1
211		2,000 138	3,000 207	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
400		2,500 172	3,750 259	2,500 172	3,750 259	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1,5,6
400		4,000 276	6,000 414	4,000 276	6,000 414	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1,4
600		6,000 414	9,000 621	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1
602		6,000 414	9,000 621	6,000 414	9,000 621	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1,2
1002		10,000 690	15,000 1034	7,500 517	11,250 776	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1,2,3,9
1003		10,000 690	15,000 1034	7,500 517	11,250 776	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1,3,10
1502		15,000 1034	22,500 1551	10,000 690	15,000 1034	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	1,2,3
2002		20,000 1379	30,000 2068	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	7
2202		NA	NA	15,000 1034	22,500 1551	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	7

Notes

- NA- Not Available
 - All end connections with line pipe threads unless otherwise noted.
- Butt-weld available. Consult factory for wall thickness.
 - Non pressure seal configurations available.
 - Power make-up must be used for line pipe threaded connections to achieve rated cold working pressure.
 - Line pipe threads are not offered for sour gas service in this figure number.
 - Line pipe threads are not recommended for sour gas service above 4-inch nominal pipe size.
 - Figure 400 available in 5 1/2- and 7-inch OD with casing threads.
 - Available in butt-weld ends only.
8. All unions for sour gas service are painted olive green, stamped "SOUR GAS" or "NACE MR-01-75", and have specially modified material properties.
9. 5 and 6-inch sizes rated at 7,500 psi CWP and 11,250 test; 5 and 6-inch unions for sour gas service rated at 5,000 psi CWP and 7,500 psi test.
10. 4 and 5-inch sizes rated at 7,500 psi CWP and 11,250 test; 4 and 5-inch unions for sour gas service rated at 5,000 psi CWP and 7,500 psi test.
- Sour gas service
FMC manufactures Weco sour gas unions in accordance with the National Association of Corrosion Engineers (NACE) Standard MR-01-75 and American Petroleum Institute's (API) Standard RP-14-E.


Original Weco® Wing Unions

Proven Seal Designs

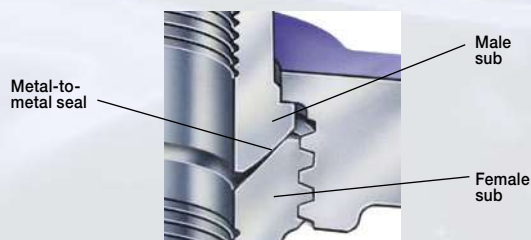


Low-Pressure Services (1,000 to 2,000 psi)

Weco wing unions for low-pressure services feature a primary metal-to-metal seal. The spherical surface of the male sub and the conical surface of the female sub provide a large, ball-and-cone sealing surface. This metal-to-metal seal remains leak-proof even when one surface is slightly pitted or misaligned.

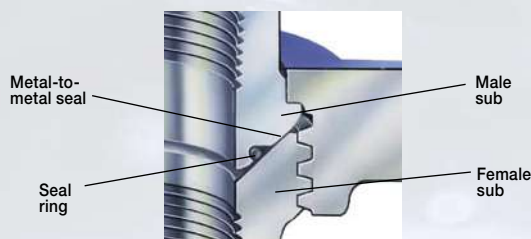


Medium-Pressure Services (2,000 to 4,000 psi)

Many Weco wing union designs supplement the metal-to-metal seal with a resilient O-ring in the male sub. The replaceable O-ring extends union life and protects the metal-to-metal seal against corrosion.

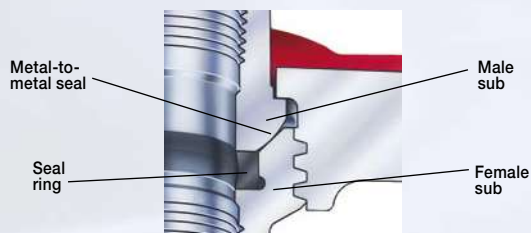


High-Pressure Services (6,000 to 20,000 psi)

Weco wing unions for high-pressure services feature a replaceable, lip-type seal ring in the female sub. This primary seal protects the secondary metal-to-metal seal from abrasion and corrosion while minimizing flow turbulence.

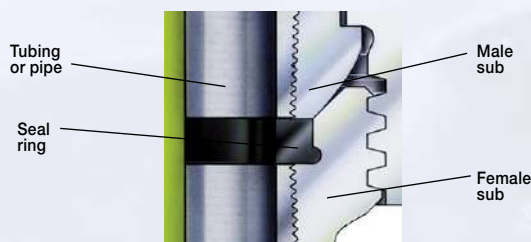

NPS (Non-Pressure Seal) Option Figures 602, 1002, and 1502

The Weco non-pressure seal option is especially designed for abrasive, high-pressure wing union services where welded connections are undesirable. This design provides strong, permanent end connections without butt welding. The union ends are shop assembled to pipe or tubing. An epoxy thread compound is used to secure the connection.



Interchangeable parts

Weco wing union parts of the same figure number, size, and pressure rating are interchangeable, making it easy to match male and female subs that are frequently made-up and broken-out. For positive identification in the field, all Weco wing union nuts and subs include the Weco name, figure number, size, and pressure rating. It is vital that the user positively identify union connections and components to avoid mismatch conditions and potential union failure. See inside back cover for details.

Original Weco® Wing Unions



Figure 100

1,000 psi cold working pressure

Recommended service
Manifold and line connections

Features

- Pressure-tight make-up with hammer
- Economical low-pressure union



Figure 200

2,000 psi cold working pressure

Recommended service
General service manifolds and lines

Features

- Economical, general-purpose union
- 1 to 4-inch sizes

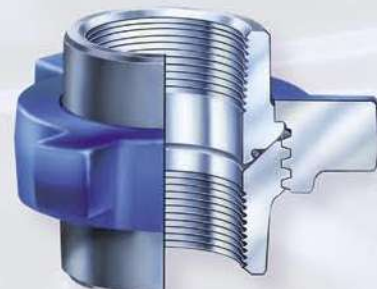


Figure 206

2,000 psi cold working pressure

Recommended service
Manifold line connections, suction service,
and corrosion service

Features

- O-ring in male sub improves sealing and protects metal-to-metal seal against corrosion
- Replaceable O-ring extends union service life
- 1 to 10-inch sizes



Figure 207

2,000 psi cold working pressure

Recommended service
Seals manifold connections and protects union threads

Features

- Parts interchangeable with Figures 200 and 206
- O-ring on blanking cap ensures a leak-free seal
- Cap can be tapped for pressure gauge
- Available in butt-weld



Figure 211

2,000 psi cold working pressure

Recommended service
Production systems with electrolytic corrosion problems

Features

- Laminated insulating rings provide 35 million ohms resistance across the union
- O-ring in male sub provides a positive primary seal
- Seal ring in female sub delivers a positive secondary seal

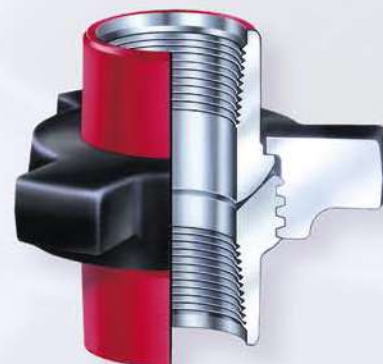


Figure 400

4,000 psi cold working pressure through 4-inch sizes; 2,500 psi cold working pressure, 5 through 12-inch sizes

Recommended service
Manifold line connections, pump suction,
and mud services

Features

- 2-1/2 through 12-inch sizes have O-rings for primary seal
- Butt-weld available
- Available for sour gas service

See specifications tables (pages WU1A to WU6A) for sizes, dimensions, weights, materials, and part numbers.

Original Weco® Wing Unions



Figure 600

6,000 psi cold working pressure

Recommended service

Steam service, boiler connections, and manifold line connections for production, drilling, and well servicing

Features

- Bronze seat provides primary seal; will not rust in water services



Figure 602

6,000 psi cold working pressure

Recommended service

Manifold line connections and mud service

Features

- Replaceable, lip-type seal provides primary seal, protects secondary metal-to-metal seal, and minimizes flow turbulence
- Butt-weld available
- Available for sour gas service at 6,000 psi cold working pressure

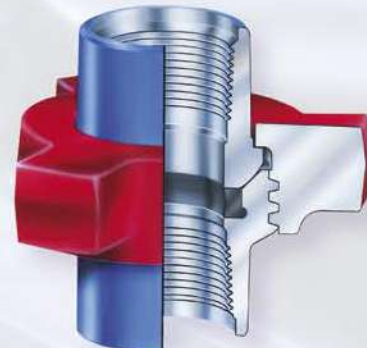


Figure 1002

10,000 psi cold working pressure through 4-inch sizes; 7,500 psi cold working pressure, 5 and 6-inch sizes

Recommended service

Cementing, fracturing, acidizing, testing, and choke-and-kill lines

Features

- Replaceable, lip-type seal
- 5 and 6-inch sizes have O-rings for primary seals
- Available for sour gas service: 7,500 psi cold working pressure
- Butt-weld available

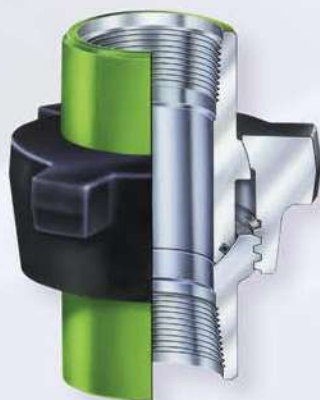


Figure 1003 Misaligning union

10,000 psi cold working pressure, 2 and 3-inch sizes; 7,500 psi cold working pressure, 4 and 5-inch sizes

Recommended service

For high-pressure connections where lines cannot be aligned

Features

- Ball seat provides positive seal with up to 7-1/2° misalignment; 2-inch model up to 4°
- Replaceable O-ring on male sub provides primary seal
- Available with threaded or butt-weld ends

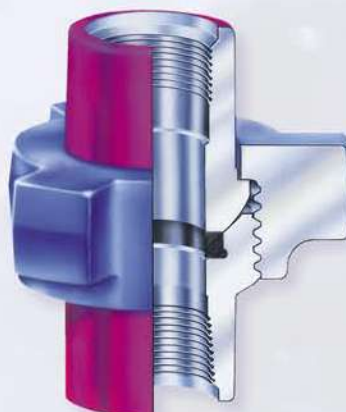


Figure 1502

15,000 psi cold working pressure

Recommended service

Cementing, fracturing, acidizing, testing, and choke-and-kill lines

Features

- Replaceable, lip-type seal
- Available for sour gas service: 10,000 psi cold working pressure; butt-weld or non-pressure seal configurations only
- Butt-weld available



Figure 2002

20,000 psi cold working pressure

Recommended service

Cementing, fracturing, acidizing, testing, and choke-and-kill lines

Features

- Replaceable, lip-type seal
- 2 and 3-inch line sizes
- Butt-weld configurations only

See specifications tables (pages WU1A to WU6A) for sizes, dimensions, weights, materials, and part numbers.


Original Weco® Wing Unions

Quick, positive identification

Weco unions for sour gas service are stamped "Sour Gas" and painted with an olive green zinc-chromate primer to ensure quick, positive identification.

Controlled hardness

Weco union subs and nuts are specially heat-treated and 100% tested for controlled hardness.

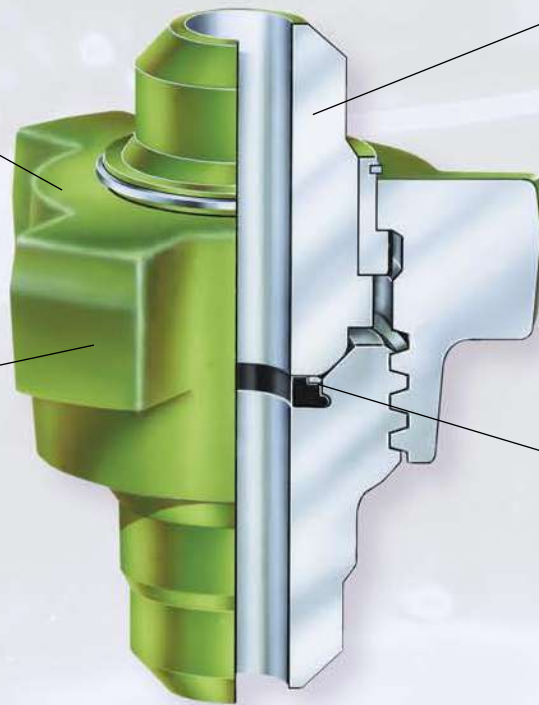

Meets industry standards

All Weco wing unions for sour gas service meet both the National Association of Corrosion Engineers Standard MR-01-75 and API Standard RP-14-E.

Positive sealing

Primary fluoroelastomer seal and metal-to-metal seal combine to deliver positive sealing throughout the stated pressure range.

Figure 2202

Sour Gas Service

FMC Technologies manufactures Weco sour gas wing unions in accordance with the National Association of Corrosion Engineers (NACE) Standard MR-01-75 and American Petroleum Institute (API) Standard RP-14-E. These outstanding, field-proven unions are specially heat treated for controlled hardness. For fast, sure identification, each Weco sour gas union is stamped "Sour Gas" or "NACE MR-01-75" using low stress dot stamping and painted with an olive green zinc-chromate primer that is unique to sour gas equipment. FMC Fluid Control uses fluoroelastomer seals or O-rings in all sour gas unions, but does not warrant the performance of any elastomer for sour gas service.

Caution: It is possible to interchange sour gas parts with standard service products. Users must adopt safe practices for identification, installation, use, maintenance, and storage of sour gas equipment. (See inside back cover for additional Warnings and Cautions.)

Weco Wing Unions for Sour Gas Service

Figure 400

4,000 psi cold working pressure, 1 through 4-inch sizes; 2,500 psi cold working pressure, 5 through 12-inch sizes; butt-weld only above 4-inch sizes

Figure 602

6,000 psi cold working pressure, 1 through 4-inch sizes

Figure 1002

7,500 psi cold working pressure, 1 through 4-inch sizes; 5,000 psi cold working pressure, 5 and 6-inch sizes

Figure 1003

7,500 psi cold working pressure, 2 and 3-inch sizes; 5,000 psi cold working pressure, 4 and 5-inch sizes

Figure 1502

10,000 psi cold working pressure, 1 through 4-inch sizes; butt-weld or non-pressure seal configurations only

Figure 2202

15,000 psi cold working pressure, 2, 2-1/2, and 3-inch sizes; butt-weld only

See specifications tables (page WU5A) for sizes, dimensions, weights, materials, and part numbers.

Other Weco® Unions



Tank Unions

500 psi maximum line pressure, 6, 8, 10, and 12-inch sizes

Recommended service

Mud tanks, mud tank connecting lines, and pump suction flanges

Features

- Molded nitrile seal provides a compression seal
- Makes up with hammer
- Elongated cross-section of seal ring ensures greater sealing surface when in contact with the pipe
- Accepts up to 7° pipe misalignment
- 6, 8, and 10-inch sizes may be socket welded to pipe or butt welded to tubing; 12-inch sizes require butt-weld



Air-O-Unions


150 psi maximum line pressure, 4, 6, 8, 10, 13-3/8, and 16-inch sizes

Recommended service

Mud suction and return lines and low-pressure fluid lines

Features


- Shot of rig air inflates tube to seal around pipe
- Fast, easy make-up without close alignment
- Allows pipe expansion or misalignment without breaking the seal
- No nuts, bolts, or wrenches required

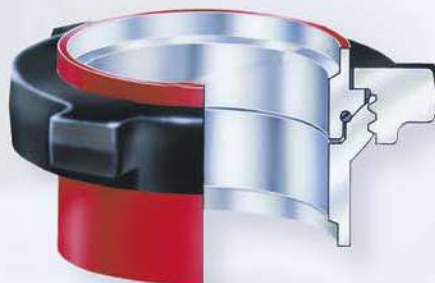

Socket weld



Line pipe threads

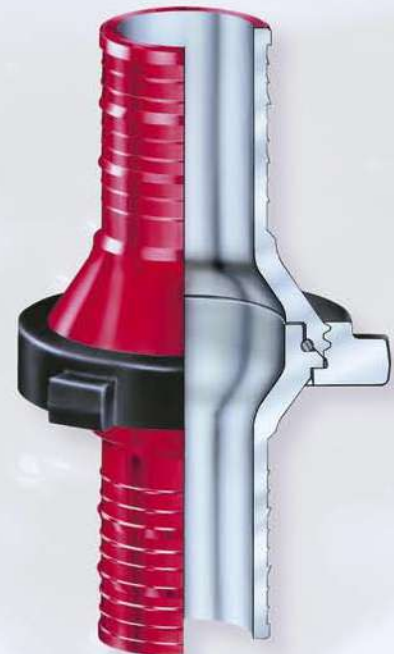

Hose nipple

Suction-Hose Unions

500 psi maximum line pressure, 4, 5, and 6-inch sizes

Recommended service

Mud system suction lines

Features

- Replaceable O-ring seal
- Choice of end fittings
- Secondary metal-to-metal seal
- Socket welded, threaded, or hose nipple



Socket weld with female plug assembly

See specifications tables (pages WU5A and WU6A) for sizes, dimensions, weights, materials, and part numbers.


Weco® Fittings and Pup Joints

Weco Fittings

Up to 20,000 psi cold working pressure;
1 to 4-inch bore sizes

Recommended service

High-pressure well servicing lines, fracturing lines, testing lines, cementing and circulating lines, and other well service and stimulation applications

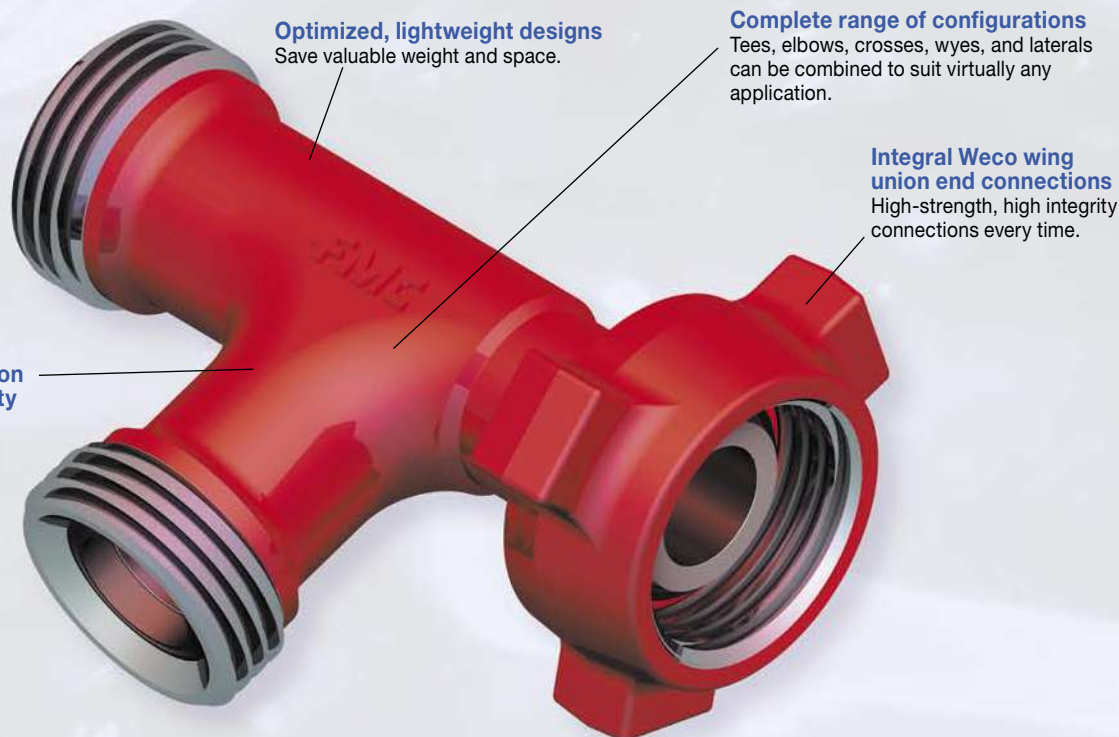

Weco fittings and pup joints have been optimized for minimum weight and size. These rugged products are ideal for handling a complete range of standard and sour gas well servicing fluids at pressures up to 20,000 psi. Available in 1 to 4-inch sizes, both fittings and pups feature forged construction with integral Weco wing union ends (see page WU2 for high-pressure and NPS seal designs) for a high-strength, high-integrity connection every time. Weco pups and fittings come with full material traceability and can be supplied with Charpy impact values. Like all pressure containing products, Weco pups and fittings require special handling (see inside back cover for Warnings and Cautions).

Weco® Fittings and Pup Joints

Weco Pup Joints

Up to 20,000 psi cold working pressure;
2, 3, and 4-inch bore sizes, lengths to 20 feet

Recommended Service

High-pressure well servicing lines, fracturing lines, testing lines, cementing and circulating lines, and other well service and stimulation applications

Integral and NPS designs

Available in integral and non pressure seal designs to suit virtually all oilfield applications.

Recessed area for name tag


Provides protected area for pup joint identification.

Specially machined shoulder prevents nut from sliding down pup

Design decreases risk of injury to personnel.


Weco wing union nut detaches for field repair

Permits fast, easy service at the job site.

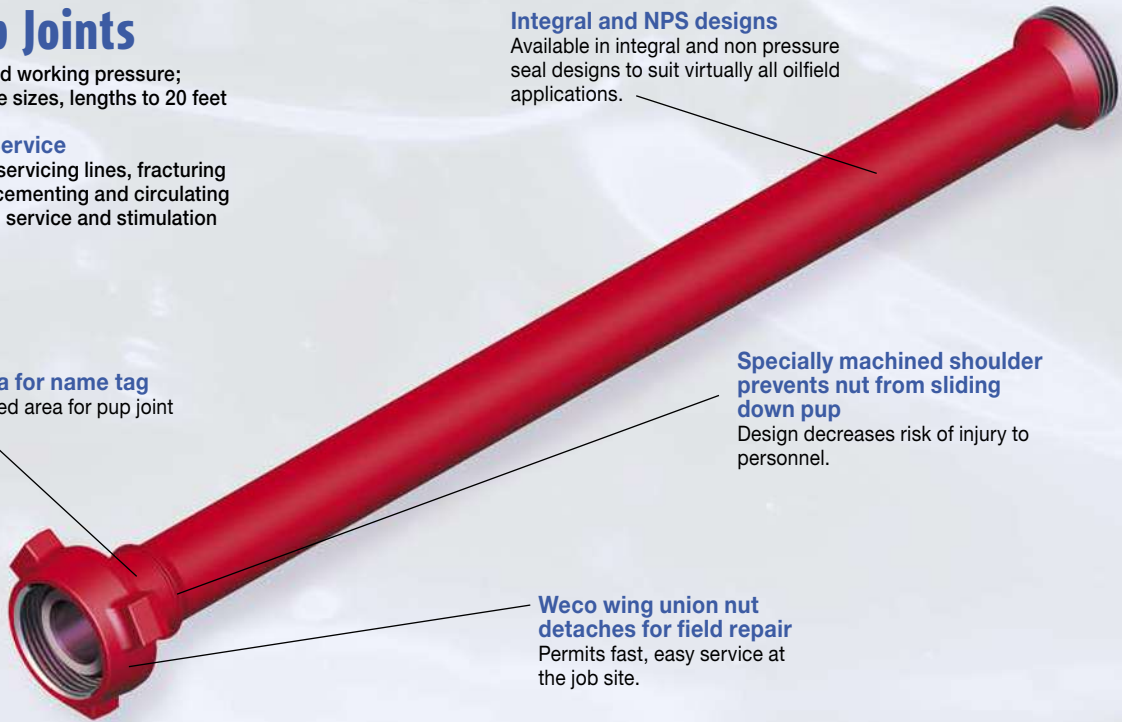

OPTIMIZED FORGED FITTINGS

FMC Technologies offers the smallest, lightest integral forged fittings on the market. To minimize the size and weight of each fitting, engineers performed a finite element stress analysis on each fitting body design. From these results, the geometry was optimized for weight, and forgings were developed for each size and type of fitting. The fittings were then subjected to laboratory and field testing. The result: You save weight and space without sacrificing service life or safety.

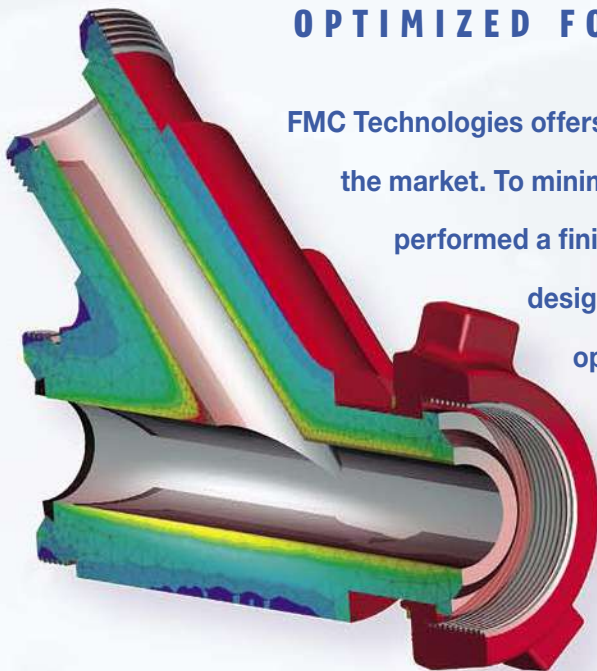

Integrated Services



Chiksan® and Weco® flowline products have set global industry standards for quality, reliability, and service life for almost 75 years. However, superior products alone are not enough to meet the diverse challenges that operators and well-servicing companies face today. FMC's Integrated Services business pledges to meet or exceed customer expectations by providing value through services, technology, and competencies, and by safely following established standards without compromise. This total solutions approach to managing fluid control equipment is helping flowline customers worldwide realize the maximum value and service life from their fluid control assets.

Integrated Services

World's Leading Flowline Service Solution



Home Customer Assets Receiving Service Shipping Administration Log Out
Paul Brown is currently logged on to Facility (Stephenville Support). | App. Ver. 1.0.4 43:54

Service

Locate Job Results Job Header Load Check Add Assets SoW

Primary SN	Asset Description	Svc Req.	Status	Reason
10280400P005	Plug Valve, 2", DR150, 2" 1502 M x 2" 1...	Yes	Passed	
10100400S000	Straight Joint, 2" x 72", NPST, 2" 1502 M...	Yes	Passed	
10220400S005	Adapter, 3", Integral, 3" 1502 F x 3" 150...	Yes	Passed	
10100400S006	Straight Joint, 2" x 72", NPST, 2" 1502 M...	Yes	Passed	
10280400P001	Plug Valve, 2", DR150, 2" 1502 M x 2" 1...	Yes	Passed	
10220400S009	Adapter, 3", Integral, 3" 1502 F x 3" 150...	No	Passed	

Home Customer Assets Receiving Service Shipping Administration Log Out
Paul Brown is currently logged on to Facility (Stephenville Support). | App. Ver. 1.0.4 43:27

Asset Manager

Search Criteria End Conigs Results

Search Existing Customer Descriptions

Serial	Degree
Serial Type: <input checked="" type="radio"/> Primary <input type="radio"/> Secondary	Length
Customer: 1-Customer A	Service
Customer Loc.: Location 1	Manufacturer: FMC
Current Loc.: Location 1	Mfg. Item No.
Container: Container 05	CWP: 15000
Customs Stat. <input type="checkbox"/> EU <input type="checkbox"/> FCG	OD
Status	ID
Family Code: Swivel	Nominal Size: 3"
Style: LS1S S50	

Locate Assets

Assigned Service Levels

Service Level	Date Req.	3rd Pty. Job	Certificate	Date
Annual Level 3	10/28/2004			
Annual Level 2	10/28/2004			10/28/2004
MPI	10/28/2004			
Annual Level 1	10/28/2004			10/28/2004

Asset Wall Readings

ID	Type	New	Minimum	Reading
0	Man.	0.4170	0.4170	0.4550

Ready.

InteServ Database

FMC's proprietary web-based database delivers unmatched standards for flowline data collection, documentation, and certifications. Built-in planning and tracking tools identify equipment usage patterns, inspection, and repair intervals to ensure the right products are shipped to the right job in top working condition. The bottom line: Customers improve safety, maximize equipment utilization, and minimize equipment maintenance costs.

- ▶ Fully integrated global database
- ▶ Internet-based asset tracking and reporting system
- ▶ Flexible data extraction tools for detailed asset analysis

Integrated Services



Asset Management

Tracking and maintaining the volume of flowline equipment used in high-pressure pumping services is a major undertaking. Asset management is a cooperative program where specially trained FMC personnel inventory, track, and maintain a customer's flowline assets at their facility or in a designated FMC facility. Asset management is helping customers worldwide significantly increase equipment utilization rates and service life while reducing total costs and safety concerns.



Mobile Inspection and Repair

FMC introduced its mobile inspection and repair service in 1996. Today, the industry's largest fleet of mobile units performs complete inspection and repair services at customer locations throughout the world. The mobile package includes inspection, testing, repair, documentation, and certification with the goal of extending product life and reducing operator costs.

Integrated Services



*Putting
Technology*
*Into
Service*

Service Centers

To keep Chiksan and Weco products in top working condition, FMC offers factory rebuild services from strategic locations worldwide. FMC is aggressively working to expand its in-house refurbishment services to meet growing demand, including butterfly valve and cement head inspection and repair.



Spare Parts Management

Chiksan and Weco products are manufactured to precise dimensional tolerances using specialized materials of construction, unique machining processes, and strict quality control measures. The service life of these products can be extended with routine maintenance and periodic repair using genuine FMC spare parts.



Chiksan® and Weco® Specifications

Contents

Weco Plug Valve Specifications	PV1A
Weco Check Valve Specifications	CV1A
Weco Butterfly Valve and Actuator Specifications	BV1A
Chiksan Swivel Joint Specifications	SJ1A
Weco Wing Union Specifications	WU1A
Weco Fitting Specifications	F1A
Weco Pup Joint Specifications	PJ1A
Recommended Temperature Ranges	TR1A
Warnings and Cautions	IBC


Weco® Plug Valve Specifications

Plug Valves


Model	Nominal Size, in.	Part No.	Weco End Connection*	Service	CWP psi (bar)	Weight lb (kg)
ULT 150	1	P516114	1502	Standard	15,000 (1034)	37 (16.8)
	1	P524578	1002	Sour	10,000 (690)	37 (16.8)
	1x2	P516108	1502	Standard	15,000 (1034)	43 (19.5)
	1x2 (.38 bore)	P516146	1502	Standard	15,000 (1034)	58 (26.3)
	1x2	P516208	1002	Sour	10,000 (690)	37 (16.8)
DR 150	2	3247527	1502	Standard	15,000 (1034)	93 (42.2)
	2	3248705	1002	Sour	10,000 (690)	93 (42.2)
DR 200	2	3223008	2002	Standard	20,000 (1380)	83 (37.6)
	2	3234183	2202	Sour	15,000 (1034)	83 (37.6)
ULT 150 (Manual)	3	3265904	1502	Standard	15,000 (1034)	238 (108)
ULT 100 (Manual)	3	P501010	1002	Sour	10,000 (690)	241 (109)
ULT 150 (Hydraulic)	3	3265123	1502	Standard	15,000 (1034)	337 (153)
ULT 100 (Hydraulic)	3	3267427	1002	Sour	10,000 (690)	340 (154)
ULT 150 (Handwheel)	3	3265122	1502	Standard	15,000 (1034)	288 (131)
ULT 100 (Handwheel)	3	3265257	1002	Sour	10,000 (690)	288 (131)
ULT 200 (Hydraulic)	3	P519087	2002	Standard	20,000 (1380)	754 (342)
ULT 200 (Handwheel)	3	P519453	2002	Standard	20,000 (1380)	634 (288)
ULT 200 (Handwheel)	3	P522233	2202	Sour	15,000 (1034)	640 (290)
ULT 100 (Hydraulic)	4	P518352	1002	Standard	10,000 (690)	738 (335)
ULT 100 (Handwheel)	4	P518356	1002	Standard	10,000 (690)	660 (299)
ULT 150 (Hydraulic)	4	P516015	1502	Standard	15,000 (1034)	774 (351)
ULT 150 (Handwheel)	4	P519749	1502	Standard	15,000 (1034)	660 (299)

Note: 1", 1x2" ULT 150, DR150 and DR200 plug valves can be furnished with hydraulic actuators.

* Other end connections are available. Consult factory.

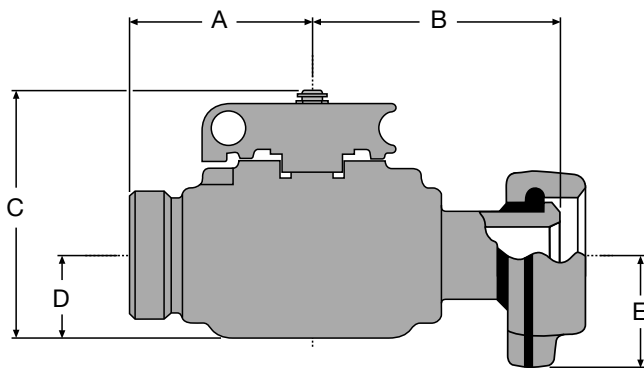


DR 150 with Manual Operator

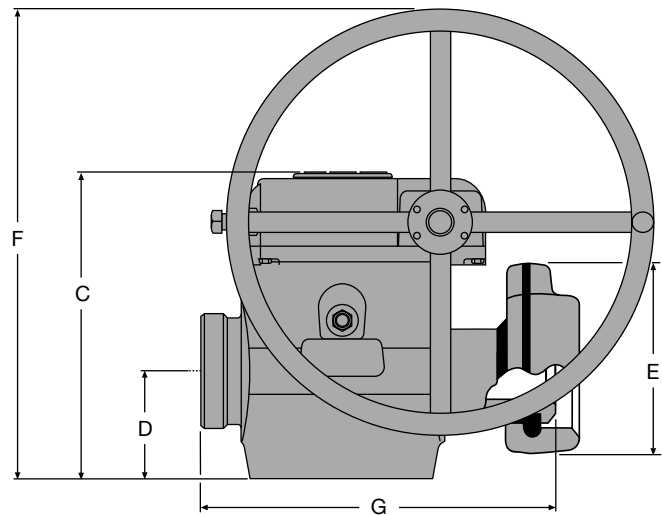


ULT 150 with Handwheel Operator

Weco® Plug Valve Specifications

Model	Nominal Size, in.	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	G in. (mm)
ULT 150	1	4.69 (119)	5.88 (149)	6.59 (167)	1.75 (45)	2.88 (73)	—	—
	1	4.69 (119)	5.88 (149)	6.59 (167)	1.75 (45)	2.88 (73)	—	—
	1x2	4.69 (119)	5.88 (149)	6.59 (167)	1.75 (45)	3.93 (100)	—	—
	1x2 (.38 bore)	4.69 (119)	5.88 (149)	6.59 (167)	1.75 (45)	3.93 (100)	—	—
	1x2	4.69 (119)	5.88 (149)	6.59 (167)	1.75 (45)	3.93 (100)	—	—
DR 150	2	6 (152)	7.88 (200)	8.05 (205)	2.62 (67)	3.93 (100)	—	—
	2	6 (152)	7.88 (200)	8.05 (205)	2.62 (67)	3.93 (100)	—	—
DR 200	2	6.06 (154)	9.19 (233)	8.05 (205)	2.62 (67)	3.76 (96)	—	—
	2	6.06 (154)	9.19 (233)	8.05 (205)	2.62 (67)	3.76 (96)	—	—
ULT 150 (Manual)	3	—	—	14.27 (363)	5 (127)	4.55 (116)	—	15.69 (399)
ULT 100 (Manual)	3	—	—	14.27 (363)	5 (127)	4.55 (116)	—	15.69 (399)
ULT 150 (Hydraulic)	3	—	—	21.81 (554)	5 (127)	4.55 (116)	—	15.69 (399)
ULT 100 (Hydraulic)	3	—	—	21.81 (554)	5 (127)	4.55 (116)	—	15.69 (399)
ULT 150 (Handwheel)	3	—	—	14.47 (368)	5 (127)	4.55 (116)	22.12 (562)	15.69 (399)
ULT 100 (Handwheel)	3	—	—	14.47 (368)	5 (127)	4.55 (116)	22.12 (562)	15.69 (399)
ULT 200 (Hydraulic)	3	—	—	29.63 (753)	6.26 (159)	6 (152)	—	22.08 (561)
ULT 200 (Handwheel)	3	—	—	17.62 (448)	6.26 (159)	6 (152)	36.88 (937)	22.08 (561)
ULT 200 (Handwheel)	3	—	—	17.62 (448)	6.26 (159)	6 (152)	36.88 (937)	22.08 (561)
ULT 100 (Hydraulic)	4	—	—	28.49 (724)	7.00 (118)	4.94 (126)	—	22.85 (580)
ULT 100 (Handwheel)	4	—	—	19.1 (485)	7.00 (118)	4.94 (126)	38.36 (974)	22.85 (580)
ULT 150 (Hydraulic)	4	—	—	28.49 (724)	7.00 (118)	6.14 (156)	—	22.85 (580)
ULT 150 (Handwheel)	4	—	—	19.1 (485)	7.00 (118)	6.14 (156)	38.29 (973)	22.85 (580)

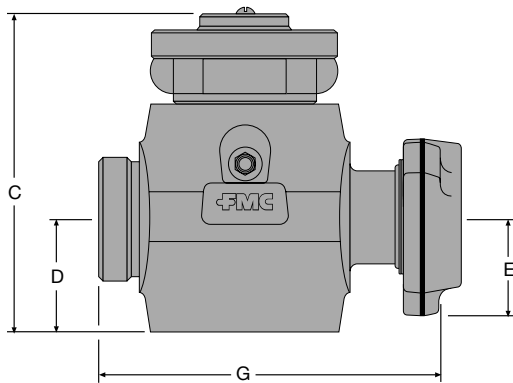

ULT 150 with Manual Operator

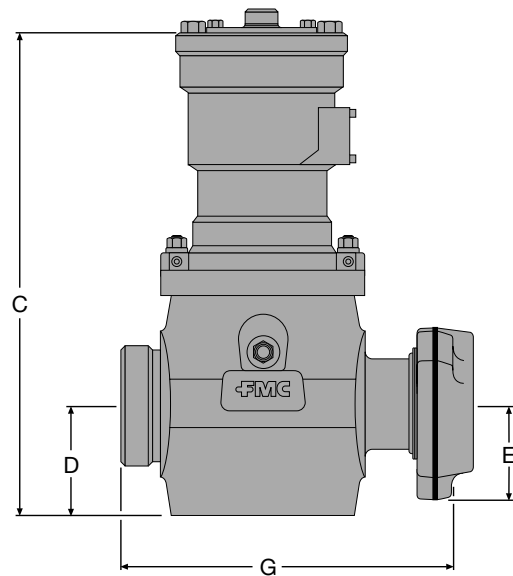

ULT 150 with Hydraulic Actuator

Weco® Check Valve Specifications

Top Entry Check Valves

Nominal Size, in.	Cold Working Pressure, psi (bar)	End Connections	Flow Orientation	Part Number	A in. (mm)	B in. (mm)	Weight lb (kg)
3	15,000 (1034)	1502 FxM	Standard	P521623	15.67 (398)	9.54 (242)	116 (53)
	15,000 (1034)	1502 MxF	Reverse	P524440	15.67 (398)	9.54 (242)	116 (53)
4	10,000 (690)	1002 FxM	Standard	P525809	19.75 (502)	11.88 (302)	239 (109)
	15,000 (1034)	1502 FxM	Standard	P524760	19.75 (502)	11.88 (302)	276 (126)

In-Line Flapper Check Valves

Nominal Size, in.	Cold Working Pressure, psi (bar)	End Connections	Flow Orientation	Part Number	A in. (mm)	B in. (mm)	Weight lb (kg)
1.5	15,000 (1034)	1502 MxF	Reverse	P519734	14.04 (357)	7 (178)	81 (37)
2	15,000 (1034)	1502 FxM	Standard	3269173	14.04 (357)	7 (178)	84 (38)
	15,000 (1034)	1502 MxF	Reverse	3269472	14.04 (357)	7 (178)	84 (38)
	20,000 (1379)	2002 FxM	Standard	3269158	16.91 (430)	8 (203)	123 (56)
3	6,000 (414)	602 FxM	Standard	P501959	15.67 (398)	8.12 (206)	121 (55)
	6,000 (414)	602 MxF	Reverse	P519978	15.67 (398)	8.12 (206)	124 (56)
	6,000 (414)	602 FxF	Standard	P502035	12.27 (312)	8.12 (206)	100 (45)
	15,000 (1034)	1502 FxM	Standard	3269052	15.67 (398)	8.12 (206)	122 (55)
	15,000 (1034)	1502 MxF	Reverse	P518432	15.67 (398)	8.12 (206)	126 (57)
	20,000 (1379)	2002 FxM	Standard	P520099	22.79 (579)	13 (330)	442 (201)
4	6,000 (414)	602 FxM	Standard	P513204	22.79 (579)	12.25 (311)	378 (171)
	10,000 (690)	1002 FxM	Standard	P517718	21.13 (537)	11.25 (286)	280 (127)
	15,000 (1034)	1502 FxM	Standard	P517894	22.79 (579)	12.25 (311)	385 (175)
	15,000 (1034)	1502 MxF	Reverse	P518468	22.79 (579)	12.25 (311)	385 (38)

Dart Check Valves


Nominal Size, in.	Cold Working Pressure, psi (bar)	End Connections	Flow Orientation	Part Number	A in. (mm)	B in. (mm)	Weight lb (kg)
1.5	15,000 (1034)	1502 FxM	Standard	P525269	14.04 (357)	10.31 (262)	86 (39)
	15,000 (1034)	1502 MxF	Reverse	P523811	14.04 (357)	10.31 (262)	86 (39)
2	15,000 (1034)	1502 FxM	Standard	P510771	14.04 (357)	10.31 (262)	87 (40)
3	15,000 (1034)	1502 FxM	Standard	P510773	15.67 (398)	11.43 (290)	130 (59)

Note: Some sizes and models are available with a vent cap connection for relief of trapped pressure on downstream side which can occur in flowlines when valve is checked closed. Consult factory for more information.


Consult factory for configurations available for models not shown above as well as installation instructions.

Weco® Check Valve Specifications


Top Entry Check Valves

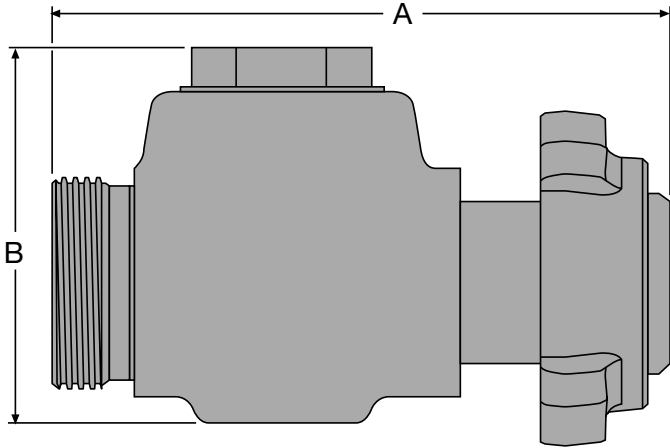

In-Line Flapper Check Valves

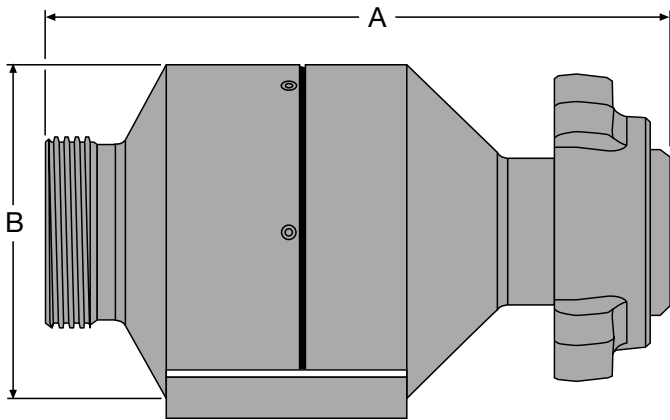

Dart Check Valves

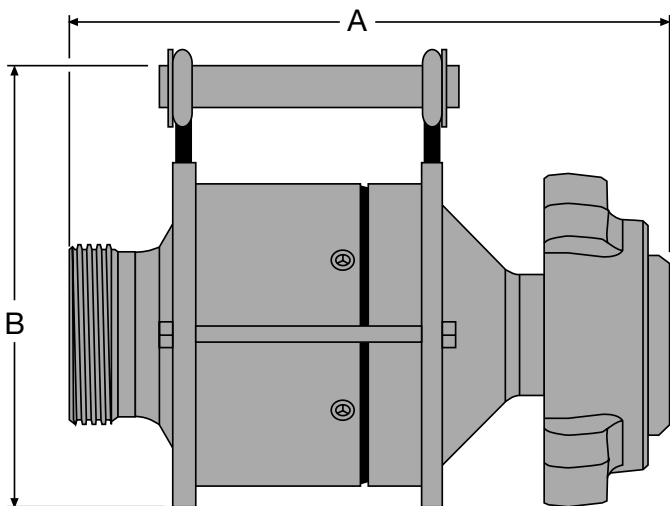

Weco® Butterfly Valve Specifications

Model 12



Sizes, in.	2	2 1/2	3	4	6	8	10	12	14	16		
Part No.	3227485	3227486	3227487	3245819	3227493	3232417	3227495	3227496	3255865	3255869		
Dimensions, in., mm	A	4 ^{31/32} 126	5 ^{5/8} 150	5 ^{29/32} 150	7 ^{9/32} 185	7 ^{25/32} 198	9 ^{13/32} 239	10 ^{21/32} 271	12 ^{5/32} 309	14 ^{31/32} 380	17 ^{7/16} 443	
	B	3 76.2	3 ^{11/32} 84.9	3 ^{5/8} 92.1	4 ^{1/4} 108	5 ^{5/16} 135	7 178	8 ^{1/4} 210	9 ^{9/4} 248	10 ^{3/8} 264	11 ^{15/16} 303	
	C	4 ^{1/8} 105	4 ^{7/8} 124	5 ^{3/8} 137	6 ^{7/8} 175	8 ^{3/4} 222	11 279	13 ^{3/8} 340	16 ^{1/8} 410	17 ^{11/16} 449	20 ^{1/8} 511	
	D	2 ^{1/16} 52.4	2 ^{1/2} 63.5	3 ^{1/16} 77.8	4 ^{1/16} 103	6 ^{1/16} 154	8 ^{1/16} 205	10 254	12 305	13 ^{1/4} 337	15 ^{1/4} 387	
	E	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	7/8 Sq. 22.2	7/8 Sq. 22.2	1 ^{1/8} Sq. 28.6	1 ^{1/8} Sq. 28.6	2* 50.8	
	F	4 102	4 102	4 102	4 102	4 102	6 152	6 152	6 152	6 152	6 152	8 203
	G	1 ^{1/32} 26.2	1 ^{1/32} 26.2	1 ^{1/32} 26.2	1 ^{9/32} 32.5	1 ^{9/32} 32.5	1 ^{9/32} 32.5	1 ^{9/32} 32.5	1 ^{9/32} 32.5	1 ^{9/32} 32.5	1 ^{9/32} 32.5	3 ^{3/16} 81
	H	1 ^{5/8} 41	1 ^{3/4} 45	1 ^{3/4} 45	2 51	2 ^{1/8} 54	2 ^{1/2} 64	2 ^{1/2} 64	3 76	3 76	4 102	
	I	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1	9/16 14.3	9/16 14.3	9/16 14.3	9/16 14.3	17/32 13.5	
	J	3 ^{1/4} 82.6	3 ^{1/4} 82.6	3 ^{1/4} 82.6	3 ^{1/4} 82.6	3 ^{1/4} 82.6	5 127	5 127	5 127	5 127	6 ^{1/2} 165	

Body: Ductile Iron Disc: Ductile Iron Stems: 416 Stainless Steel Seat: Nitrile
 * 2 inch diameter with 1/2 inch keyway

Model 12N (For use with lightweight industrial flanges.)

Sizes, in.	2	3	4	5	6	
Part No.	3229885	3230052	3229886	3229887	3229888	
Dimensions, in., mm	A	4 ^{31/32} 126	5 ^{29/32} 150	7 ^{9/32} 185	7 ^{9/32} 185	7 ^{25/32} 198
	B	3 76.2	3 ^{5/8} 92.1	4 ^{1/4} 108	4 ^{13/16} 122	5 ^{5/16} 135
	C	4 ^{1/8} 105	5 ^{3/8} 137	6 ^{7/8} 175	7 ^{3/4} 197	8 ^{3/4} 222
	D	2 ^{1/16} 52.4	3 ^{1/16} 77.8	4 ^{1/16} 103	5 ^{1/16} 129	6 ^{1/16} 154
	E	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9
	F	4 101.6	4 101.6	4 101.6	4 101.6	4 101.6
	G	1 ^{1/32} 26.2	1 ^{1/32} 26.2	1 ^{9/32} 32.5	1 ^{9/32} 32.5	1 ^{9/32} 32.5
	H	1 ^{5/8} 41.3	1 ^{3/4} 44.5	2 50.8	2 ^{1/8} 54	2 ^{1/8} 54
	I	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1
	J	3 ^{1/4} 82.6	3 ^{1/4} 82.6	3 ^{1/4} 82.6	3 ^{1/4} 82.6	3 ^{1/4} 82.6
	K	3 ^{3/4} 82.6	4 ^{3/8} 111	6 ^{3/8} 162	6 ^{29/32} 175	8 ^{1/2} 216
	L	4 102	6 152	6 152	6 152	8 203
	M	5/16 7.9	5/16 7.9	3/8 9.5	3/8 9.5	3/8 9.5

Body: Ductile Iron Disc: Ductile Iron
 Stems: 416 Stainless Steel Seat: Nitrile

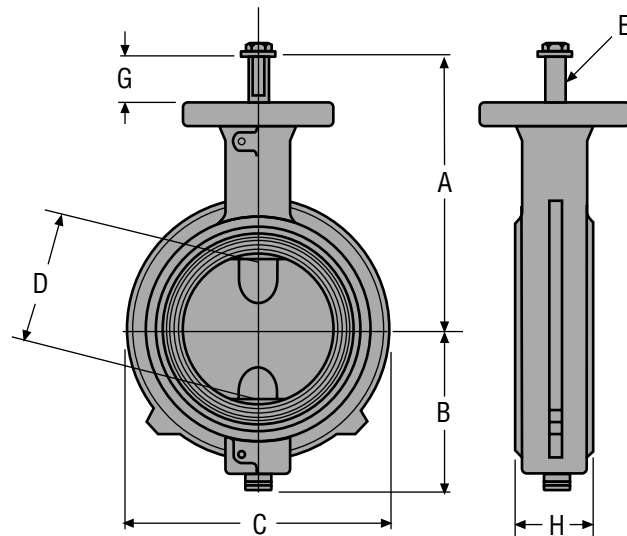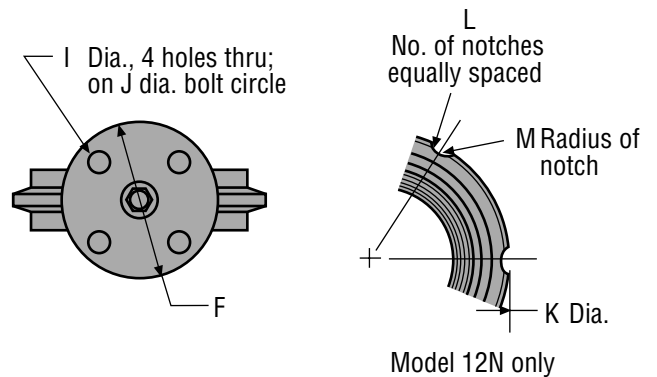


BV1A

Weco® Butterfly Valve Specifications

Model 22

Sizes, in.	2	2 1/2	3	4	5	6	8	10	12	
Part No.	3225730	3225731	3225732	3225733	3225734	3225735	3225736	3225737	3225738	
Dimensions, in., mm	A	$7\frac{9}{32}$ 185	$7\frac{25}{32}$ 198	$8\frac{1}{16}$ 205	$9\frac{5}{32}$ 233	$9\frac{21}{32}$ 245	$10\frac{9}{32}$ 258	$11\frac{19}{32}$ 294.5	$12\frac{27}{32}$ 326	$14\frac{11}{32}$ 364
	B	$\frac{3}{8}$ 76.2	$3\frac{11}{32}$ 84.9	$3\frac{5}{8}$ 92.1	$4\frac{1}{4}$ 108	$4\frac{13}{16}$ 122	$5\frac{5}{16}$ 135	$\frac{7}{8}$ 178	$8\frac{1}{4}$ 210	$9\frac{3}{4}$ 248
	C	$4\frac{1}{8}$ 105	$4\frac{7}{8}$ 124	$5\frac{3}{8}$ 131	$6\frac{7}{8}$ 175	$7\frac{3}{4}$ 197	$8\frac{3}{4}$ 222	11 279	$13\frac{3}{8}$ 340	$16\frac{1}{16}$ 408
	D	$2\frac{1}{16}$ 52.4	$2\frac{1}{2}$ 63.5	$3\frac{1}{16}$ 77.8	$4\frac{1}{16}$ 103	$5\frac{1}{16}$ 129	$6\frac{1}{16}$ 154	$8\frac{1}{16}$ 205	10 254	12 305
	E	$\frac{5}{8}$ Sq. 15.9	$\frac{5}{8}$ Sq. 15.9	$\frac{5}{8}$ Sq. 15.9	$\frac{5}{8}$ Sq. 15.9	$\frac{5}{8}$ Sq. 15.9	$\frac{5}{8}$ Sq. 15.9	$\frac{7}{8}$ Sq. 22.2	$\frac{7}{8}$ Sq. 22.2	$1\frac{1}{8}$ Sq. 28.6
	F	$\frac{4}{8}$ 101.6	$\frac{4}{8}$ 101.6	$\frac{4}{8}$ 101.6	$\frac{4}{8}$ 101.6	$\frac{4}{8}$ 101.6	$\frac{4}{8}$ 101.6	$\frac{6}{8}$ 152.4	$\frac{6}{8}$ 152.4	$\frac{6}{8}$ 152.4
	G	$1\frac{1}{32}$ 26.2	$1\frac{1}{32}$ 26.2	$1\frac{1}{32}$ 26.2	$1\frac{9}{32}$ 32.5	$1\frac{9}{32}$ 32.5	$1\frac{9}{32}$ 32.5	$1\frac{9}{32}$ 32.5	$1\frac{9}{32}$ 32.5	$1\frac{9}{32}$ 32.5
	H	$1\frac{5}{8}$ 41.3	$1\frac{3}{4}$ 44.5	$1\frac{3}{4}$ 44.5	2 50.8	$2\frac{1}{4}$ 54	$2\frac{1}{4}$ 54	$2\frac{1}{2}$ 63.5	$2\frac{1}{2}$ 63.5	3 76.2
	I	$\frac{7}{16}$ 11.1	$\frac{7}{16}$ 11.1	$\frac{7}{16}$ 11.1	$\frac{7}{16}$ 11.1	$\frac{7}{16}$ 11.1	$\frac{7}{16}$ 11.1	$\frac{9}{16}$ 14.3	$\frac{9}{16}$ 14.3	$\frac{9}{16}$ 14.3
	J	$3\frac{1}{4}$ 82.6	$3\frac{1}{4}$ 82.6	$3\frac{1}{4}$ 82.6	$3\frac{1}{4}$ 82.6	$3\frac{1}{4}$ 82.6	$3\frac{1}{4}$ 82.6	5 127	5 127	5 127

Body: Ductile Iron Disc: Ductile Iron Stems: 416 Stainless Steel Seat: Nitrile

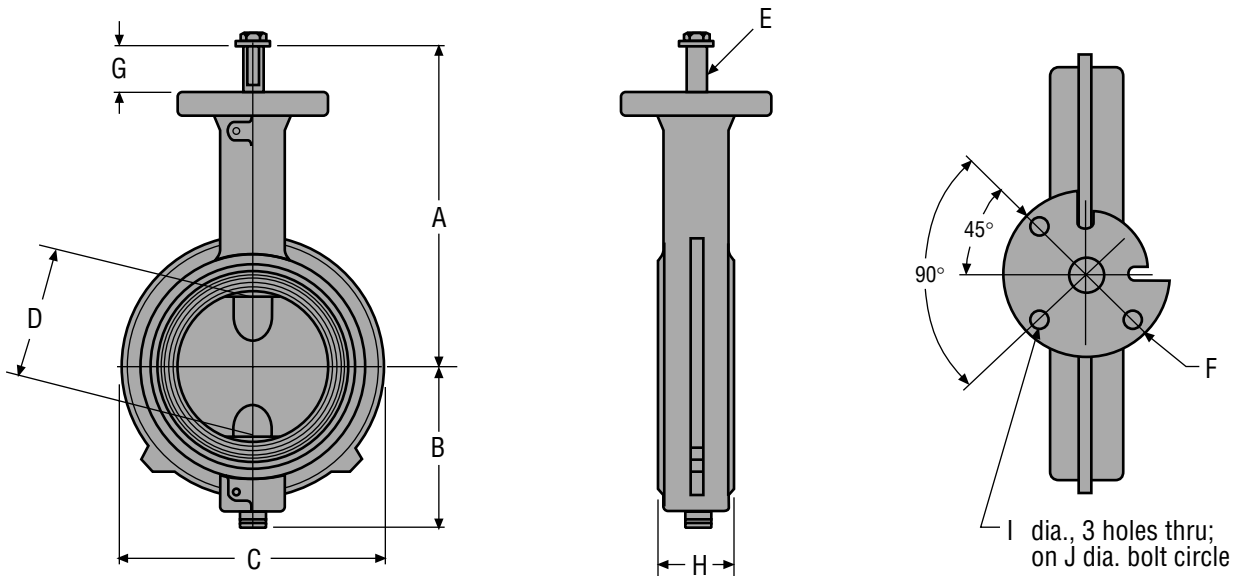

BV2A

Weco® Butterfly Valve Specifications


Model 22L

Sizes, in.	2	2 1/2	3	4	5	6	8	10	12	14	16	18	20	24		
Part No.	3225748	3225749	3225750	3225751	3225752	3225753	3225754	3225755	3225756	3255867	3255870	3255871	3255872	3255873		
Dimensions, in., mm	A	7 ⁹ / ₃₂ 185	7 ²⁵ / ₃₂ 198	8 ¹ / ₁₆ 205	9 ⁵ / ₃₂ 233	9 ²¹ / ₃₂ 245	10 ⁵ / ₃₂ 258	11 ¹⁹ / ₃₂ 295	12 ²⁷ / ₃₂ 326	14 ¹¹ / ₃₂ 364	14 ³¹ / ₃₂ 380	17 ⁷ / ₁₆ 443	18 ⁷ / ₁₆ 468	19 ⁷ / ₁₆ 494	23 ³ / ₄ 603	
	B	3 76.2	3 ¹¹ / ₃₂ 84.9	3 ⁵ / ₈ 92.1	4 ¹ / ₄ 108	4 ¹³ / ₁₆ 122	5 ⁵ / ₁₆ 135	7 178	8 ¹ / ₄ 210	9 ³ / ₄ 248	10 ³ / ₈ 264	11 ¹⁵ / ₁₆ 303	12 ¹⁵ / ₁₆ 329	13 ¹⁵ / ₁₆ 354	17 ¹ / ₈ 435	
	C	6 152	7 178	7 ¹ / ₂ 191	9 229	10 254	11 279	13 ¹ / ₂ 343	16 406	19 483	20 ³ / ₄ 527	23 ³ / ₄ 591	25 635	27 ¹ / ₄ 692	32 813	
	D	2 ¹ / ₁₆ 52.4	2 ¹ / ₂ 63.5	3 ¹ / ₁₆ 77.8	4 ¹ / ₁₆ 103	5 ¹ / ₁₆ 129	6 ¹ / ₁₆ 154	8 ¹ / ₁₆ 205	10 254	12 305	13 ¹ / ₄ 337	15 ⁹ / ₃₂ 388	17 ⁹ / ₃₂ 439	19 ¹ / ₄ 489	23 584	
	E	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	5/8 Sq. 15.9	7/8 Sq. 22.2	7/8 Sq. 22.2	1 1/8 Sq. 28.6	1 1/8 Sq. 28.6	2* 50.8	2* 50.8	2* 50.8	2.5** 63.5	
	F	4 101.6	4 101.6	4 101.6	4 101.6	4 101.6	4 101.6	6 152.4	6 152.4	6 152.4	6 152.4	6 152.4	8 203.2	8 203.2	8 203.2	8 203.2
	G	1 ¹ / ₃₂ 26.2	1 ¹ / ₃₂ 26.2	1 ¹ / ₃₂ 26.2	1 ⁹ / ₃₂ 32.5	1 ⁹ / ₃₂ 32.5	1 ⁹ / ₃₂ 32.5	1 ⁹ / ₃₂ 32.5	1 ⁹ / ₃₂ 32.5	1 ⁹ / ₃₂ 32.5	1 ⁹ / ₃₂ 32.5	3 ³ / ₁₆ 81	3 ³ / ₁₆ 81	3 ³ / ₁₆ 81	4 ³ / ₈ 111	
	H	1 ⁵ / ₈ 41.3	1 ³ / ₄ 44.5	1 ³ / ₄ 44.5	2 50.8	2 ¹ / ₈ 54	2 ¹ / ₈ 54	2 ¹ / ₂ 63.5	2 ¹ / ₂ 63.5	3 76.2	3 76.2	4 101.6	4 ¹ / ₂ 114.3	5 127	6 ¹ / ₈ 154	
	I	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1	7/16 11.1	9/16 14.3	9/16 14.3	9/16 14.3	9/16 14.3	17/32 13.5	17/32 13.5	17/32 13.5	21/32 16.7	
	J	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	5 127	5 127	5 127	5 127	6 ¹ / ₂ 165.1	6 ¹ / ₂ 165.1	6 ¹ / ₂ 165.1	6 ¹ / ₂ 165.1	
	K	5/8 -11	5/8 -11	5/8 -11	5/8 -11	3/4 -10	3/4 -10	3/4 -10	7/8 -9	7/8 -9	1-8	1-8	1 1/8 -7	1 1/8 -7	1 1/4 -7	
	L	4 102	4 102	4 102	8 204	8 204	8 204	8 204	12 305	12 305	12 305	12 305	16 406	16 406	20 508	20 508
	M	4 ³ / ₄ 121	5 ¹ / ₂ 140	6 152	7 ¹ / ₂ 191	8 ¹ / ₂ 216	9 ¹ / ₂ 241	11 ³ / ₄ 299	14 ¹ / ₄ 362	17 432	18 ³ / ₄ 476	21 ¹ / ₄ 540	22 ³ / ₄ 578	25 635	29 ¹ / ₂ 750	

Body: Ductile Iron Disc: Ductile Iron Stems: 416 Stainless Steel Seat: Nitrile

* 2 inch diameter with 1/2 inch keyway

** 2.5 inch diameter with 5/8 inch keyway


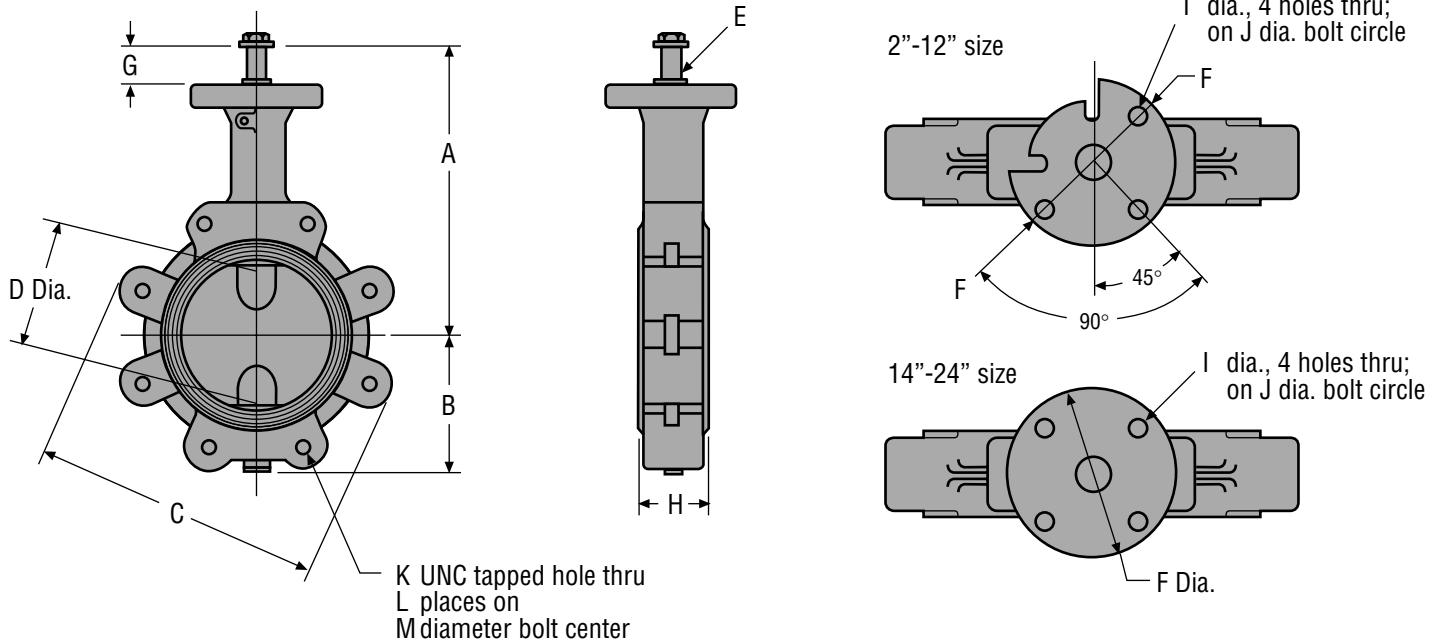


Weco® Butterfly Valve Accessories

Standard and Throttle Handles



		Valve Size, in.			
		2 - 3	4 & 6	8 & 10	12
Standard for Models 12, 12N		3234078	3231336	3227946	3227947
Standard for Models 22, 22L		3234092	3231337	3216208	3216224
Throttling for all Models		3235577	3235578	3228018	3228019
Dimensions, in., mm	A	$2\frac{3}{8}$ 60.3	$2\frac{1}{2}$ 63.5	3 76.2	$2\frac{3}{4}$ 69.9
	B	$9\frac{1}{2}$ 241	$10\frac{7}{8}$ 276	15 381	19 483
	C	$2\frac{3}{4}$ 69.9	$2\frac{3}{4}$ 69.9	4 102	4 102
	D	$1\frac{1}{16}$ 36.5	$1\frac{11}{16}$ 42.9	$1\frac{11}{16}$ 42.9	$1\frac{11}{16}$ 42.9
	E	4 102	4 102	6 152	6 152

Note: Butterfly valve assemblies include a standard detent plate for on-off operations. Handle assemblies for throttling service include a throttling detent plate to replace the standard detent plate on the valve.

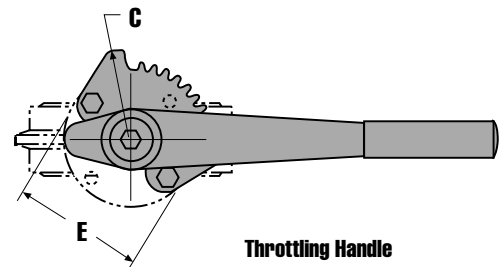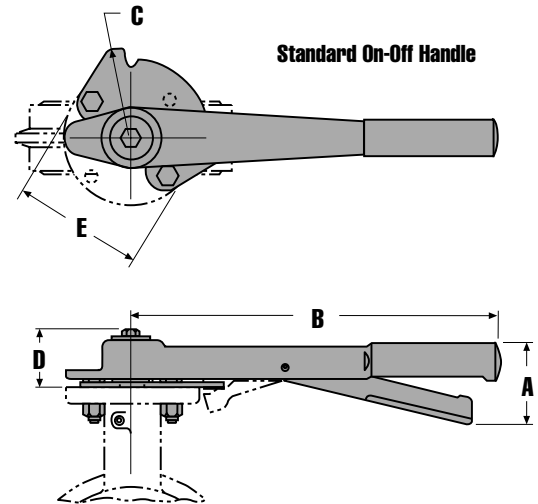

Gear Operators


		Valve Size, in.					
		2 - 6	8 & 10	12	14	16 - 20	24
Standard Handwheel		3217838	3217839	3217840	3256506	3256507	3256508
Chain-wheel Attachment		3223689	3223690	3223691	3256839	3256840	CF
Dimensions in., mm	A	$2\frac{1}{8}$ 54	$2\frac{1}{2}$ 63.5	$2\frac{1}{2}$ 63.5	3 76.2	$3\frac{5}{8}$ 92.1	5 127
	B	$1\frac{1}{16}$ 27	$1\frac{1}{4}$ 31.8	$1\frac{1}{4}$ 31.8	$1\frac{1}{2}$ 38.1	$2\frac{3}{8}$ 60.3	$2\frac{1}{2}$ 63.5
	C	$6\frac{1}{2}$ 165	10 254	10 254	14 356	14 356	14 356
	D	5 127	$7\frac{1}{2}$ 191	$7\frac{1}{2}$ 191	15 381	15 381	15 381
	E	$4\frac{3}{4}$ 121	7 178	7 178	$7\frac{3}{4}$ 197	$9\frac{5}{8}$ 245	$11\frac{5}{8}$ 295
	F	$1\frac{5}{8}$ 41.3	$2\frac{9}{16}$ 65.1	$2\frac{9}{16}$ 65.1	$3\frac{1}{8}$ 79.4	$4\frac{1}{2}$ 114	$4\frac{5}{8}$ 118
	G	$6\frac{5}{16}$ 160	$9\frac{1}{8}$ 232	$11\frac{5}{8}$ 295	$15\frac{1}{4}$ 387	$15\frac{1}{4}$ 387	$17\frac{1}{4}$ 438
	H	$3\frac{1}{2}$ 88.9	$4\frac{3}{4}$ 121	$4\frac{3}{4}$ 121	$5\frac{5}{8}$ 143	$5\frac{3}{4}$ 146	$9\frac{1}{2}$ 241
	I	3 76.2	$3\frac{1}{2}$ 88.9	$3\frac{1}{2}$ 88.9	$3\frac{1}{2}$ 88.9	$3\frac{1}{2}$ 88.9	$3\frac{1}{2}$ 88.9
	J	4 102	$6\frac{1}{4}$ 159	$6\frac{1}{4}$ 159	$6\frac{1}{2}$ 165	9 229	$10\frac{1}{4}$ 260

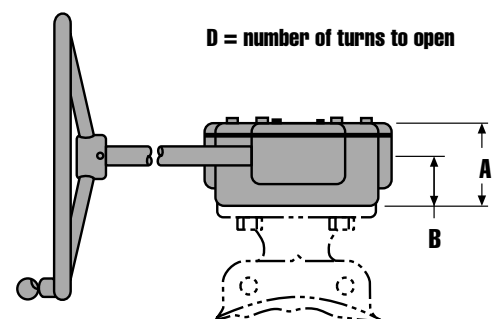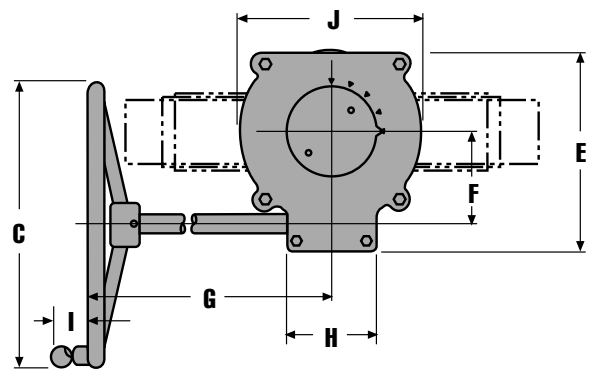

Weco® Pneumatic Actuator Specifications

Pneumatic Actuators - Double Acting

Model	330	350	550	550A	590	590A
Sizes, in.	2 - 6	5 - 6	8 - 10	12	10	12
Part #	3235438	3237369	3236771	3237183	3237886	3237887
Weight	lb kg	8½ 3.9	18 8.2	35 15.9	35 15.9	55 25
A	in. mm	12 ⁹ / ₁₆ 319	16 ¹ / ₈ 511	19 ⁹ / ₈ 492	19 ⁹ / ₈ 492	22 559
B	in. mm	8 ³ / ₄ 222	12 ⁵ / ₁₆ 313	13 ¹¹ / ₁₆ 348	13 ¹¹ / ₁₆ 348	15 ⁷ / ₈ 403
C	in. mm	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	5 ³ / ₁₆ 133	5 ³ / ₁₆ 132	5 ³ / ₁₆ 139
D	in. mm	7 ¹³ / ₁₆ 198	7 ¹³ / ₁₆ 198	12 ¹ / ₁₆ 308	12 ¹ / ₁₆ 308	12 ¹ / ₁₆ 308
E	in. mm	1 ¹⁵ / ₁₆ 49.2	1 ¹⁵ / ₁₆ 49.2	3 ³ / ₁₆ 90.5	3 ³ / ₁₆ 90.5	3 ³ / ₁₆ 81
F	in. mm	2 ¹ / ₁₆ 52.4	2 ¹ / ₁₆ 52.4	3 ¹ / ₁₆ 77.8	3 ¹ / ₁₆ 77.8	3 ¹ / ₁₆ 77.8
G	in. mm	2 50.8	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	5 ⁵ / ₁₆ 135
H	in. mm	3 ⁷ / ₈ 98.4	6 ¹ / ₂ 165.1	6 ¹ / ₂ 165	6 ¹ / ₂ 165	10 ⁹ / ₁₆ 268
J	in. mm	4 ⁵ / ₁₆ 110	4 ⁵ / ₁₆ 110	5 ⁵ / ₁₆ 135	5 ⁵ / ₁₆ 135	5 ⁵ / ₁₆ 135
K	in. mm	1 ⁷ / ₁₆ 36.5	1 ⁷ / ₁₆ 36.5	1 ⁷ / ₈ 47.6	1 ⁷ / ₈ 47.6	1 ⁷ / ₈ 47.6
L	in.	3/8 -16 UNC	3/8 -16 UNC	1/2 -13 UNC	1/2 -13 UNC	1/2 -13 UNC
M	in. mm	3¼ 82.6	3¼ 82.6	5 127	5 127	5 127
N	in. mm	5/8 15.9	5/8 15.9	7/8 22.2	1½ 28.6	7/8 22.2

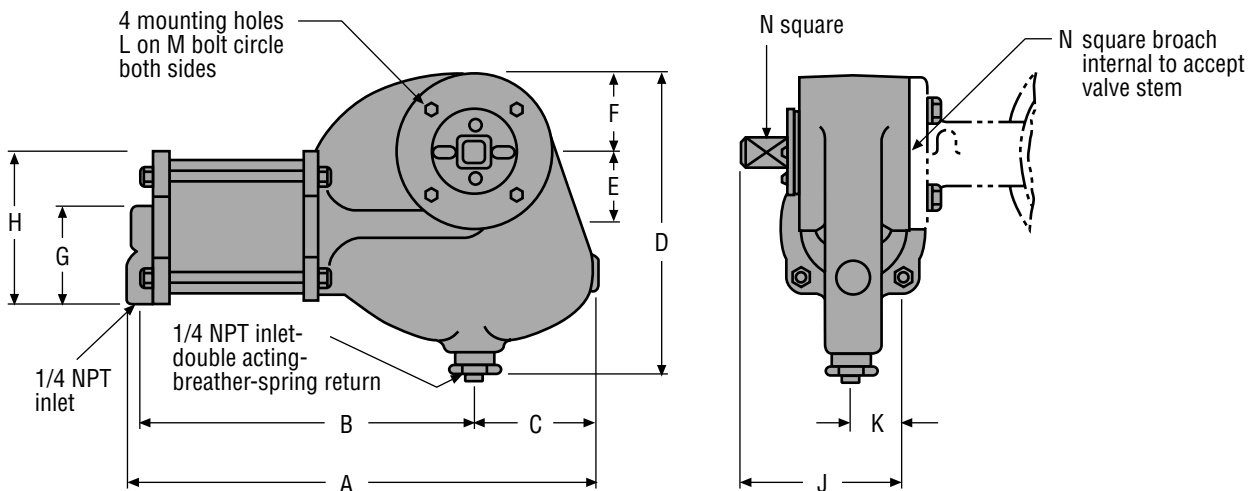


BV5A

Weco® Pneumatic Actuator Specifications

Pneumatic Actuators - Spring Acting

Model	332	333	354	355	596	597A	
Sizes, in.	2 - 2 1/2	3 - 4	3 - 4	5 - 6	8 - 10	12	
Part #	3237525	3237368	3237373	3237515	3237865	3237866	
Weight	lb kg	13 5.9	15 6.8	25 11.3	31 14.1	93 42.2	106 48.1
A	in. mm	19 ⁹ / ₁₆ 497	19 ⁹ / ₁₆ 497	20 ¹ / ₄ 514	20 ¹ / ₄ 514	30 ¹ / ₈ 765	30 ¹ / ₈ 765.2
B	in. mm	15 ³ / ₄ 400	15 ³ / ₄ 400	16 ⁷ / ₁₆ 418	16 ⁷ / ₁₆ 418	24 610	24 610
C	in. mm	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	5 ¹ / ₁₆ 129	5 ³ / ₁₆ 132
D	in. mm	8 ⁵ / ₈ 219	8 ⁵ / ₈ 219	8 ⁵ / ₈ 219	8 ⁵ / ₈ 219	13 ¹ / ₈ 333	13 ¹ / ₈ 333
E	in. mm	1 ¹⁵ / ₁₆ 49.2	1 ¹⁵ / ₁₆ 49.2	1 ¹⁵ / ₁₆ 49.2	1 ¹⁵ / ₁₆ 49.2	3 ³ / ₁₆ 81	3 ³ / ₁₆ 81
F	in. mm	2 ¹ / ₁₆ 52.4	2 ¹ / ₁₆ 52.4	2 ¹ / ₁₆ 52.4	2 ¹ / ₁₆ 52.4	3 ¹ / ₁₆ 77.8	3 ¹ / ₁₆ 77.8
G	in. mm	2 50.8	2 50.8	3 ⁵ / ₁₆ 84.1	3 ⁵ / ₁₆ 84.1	5 ⁵ / ₁₆ 135	5 ⁵ / ₁₆ 135
H	in. mm	3 ⁷ / ₈ 98.4	3 ⁷ / ₈ 98.4	6 ¹ / ₂ 165	6 ¹ / ₂ 165	10 ⁹ / ₁₆ 268	10 ⁹ / ₁₆ 268
J	in. mm	4 ⁵ / ₁₆ 110	4 ⁵ / ₁₆ 110	4 ⁵ / ₁₆ 110	4 ⁵ / ₁₆ 110	5 ⁵ / ₁₆ 135	5 ⁵ / ₁₆ 135
K	in. mm	1 ⁷ / ₁₆ 36.5	1 ⁷ / ₁₆ 36.5	1 ⁷ / ₁₆ 36.5	1 ⁷ / ₁₆ 36.5	1 ⁷ / ₈ 47.6	1 ⁷ / ₈ 47.6
L	in.	³ / ₈ -16 UNC	³ / ₈ -16 UNC	³ / ₈ -16 UNC	³ / ₈ -16 UNC	¹ / ₂ -13 UNC	¹ / ₂ -13 UNC
M	in. mm	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	3 ¹ / ₄ 82.6	5 127	5 127
N	in. mm	⁵ / ₈ 15.9	⁵ / ₈ 15.9	⁵ / ₈ 15.9	⁵ / ₈ 15.9	⁷ / ₈ 22.2	1 ¹ / ₈ 28.6

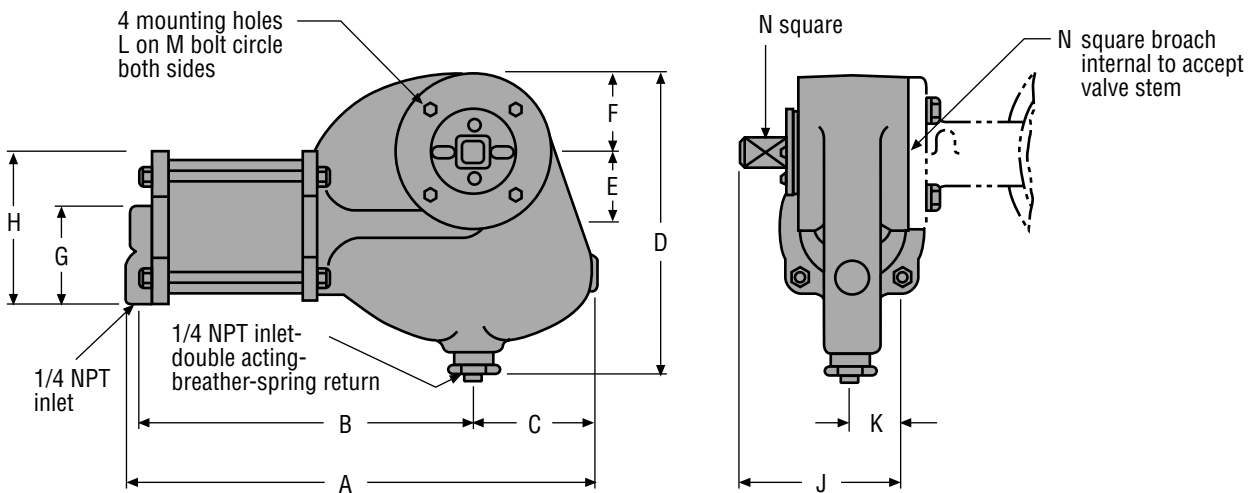


BV6A

Weco® Pneumatic Actuator Specifications

Pneumatic Vane Actuator

Fits 2" - 6" size butterfly valves

Model	200	
Part #	3258068	
Weight	lb	10
	kg	4.54
A	in.	8.66
	mm	220
B	in.	5.56
	mm	141
C	in.	7.00
	mm	178
D	in.	4.62
	mm	117
E	in.	2.31
	mm	58.7
F	in.	3.41
	mm	86.6
G	in.	2.00
	mm	50.8

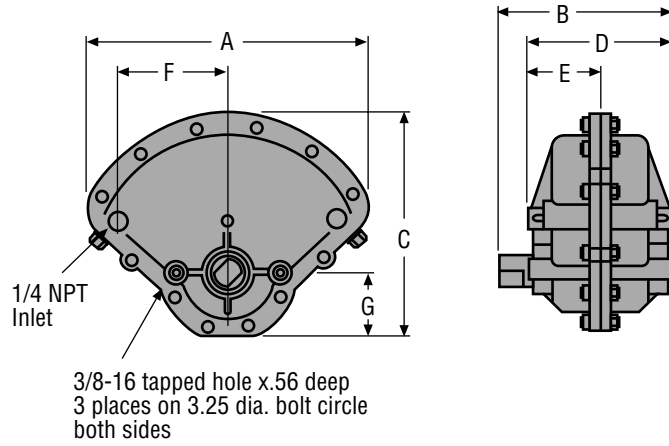

Weco® Actuator Sizing Information

Actuator Sizing Information

Required Operating Torques:

There are three torques to be considered when selecting the proper actuator for a butterfly valve:

- (1) Seating Torque - The torque required to displace a resilient seat and effect shutoff
- (2) Bearing Torque - The torque required to overcome friction forces on the valve shaft bearing surfaces
- (3) Dynamic Torque - Torque due to fluid forces which tend to close the valve.

The torques for resilient seated valves tabulated in this section are the sum of (1) and (2) above for various shut-off pressures. These tabulated values include a safety factor large enough to insure proper valve operation in most general butterfly valve applications. Where unusual service conditions exist (such as likelihood of seat swelling, or low and high temperature seat hardening), an additional safety factor may be applicable.

Dynamic Torque

Dynamic torque is torque on the valve shaft due to the fluid forces on the valve disc. This torque is a function of valve diameter, pressure drop, and a torque coefficient (C_t) which varies with angle opening. Torque is calculated by the equation:

$$T = C_t D^3 \Delta P$$

Where: T = Dynamic torque (in-lb)
D = Valve Dia. (in.)
 C_t = Dynamic torque coefficient
(see table below)

C_t vs. Angle Open										
Angle Open	0	10	20	30	40	50	60	70	80	90
C_t	0	.007	.014	.022	.033	.050	.087	.143	.215	0

Weco® Actuator Sizing Information

Dynamic torque is not usually of major concern in resilient seated butterfly valves unless the line velocity exceeds 20 fps. If line velocity exceeds this, a check should be made to insure that actuator output exceeds the calculated dynamic torque. Dynamic torque should be checked at 80° open for on-off applications.

Dynamic torque is of prime consideration in situations where line velocity is not recovered downstream of the valve. This situation exists on installations where there is an unlimited source and less than 6 diameters of pipe downstream of the valve. If a valve discharges to the atmosphere, the pressure drop across the valve will be equal to the height of water above the valve for all angles of valve opening. This pressure drop must not exceed the pressure drop tabulated in Maximum ΔP vs. Angle

Opening Tables for any angle. If it does, provisions must be made for velocity recovery by adding downstream piping.

Actuator Sizing For Tee Linkages

For standard tee linkage applications where one actuator operates two butterfly valves of the same size with one valve opening as the other valve closes, the actuator sizing will be the same as for a single butterfly valve application. For the actuator sizing for other tandem linkage applications, consult the factory.

Low-Torque Valves

Undercut discs are available for butterfly valve applications that require lower seating torques. For complete information, consult factory.

Actuators Sizing Torque for Weco Butterfly Valves

Valve Size, in.	Seating Torque In Inch-lb (N*m), @ Various Line Pressures						
	0 psi 0 kPa	50 psi 345 kPa	75 psi 517 kPa	100 psi 690 kPa	125 psi 862 kPa	150 psi 1034 kPa	175 psi 1207 kPa
2	90 10	90 10	92 10	94 11	96 11	98 11	100 11
2 1/2	130 15	130 15	134 15	138 16	142 16	146 17	150 17
3	200 23	200 23	206 23	212 24	218 25	224 25	230 26
4	350 40	350 40	366 41	382 43	398 45	414 47	430 49
5	535 60	535 60	566 64	597 67	628 71	659 74	690 78
6	770 87	770 87	823 93	876 99	929 105	982 111	1,035 117
8	1,350 153	1,350 153	1,475 167	1,600 181	1,725 195	1,850 209	1,975 223
10	2,100 237	2,100 237	2,340 264	2,580 292	2,820 319	3,060 346	3,300 373
12	3,000 339	3,000 339	3,400 384	3,800 429	4,200 475	4,600 520	5,000 565
14	3,680 416	4,240 479	4,790 541	5,350 605	5,900 667	6,480 732	
16	4,880 551	5,730 647	6,580 744	7,430 840	8,280 936	9,140 1030	
18	6,230 704	7,460 843	8,690 982	9,920 1121	11,150 1260	12,390 1400	
20	7,770 878	9,380 1060	11,000 1243	12,610 1425	14,230 1610	15,840 1790	
24	11,100 1250	14,010 1580	16,920 1910	19,830 2240	22,740 2570	25,650 2900	

NOTE: For valves using Teflon seats, use torque value at highest standard value rating even for lower pressure applications. Above figures are for values used in wet service, for dry service valves contact factory.

Weco® Actuator Sizing Information

Minimum Air Pressure for Weco Pneumatic Actuators Operating Weco Valves at 175 psi Rated Pressure

Double Acting Models	Actuator air pressure: psi, kPa		
	30 207	50 345	75 517
	Valve Sizes		
330	2" - 4"	2" - 5"	2" - 6"
350	2" - 6"	2" - 6"	2" - 6"
550	8"	8" - 10"	8" - 10"
550A	-	-	12"
590	8" - 10"	8" - 10"	8" - 10"
590A	12"	12"	12"

Spring Return Models	Actuator air pressure: psi (kPa) (Note 1)			
	30 (207) 40 (276)	40 (276) 50 (345)	60 (414) 70 (483)	70 (483) 80 (552)
	Valve Sizes			
332	2" - 2 1/2"	2" - 2 1/2"	2" - 2 1/2"	2" - 2 1/2"
333	-	-	-	2" - 4"
354	2" - 4"	2" - 4"	2" - 4"	2" - 4"
355	-	-	2" - 6"	2" - 6"
596	-	8" - 10"	8" - 10"	8" - 10"
597A	-	-	12"	12"

NOTES

1. Pressures above line for air to open, spring to close. Below line for air to close, spring to open.
2. All of the above ratings are conservative for normal installations. Abnormally high torque conditions may necessitate increased actuator capability.
3. Maximum actuator air pressure 120 psi, except 80 psi maximum pressure on Models 350, 590 and 590A.

Weco Pneumatic Actuator Torque Ratings (note air pressure)

Double Acting Models	Displacement cu. in. cu. cm	Rated torque in. lb N*m	Pressure to achieve rated torque psi kPa
330	25 410	1,150 130	80 552
350	72 1180	1,150 130	30 207
550	120 1970	5,500 622	80 552
550A	120 1970	5,500 622	80 552
590	355 5820	5,500 622	30 207
590A	355 5820	5,500 622	30 207

Spring Return Models	Displacement cu. in. cu. cm	Spring closing torque in. lb N*m	Spring opening torque in. lb N*m	Air opening torque @ 80 psi in. lb N*m	Air closing torque @ 80 psi in. lb N*m
332	25 410	150 17	300 34	1,000 113	850 96
333	25 40	425 48	850 96	725 82	300 34
354	72 1180	425 48	850 96	2,641 298	2,216 250
355	72 1180	1,050 119	2,100 237	2,016 228	966 109
596	355 5820	3,300 373	6,600 746	11,366 1280	8,066 911
597A	355 5820	5,000 565	10,000 1130	9,666 1100	4,666 527

NOTE: All of the above ratings are for normal installations. Abnormally high torque conditions may necessitate increased actuator air pressure.

Weco Model 200 Vane-Type Pneumatic Actuator

Operating Conditions

Maximum Operating Pressure 120 psi (8.27 bar)
 Maximum Housing Pressure 180 psi (12.41 bar)
 Displacement 41 cu. in. (672 cu. cm.)/90°Stroke

Torque Data

Pressure psi kPa	40 276	60 414	80 552	100 690	120 827
Torque Output in. lb mm kg	800 90	1,200 136	1,600 181	2,000 226	2,400 271


Minimum Actuator Pressure for Weco Valves at 175 psi line pressure

Valve Size	2" - 4"	5"	6"
Pressure psi kPa	30 207	45 310	60 414

NOTE: All of the above ratings are for normal installations. Abnormally high torque conditions may necessitate increased actuator air pressure.

Chiksan® Swivel Joint Specifications


TripleStep and Longsweep® Swivel Joints

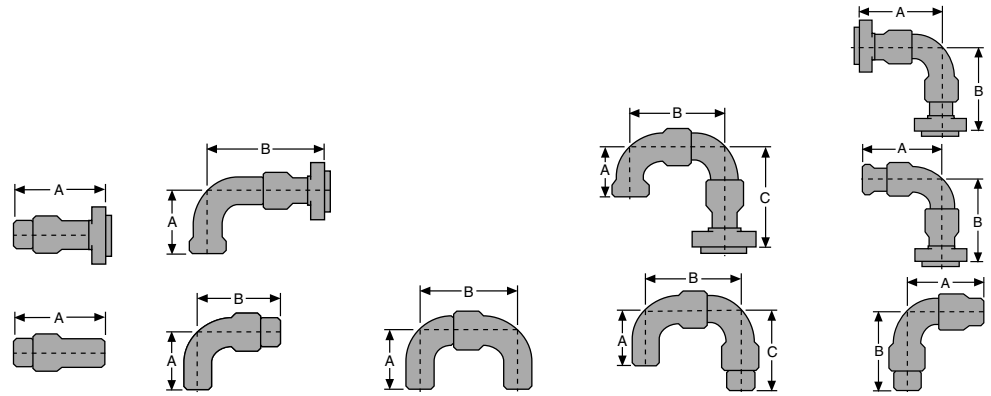

Size/Model Bore in. (mm)	CWP psi (bar)	End Connections	Style 20			Style 30			Style 40				Style 50				Style 60					
			Part No.	A	Wt lb kg	Part No.	A	B	Wt lb kg	Part No.	A	B	Wt lb kg	Part No.	A	B	C	Wt lb kg	Part No.	A	B	Wt lb kg
1" LS10 .86 (22)	10,000 (690)	Threaded	CF			6101537	4.38 111	7.14 181	8 3.6	N/A				3139546	4.38 111	7.28 185	7.02 178	16 7.2	CF			
1" LS15 .88 (22)	15,000 (1034)	1502 (MxF)	CF			3259291	4.06 103	8.4 213	12 5.5	N/A				3139547	4.06 103	7.35 187	8.4 213	22 10.2	CF			
		1502 (MxM)	CF			N/A				N/A				N/A					CF			
1.5" LS10 1.3 (33)	10,000 (690)	Threaded	P506047	6.53 166	8 3.6	CF				N/A				3139779	7.96 202	9.37 238	7.96 202	26 11.8	CF			
1.5" LS15 1.3 (33)	15,000 (1034)	1502 (MxF)	P510860	10.87 276	26 12	CF				N/A				3139778	5 127	9.4 239	10.1 257	34 15.5	CF			
		1502 (MxM)	CF			N/A				N/A				N/A					CF			
2" LS10 1.88 (48)	10,000 (690)	Threaded	P523525	7.2 183	14 6.2	3139888	6.38 162	9.01 229	21 9.5	3139890	6.36 162	10.73 273	30 13.6	3139904	6.4 163	10.74 273	9 229	37 16.8	3144545	9 229	9 229	29 13.2
2" LS15 1.88 (48)	15,000 (1034)	1502 (MxF)	P514100	11.15 283	37 16.8	3144126	5.5 140	10.91 277	36 16.3	N/A				3139475	5.5 140	10.74 273	10.92 277	56 25.5	3144630	11 279	11 279	48 22
		1502 (MxM)	CF			N/A				N/A				3267203	7.28 185	10.74 273	10.92 277	60 27.2	6101559	11 279	11 279	62 28.1
		1502 (FxF)	CF	9.03 229	20 9.1	N/A				N/A				3144000	5.5 140	10.74 273	8.79 223	42 18.9	P504952	8.79 223	8.79 223	37 16.9
2" LS20 1.88 (48)	20,000 (1379)	2002 (MxF)	CF			CF				N/A				3144569	5.12 130	10.9 277	12.42 315	62 28.3	CF			
		2002 (MxM)	CF			N/A				N/A				N/A					P512325	12.51 318	12.51 318	66 30.2
3" TSi7 2.75 (70)	7,500 (517)	Threaded	CF			N/A				N/A				N/A					CF			
3" TSi15 2.75 (70)	15,000 (1034)	1502 (MxF)	P505417	12.6 320	52 23.8	P505416	7.9 201	14.4 366	68 31	N/A				P505327	7.9 201	16.4 417	14.4 366	107 48.4	P505420	14.5 368	14.5 368	91 41.3
		1502 (MxM)	CF			N/A				N/A				N/A					CF			
3" TSi20 3 (76)	20,000 (1379)	2002 (MxF)	CF			CF				N/A				3145133	9.69 246	21.2 538	20.4 518	299 136	CF			
4" TSi10 3.88 (98)	10,000 (690)	1002 (MxF)	P516092	14.15 359	74 33.6	P517487	8.3 211	16.2 411	99 45	N/A				P516091	8.3 211	18.1 460	16.2 411	161 73.3	CF			
		1002 (MxM)	CF			N/A				N/A				N/A					CF			
4" XHTL 3.5 (89)	10,000 (690)	1502 (MxF)	P517048			N/A				N/A				3130502	9.69 246	21.2 538	20.4 518	275 125	P500656	20.38 518	20.38 518	234 106

Chiksan® Swivel Joint Specifications


TripleStep and Longsweep Swivel Joints

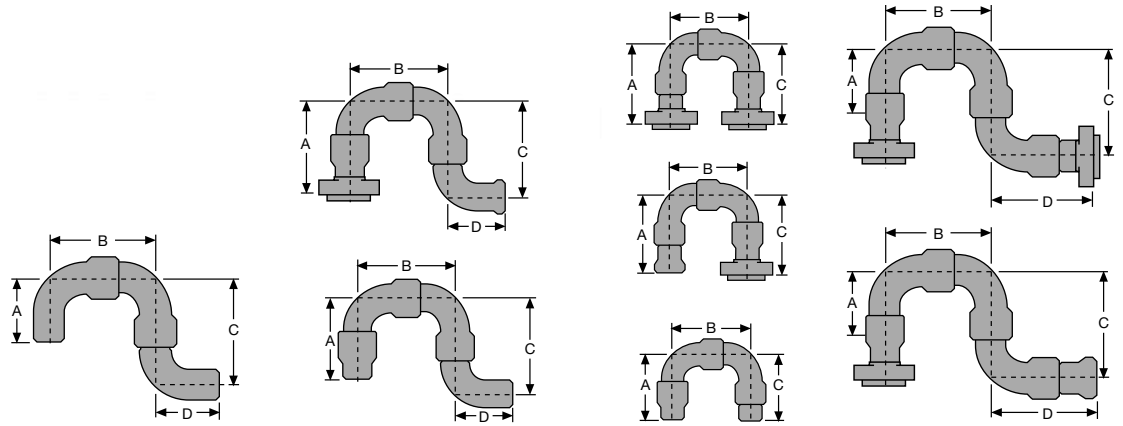

Size/Model Bore in. (mm)	PSI (bar)	End Connections	Style 70					Style 80					Style 10				Style 100								
			Part No.	A	B	C	D	Wt lb kg	Part No.	A	B	C	D	Wt lb kg	Part No.	A	B	C	Wt lb kg	Part No.	A	B	C	D	Wt lb kg
1" LS10 .88 (22)	10,000 (690)	Threaded	N/A						CF						3141454	7.14 181	7.46 189	7.14 181	24 10.9	N/A					
1" LS15 .88 (22)	15,000 (1034)	1502 (MxF)	N/A						P516135	8.4 181	7.47 190	7.47 190	4.06 103	28 12.9	3139550	8.4 213	7.4 188	8.4 213	27 12.1	CF					
		1502 (MxM)	N/A						N/A						3145886	8.4 213	7.4 188	8.4 213	27 12.1	CF					
1.5" LS10 1.3 (33)	10,000 (690)	Threaded	N/A						CF					P501542	7.96 202	9.37 238	7.96 202	26 11.8	N/A						
1.5" LS15 1.3 (33)	15,000 (1034)	1502 (MxF)	N/A						P502504	10.12 257	9.37 238	9.37 238	5 127	47 21.1	3139781	10.12 257	9.37 238	10.12 257	44 20	CF					
		1502 (MxM)	N/A						N/A						3139780	10.12 257	9.37 238	10.12 257	52 23.5	CF					
2" LS10 1.88 (48)	10,000 (690)	Threaded	3139891	6.38 162	10.73 273	10.73 273	6.38 162	47 21.2	3139892	8.91 226	10.73 273	10.73 273	6.38 162	56 25.6	3139476	9 229	10.7 272	9 229	45 20.5	N/A					
2" LS15 1.88 (48)	15,000 (1034)	1502 (MxF)	P505482	5.5 140	10.73 273	10.73 273	5.5 140	60 27.2	3139901	10.9 277	10.73 256	10.73 256	5.5 140	80 36.5	3139905	10.9 277	10.7 272	10.9 277	61 27.7	3144094	10.97 279	10.73 273	10.73 273	10.91 277	82 37.5
		1502 (MxM)	N/A						N/A						3139477	10.9 277	10.7 272	10.9 277	70 31.8	3139903	10.97 279	10.73 273	10.73 273	10.91 277	90 40.7
		1502 (FxF)	N/A						N/A						P518960	8.8 224	10.7 272	10.9 277	50 22.7	CF					
2" LS20 1.88 (48)	20,000 (1379)	2002 (MxF)	N/A						CF					3144570	10.9 277	10.81 275	12.42 315	78 35.2	CF						
		2002 (MxM)	N/A						N/A					3144571	12.51 318	10.91 277	12.52 318	87 39.5	3144572	12.5 318	10.9 277	10.9 277	12.5 318	108 49.1	
3" TSi7 2.75 (70)	7,500 (517)	Threaded	N/A						N/A					P524218	12.88 327	16.42 417	12.88 327	102 46.4	CF						
3" TSi15 2.75 (70)	15,000 (1034)	1502 (MxF)	N/A						P505409	14.4 366	16.4 417	16.4 417	7.9 201	145 65.9	P505325	14.5 368	16.4 417	14.4 366	129 58.7	P505410	14.4 366	16.4 417	16.4 417	14.6 371	168 76.1
		1502 (MxM)	N/A						N/A						P505326	14.4 366	16.4 417	14.4 366	143 64.8	P505411	14.4 366	16.4 417	16.4 417	14.6 371	181 82.2
3" TSi20 3 (76)	20,000 (1379)	2002 (MxF)	N/A						CF					3145134	20.4 518	21.2 538	20.4 518	360 164	CF						
4" TSi10 3.88 (98)	10,000 (690)	1002 (MxF)	N/A						CF					P516094	16.1 409	18.1 460	16.2 411	198 89.8	CF						
		1002 (MxM)	N/A						N/A					P516093	15.9 404	18.1 460	16.2 411	209 95	CF						
4" XHTL 3.5 (89)	10,000 (690)	1502 (MxF)	N/A						CF					3130501	20.4 518	21.2 538	20.4 518	338 154	CF						


Chiksan® Swivel Joint Specifications

Extra High-Pressure Swivel Joints

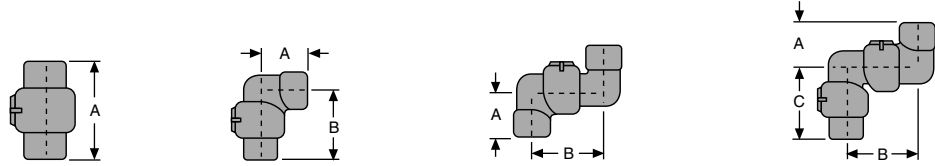

Nom. Sizes in.	CWP psi (bar)	End Connections	Style 20			Style 30				Style 40				Style 50				
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg
2	10,000 (690)	Threaded	3213066	6.97 177	14 6.4	3213067	4.12 105	6.48 165	21 9.5	3213068	4.12 105	6.38 162	28 12.7	3222842	4.12 105	6.45 164	7.52 191	36 16.4


High-Pressure Swivel Joints

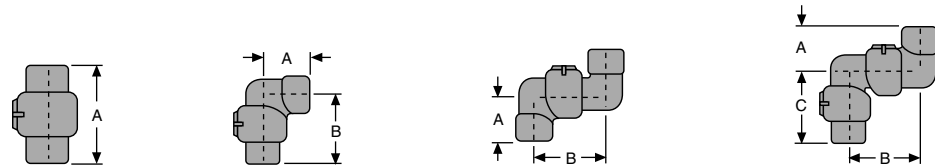

Nom. Size in.	CWP psi (bar)	End Connections	Style 20			Style 30				Style 40				Style 50				
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg
.38	6,000 (414)	Threaded	3111290	3.31 84	1.5 0.7	3111291	1.94 49	2.81 71	1.8 0.8	3111292	1.94 49	2.13 54	2.5 1.1	3111293	1.94 49	2.88 73	2.81 71	3.3 1.5
.5	6,000 (414)	Threaded	3111314	3.31 84	1.5 0.7	3111315	1.94 49	2.81 71	1.8 0.8	3111316	1.94 49	2.13 54	2.5 1.1	3111317	1.94 49	2.88 73	2.81 71	3.3 1.5
.75	6,000 (414)	Threaded	3220946	5.31 135	2.8 1.3	3220947	2.72 69	4.62 117	3.8 1.7	3220948	2.62 67	4.22 107	4.5 2	3220883	2.72 69	4.22 107	4.62 117	6.8 3.1
1	6,000 (414)	Threaded	3207727	5.31 135	2.8 1.3	3207728	2.72 69	4.62 117	3.6 1.6	3207729	2.62 67	4.22 107	4.5 2	3205399	2.72 69	4.22 107	4.62 117	6.8 3.1
1.25	6,000 (414)	Threaded	3207734	5.47 139	4 1.8	3207735	3.19 81	4.72 120	5 2.3	3207736	3.19 81	4.28 109	6.3 2.8	3207737	3.19 81	4.28 109	4.72 120	8 3.6
1.5	6,000 (414)	Threaded	3207741	5.47 139	4 1.8	3207743	3.19 81	4.72 120	5 2.3	3207744	3.19 81	4.28 109	6.3 2.8	3205400	3.19 81	4.28 109	4.72 120	10 4.5
2	6,000 (414)	Threaded	3207749	6.66 169	12 5.5	3207750	4.03 102	5.84 148	15 6.8	3207751	4.03 102	5.88 149	19.5 8.9	3205637	5.84 148	5.88 149	4.03 102	27 12.3
2.5	6,000 (414)	Threaded	CF	8.25 210	18 8.2	3220167	4.88 124	7.12 181	22 10	3221068	4.88 124	7.68 195	29 13.2	3219959	7.12 181	7.68 195	4.88 124	37 16.8
3	6,000 (414)	Threaded	3207756	9.12 232	25 11.4	3207757	4.62 117	9.44 240	37 16.8	3207758	4.62 117	8.75 222	38 17.3	3207759	4.62 117	7.94 202	8.62 219	53 24.1
4	6,000 (414)	Threaded	3207764	9.62 244	38 17.3	3207765	5.56 141	10.81 275	51 23.2	3207766	5.56 141	10.56 268	64 29.1	3207767	5.56 141	9.83 250	9.88 251	86 39.1


Chiksan® Swivel Joint Specifications

Extra High-Pressure Swivel Joints

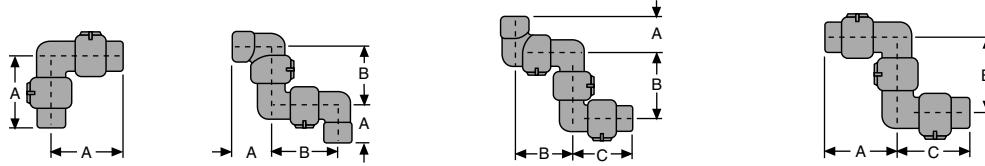

Nom. Sizes in.	CWP psi (bar)	End Connections	Style 60			Style 70				Style 80					Style 10				
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg	Part Number	A	B	C	Wt lb kg
2	10,000 (690)	Threaded	3222843	7.52 191	29 13.2	3256404	4.12 105	7 187	44 20	3256405	4.12 105	7 178	7.52 191	54 24.5	3222841	7 178	7.52 191	7.52 191	45 20.5

High-Pressure Swivel Joints

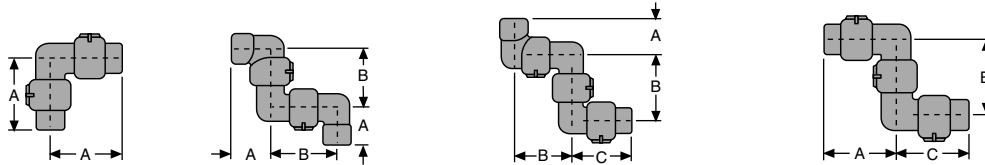


Nom. Size in.	CWP psi (bar)	End Connections	Style 60			Style 70				Style 80					Style 10				
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg	Part Number	A	B	C	Wt lb kg
.38	6,000 (414)	Threaded	3111294	2.81 71	2.8 1.3	CF				N/A					N/A				
.5	6,000 (414)	Threaded	3111318	2.81 71	2.8 1.3	CF				3111320	1.94 49	2.88 73	2.81 71	4.8 2.2	3111313	3.12 79	2.88 73	3.12 79	4 1.8
.75	6,000 (414)	Threaded	3220949	4.62 117	5.8 2.6	CF				3220952	2.72 69	4.22 107	4.62 117	10 4.5	3220951	4.62 117	4.22 107	4.62 117	9 4.1
1	6,000 (414)	Threaded	3207730	4.62 117	8.8 4	3207731	2.72 69	4.22 107	8 3.6	3207732	2.72 69	4.22 107	4.62 117	10 4.5	3207726	4.62 117	4.22 107	4.62 117	9 4.1
1.25	6,000 (414)	Threaded	3207738	4.72 120	7 3.2	3207739	3.19 81	4.28 109	9.4 4.3	3207740	3.19 81	4.28 109	4.72 120	12 5.2	3207733	4.72 120	4.28 109	4.72 120	10 4.5
1.5	6,000 (414)	Threaded	3207745	4.72 120	7 3.2	3207746	3.19 81	4.28 109	9.4 4.3	3207747	3.19 81	4.28 109	4.72 120	14 6.4	3207741	4.72 120	4.28 109	4.72 120	10 4.5
2	6,000 (414)	Threaded	3207752	5.84 148	20 9.1	3207753	4.03 102	5.88 149	31 14.1	3207754	4.03 102	5.88 149	5.84 148	38 17.3	3207748	5.84 148	5.88 149	5.84 148	33 15
2.5	6,000 (414)	Threaded	N/A			N/A				N/A					N/A				
3	6,000 (414)	Threaded	3207760	8.62 219	48 21.8	3207761	4.62 117	7.94 202	57 25.9	3207755	4.62 117	7.94 202	9.44 240	77 35	3207755	8.62 219	7.94 202	9.44 240	71 32.3
4	6,000 (414)	Threaded	3207768	9.88 251	73 33.2	3207769	5.56 141	9.62 244	101 45.9	3207763	5.56 141	9.62 244	10.81 275	123 55.9	3207763	9.88 251	10.31 262	10.81 275	111 50.2

Chiksan® Swivel Joint Specifications


Chiksan Cementing and Circulating Hoses

Nominal Size/Model	Color Code	Cold Working Pressure psi (bar)	Weco Fig. No.	Swivel Joint Styles #1 / #2	Method of Construction Length in Extended Condition, Weight					
					Threaded Part No.	10 ft lb (kg)	Threaded 12 ft Part No.	12 ft lb (kg)	Integral 9.5 ft* Part No.	9.5 ft* lb (kg)
1" HP	Silver	6,000 (414)	602	50 / 50	3211995	37 (17)	3207644	41 (19)	N/A	–
1-1/2" HP	Silver	6,000 (414)	602	50 / 50	3206211	86 (39)	3205870	100 (45)	N/A	–
1-1/2" LS	Black	10,000 (690)	1502	50 / 50	3264538	106 (48)	3254780	–	N/A	–
	Red	15,000 (1034)	1502	50 / 10	N/A	–	N/A	–	3267266	132 (60)
2" HP	Silver	6,000 (414)	602	50 / 50	3206495	114 (52)	3205876	180 (820)	N/A	–
2" XHP	Black	10,000 (690)	1502	50 / 50	CF	CF	3205872	144 (66)	N/A	–
2" LS	Black	10,000 (690)	1502	50 / 50	3144394	136 (62)	3144001	148 (67)	N/A	–
	Red	15,000 (1034)	1502	50 / 10	N/A	–	N/A	–	6102805	159 (72)
2" LSG	Olive Green (Sour Gas)	10,000 (690)	1502	50 / 10	N/A	–	N/A	–	6102809	159 (72)
3" HP	Silver	6,000 (414)	602	50 / 50	3247975	213 (97)	3231262	234 (106)	N/A	–

* Actual length

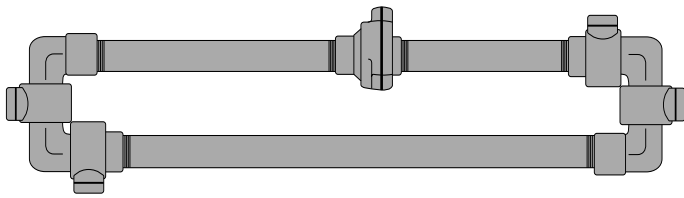


Typical Threaded Construction

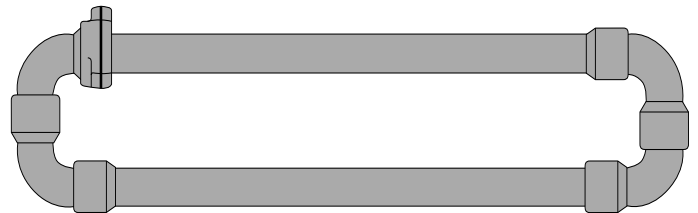

Typical Integral Construction

Chiksan® Swivel Joint Specifications


Low-Pressure Swivel Joints - Ductile Iron

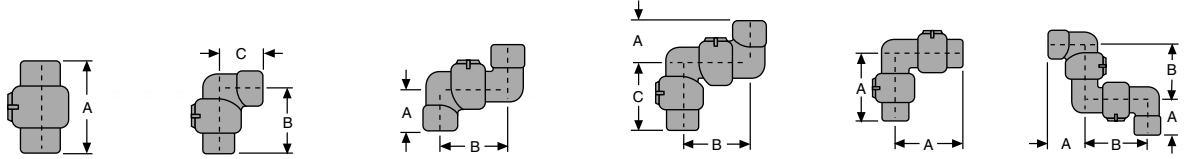

Nom. Size in.	CWP psi (bar)	End Connections	Style 20			Style 30			Style 40			Style 50				Style 60			Style 70						
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg	Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg
.75	600 (41)	Threaded	3131926	4.5 114	2 1	3131927	2.5 64	3.88 99	3 1.2	3131886	2.5 64	3.6 91	3 1.4	3132053	2.5 64	3.6 91	3.9 99	4 2	3131928	3.88 99	4 1.7	3131929	3.64 92	2.4 61	6 2.5
1	600 (41)	Threaded	3131930	4.5 114	2 1	3131931	2.5 64	3.88 99	3 1.3	3131932	2.5 64	3.6 91	3 1.4	3132054	2.5 64	3.6 91	3.9 99	4 2	3131933	3.88 99	4 1.7	3131934	3.63 92	2.5 64	5 2.3
1.25	600 (41)	Threaded	3131935	5 127	3 1.5	3131936	3 76	4.5 114	6 2.5	3131937	3 76	4.2 107	5 2.3	3131937	3 76	4.2 107	4.5 114	7 3.1	3131938	4.5 114	6 2.5	CF			
1.5	600 (41)	Threaded	3131940	5 127	3 1.5	3131941	3 76	4.5 114	5 2.2	3131942	3 76	4.2 107	5 2.3	3132056	3 76	4.2 107	4.5 114	7 3.1	3131943	4.5 114	6 2.5	3131944	4.25 108	3 76	8 3.6
2	600 (41)	Threaded	3131945	5.75 146	8 3.5	3131946	3.5 89	5.75 146	10 4.5	3131947	3.5 89	6.1 155	13 5.9	3132011	3.5 89	6.1 155	5.8 147	17 7.9	3131951	5.75 146	15 6.8	3131952	6.13 156	3.5 89	22 9.8
2.5	600 (41)	Threaded	3131954	6.63 168	17 7.5	3131955	4.63 118	6.88 175	19 8.6	3131957	4.6 117	7.63 194	23 10.5	3131959	4.6 117	7.6 193	6.9 175	28 12.7	3131962	6.88 175	23 10.2	3131963	7.63 194	4.63 118	35 15.9
3	600 (41)	Threaded	3131965	6.63 168	13 5.7	3131966	4.63 118	6.88 175	16 5.7	3131968	4.6 117	7.63 194	16 7.3	3131970	4.6 117	7.6 193	6.9 175	21 9.5	3131973	6.88 175	23 10.2	3131974	7.63 194	4.63 118	8 3.5
	175 (12)	Flanged	3132204	6.63 168	27 12.3	3131976	5.5 140	6.88 175	33 14.8	3131979	5.5 140	7.63 194	39 17.7	CF					CF			CF			
4	600 (41)	Threaded	3131987	7.25 184	18 8	3131988	5 127	7.75 197	24 8	3131990	5 127	9.2 234	31 14.1	3131992	5 127	9.1 231	7.6 193	42 19.1	3131995	7.63 194	35 15.9	3131996	9.13 231.9	5 127	50 22.7
	175 (12)	Flanged	3131356	7.5 191	39 17.7	3131998	6.13 156	8.13 207	47 21.4	3132001	6.13 156	9.5 241	56 25.5	CF					3132006	8 203	58 26.4	CF			

Chiksan® Swivel Joint Specifications


Low-Pressure Swivel Joints - Carbon Steel

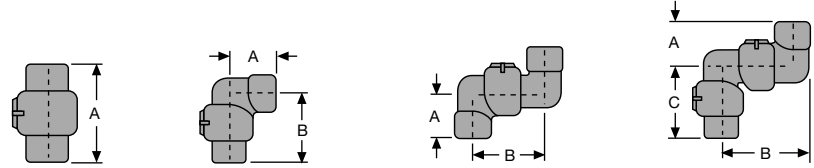

Nom. Size in.	CWP psi (bar)	End Connections	Style 20			Style 30				Style 40				Style 50				
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg
2	1,000 (69)	Threaded	3131048	5.75 146	8 3.4	3131049	3.5 89	5.75 146	10 4.5	3131050	3.5 89	6.1 155	13 5.8	3131052	3.5 89	6.13 156	5.8 147	18 8
	275 (19)	Flanged	CF			3131218	4.25 108	6.29 160	20 8.9	3131220	5.94 151	6.1 155	22 10	CF				
	1,000 (69)	Beveled	3131225	5.75 146	8 3.6	3131226	3.5 89	5.75 146	13 5.8	3131229	3.5 89	6.1 155	13 5.8	3131231	3.5 89	6.13 156	5.75 146	18 8
3	1,000 (69)	Threaded	3131272	6.63 168	12 5.2	3131273	4.62 117	6.88 175	16 7	3131276	4.76 121	7.6 193	21 9.3	3131278	4.6 117	7.6 193	6.9 175	33 15
	275 (19)	Flanged	3131635	6.63 168	29 13.2	3131286	5.5 140	6.88 175	34 15.5	3131289	5.5 140	7.63 194	40 18.2	3131291	5.5 140	7.63 194	6.88 175	46 20.9
	1,000 (69)	Beveled	3131299	6.63 168	12 5.2	3131300	4.63 118	6.88 175	16 7	3131303	4.6 117	7.6 193	21 9.3	3131305	4.63 118	7.63 194	6.88 175	28 12.7
4	1,000 (69)	Threaded	3131316	7.25 184	18 8	3131317	5.00 127	7.75 197	24 10.7	3131320	5 127	9.2 234	31 14.1	3131322	5 127	9.1 231	7.6 193	40 18.2
	275 (19)	Flanged	3134977	7.5 191	43 19.5	3131330	6.13 156	8.13 207	50 22.7	3131333	6.13 156	9.5 241	57 25.9	3131335	6.13 156	9.13 232	8 203	66 30
	1,000 (69)	Beveled	3131343	7.25 184	18 8	3131344	5 127	7.75 197	24 10.7	3131347	5 127	9.2 234	31 14.1	3131349	5 127	9.13 232	7.63 194	40 18.2
6	1,000 (69)	Threaded	3131069	13.94 354	66 30	3131070	9.75 248	16.19 411	76 34.5	3131071	9.75 248	18.48 469	73 33.3	CF				
	275 (19)	Flanged	3131077	13.44 341.4	96 43.6	3131078	9.5 241	15.94 405	112 50.9	3131079	9.5 241	18.5 470	127 57.7	CF				
	1,000 (69)	Beveled	3131088	6.44 164	42 19.2	3131089	2.44 62	6 152	59 27	3131090	6 152	18.5 470	97 44.2	3131091	6 152	18.48 469	12.48 317	123 55.9
8	1,000 (69)	Threaded	3131096	16.25 413	106 48.4	3131097	12.5 318	19.75 502	137 62.4	P523643	12.5 318	23.2 589	167 75.9	CF				
	275 (19)	Flanged	3131104	15.25 387	138 62.9	3131105	12 305	19.25 489	169 77	3131106	12 305	23.2 589	200 91	3131107	12.03 306	23.28 591	19.35 491	261 119
	1,000 (69)	Beveled	3131114	7.25 184	62 28	3131115	8 203	15.25 387	91 41.5	3131116	8 203	23.2 589	121 54.8	CF				

Chiksan® Swivel Joint Specifications

Low-Pressure Swivel Joints - Carbon Steel

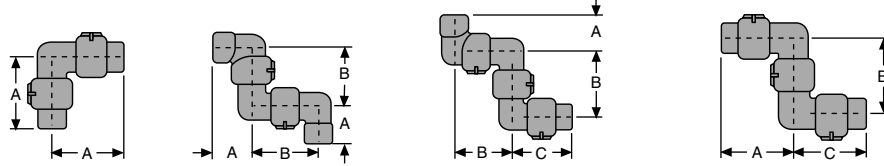

Nom. Size in.	CWP psi (bar)	End Connections	Style 60			Style 70				Style 80				Style 10					
			Part Number	A	Wt lb kg	Part Number	A	B	Wt lb kg	Part Number	A	B	C	Wt lb kg	Part Number	A	B	C	Wt lb kg
2	1000 (69)	Threaded	3131053	5.75 146	15 6.7	3131054	2.4 61	3.64 92	21 9.3	3131055	3.5 89	6.13 156	5.75 146	25 11.5	3131047	5.73 146	6.13 156	6.13 156	22 10.2
	275 (19)	Flanged	3134978	6.2 157	30 13.6	CF				CF					CF				
	1000 (69)	Beveled	CF			CF				CF					P511523	5.73 146	6.07 154	5.73 146	24 10.8
3	1000 (9)	Threaded	3131281	6.88 175	23 10.5	3131282	4.63 118	7.63 194	33 15	3131284	4.63 118	7.63 194	6.88 175	46 20.9	3131271	6.88 175	7.63 194	6.88 175	35 15.9
	275 (19)	Flanged	3131294	6.88 175	40 18.2	CF				CF					CF				
	1000 (69)	Beveled	3131308	6.88 175	24 10.9	P505098	4.63 118	7.63 194	32 14.7	CF					CF				
4	1000 (69)	Threaded	3131325	7.63 194	24 10.7	3131327	5 127	9.13 232	47 21.4	3131328	5 127	9.13 232	7.63 194	58 26.4	3131315	7.63 194	9.13 232	7.63 194	53 24.1
	275 (19)	Flanged	3131338	8 203	59 26.8	CF				CF					CF				
	1000 (69)	Beveled	3131352	7.63 194	24 10.7	3134423	5 127	9.13 232	47 21.4	CF					3265987	7.62 194	9.12 232	7.62 194	53 24.1
6	1000 (69)	Threaded	CF			CF				CF				CF					
	275 (19)	Flanged	3131081	15.94 405	154 70	3131082	6 152	18.6 472	185 84	CF					CF				
	1000 (69)	Beveled	CF			3131093	9.5 241	18.44 468	130 59	3267081	6 152	18.6 472	12.54 319	171 77.7	CF				
8	1000 (69)	Threaded	CF			CF				CF				CF					
	275 (19)	Flanged	3131108	19.41 493	230 104	CF				CF				CF					
	1000 (69)	Beveled	CF			CF				CF				CF					

Weco® Wing Union Specifications

Figure 100 - 1,000 psi (69 bar) cold working pressure

Nominal Pipe Size	in.	2	2 ½	3	4	6	8
Union Part No. Qty/Carion		3200609 16	3200610 10	3200611 6	3200612 4	3200795 1	3200796 1
A Clearance Radius	in. mm	3 ⅜ 81	3 ⅝ 100	4 ½ 114	5 ⅝ 135	6 ⅝ 176	8 ⅞ 209
B Outside Diameter	in. mm	2 ¾ 70	3 ¼ 83	4 102	5 ⅜ 132	7 ⅝ 186	9 ⅝ 241
C End-to-end Threaded	in. mm	3 ⅝ 92	4 ⅞ 109	4 ⅞ 124	5 ¾ 146	6 23/32 171	7 ¾ 183
D Inside Diameter	in. mm	2 ⅝ 55	2 ⅞ 65	3 ⅜ 81	4 ⅜ 106	6 ⅞ 160	8 ¼ 209
Weight	lb kg	6 2.7	10 4.5	14 6.4	22 10	45 20.4	66 30
Material, Sub Material, Nut		DI DI	DI DI	DI DI	DI DI	DI DI	DI DI

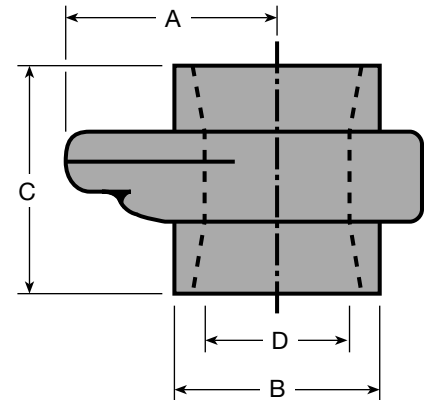


Figure 200 - 2,000 psi (138 bar) cold working pressure

Nominal Pipe Size	in.	1	1 ¼	1 ½	2	2 ½	3	4
Union Part No. Qty/Carion		3200829 40	3200960 28	3200773 28	3200778 16	3200899 10	3200782 6	3200914 4
A Clearance Radius	in. mm	1 31/32 50	2 ¼ 57	2 ½ 64	3 76	3 9/16 90	4 102	4 11/16 119
B Outside Diameter	in. mm	1 19/32 40	2 51	2 ¼ 57	2 29/32 74	3 13/32 84	4 3/32 104	5 ⅛ 130
C End-to-end Threaded	in. mm	2 19/32 66	2 25/32 71	2 25/32 71	3 9/16 90	4 ⅛ 105	4 17/32 115	4 15/16 125
D Inside Diameter	in. mm	1 ⅛ 28	1 15/32 37	1 22/32 43	2 5/32 55	2 9/16 65	3 3/16 81	4 3/16 106
Weight	lb kg	2 0.9	2 0.9	3 1.4	5 2.3	9 4.1	13 5.9	18 8.2
Material, Sub Material, Nut		CS DI	CS DI	CS DI	DI DI	CS DI	SF SF	SF SF

Figure 206 - 2,000 psi (138 bar) cold working pressure

Nominal Pipe Size	in.	1	1 ¼	1 ½	2	2 ½	3	4	6	8	10
Union Part No. Qty/Carion		3207627 40	3207633 28	3207636 28	3207281 16	3207278 10	3203048 6	3205449 4	3202521 1	3202552 1	3202566 1
A Clearance Radius	in. mm	2 51	2 ¼ 57	2 ½ 64	3 76	3 9/16 90	4 102	4 11/16 119	6 ¼ 159	7 7/16 189	9 229
B Outside Diameter	in. mm	1 19/32 40	1 31/32 50	2 ¼ 57	2 13/16 71	3 11/32 85	4 3/32 104	5 ⅛ 130	7 ½ 191	9 9/16 243	11 ½ 292
C End-to-end Threaded	in. mm	2 21/32 67	2 25/32 71	2 25/32 71	3 ¼ 83	4 ⅛ 105	4 17/32 115	5 127	6 21/32 169	7 3/16 183	9 3/32 231
D Inside Diameter	in. mm	1 ⅛ 28	1 15/32 37	1 22/32 43	2 5/32 55	2 9/16 65	3 3/16 81	4 3/16 106	6 9/32 160	8 ¼ 209	10 5/16 262
Weight	lb kg	2 0.9	2 0.9	3 1.4	5 2.3	8 3.6	13 5.9	18 8.2	42 19.1	65 29.5	90 40.8
Material, Sub Material, Nut		CS DI	CS DI	CS DI	SF DI	CS DI	SF SF	SF SF	SF SF	SF SC	SF SC

Materials: AS - Alloy Steel, CS - Carbon Steel, DI - Ductile Iron Casting, SC - Steel Casing, SF - Steel Forging

Weco® Wing Union Specifications

Figure 207 - 2,000 psi (138 bar) cold working pressure

Nominal Pipe Size	in.	3	4	6	8	10
Union Part No. Qty/ Carton		3207906 8	3207907 4	3207908 1	3207981 1	3207982 1
A Clearance Radius	in. mm	5 3/4 146	7 3/16 135	9 15/16 252	12 3/8 314	14 1/2 368
B Outside Diameter	in. mm	4 3/32 104	5 1/8 130	7 1/2 191	9 9/16 243	11 1/2 292
C End-to-end Threaded	in. mm	3 3/4 95	4 5/16 109	5 19/16 148	8 5/8 219	9 11/16 246
D Inside Diameter	in. mm	3 3/16 81	4 3/16 106	6 3/32 160	8 1/4 209	10 5/16 262
Weight	lb kg	10 4.5	16 7.3	37 16.8	70 31.9	96 43.5
Material, Sub Material, Nut		SF SC	SF SF	SF SC	SF SC	SF SC

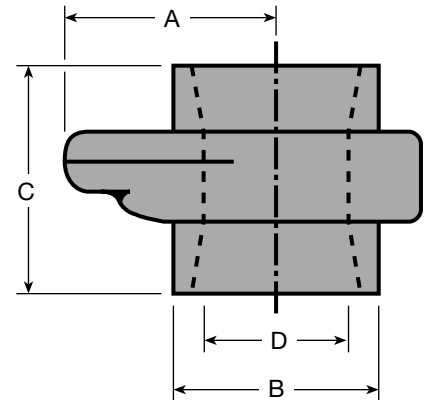


Figure 211 - 2,000 psi (138 bar) cold working pressure

Nominal Pipe Size	in.	1	1 1/2	2	2 1/2	3	4
Union Part No. Qty/ Carton		3205369 40	3205381 32	3205343 16	3205388 10	3205363 6	3205355 4
A Clearance Radius	in. mm	2 1/8 54	2 5/8 67	3 1/8 79	3 11/16 94	4 102	4 5/8 117
B Outside Diameter	in. mm	1 9/16 40	2 7/32 56	2 7/8 73	3 3/8 86	4 3/32 104	5 1/8 130
C End-to-end Threaded	in. mm	2 3/4 70	3 1/32 77	3 15/32 88	4 3/16 106	4 1/2 114	4 7/8 124
D Inside Diameter	in. mm	1 1/8 28	1 11/16 43	2 3/32 55	2 9/16 65	3 3/16 81	4 3/16 106
Weight	lb kg	2 0.9	3 1.4	6 2.7	10 4.5	13 5.9	18 8.2
Material, Sub Material, Nut		CS DI	CS DI	SF DI	CS DI	SF SF	SF SF

Figure 400 - 4,000 psi (276 bar) to 4"; 2,500 psi (172 bar) cold working pressure, 5" to 12"

Nominal Pipe Size	in.	2	2 1/2	3	4	5 1/2 OD*	6	7 OD*	8	10	12
Union Part No. Qty/ Carton		3200291 6	3200290 5	3200292 4	3200337 3	3206347 1	3202179 1	3204333 1	3202060 1	3206747 1	3201578 1
A Clearance Radius	in. mm	3 1/2 89	4 1/32 103	4 3/8 111	5 127	5 13/16 148	6 3/4 171	6 3/4 171	7 13/16 198	9 19/32 244	10 23/32 272
B Outside Diameter	in. mm	3 1/16 78	3 1/2 89	4 3/32 106	5 7/32 133	6 1/4 159	7 3/4 197	7 3/4 197	9 19/32 244	11 3/4 298	14 356
C End-to-end Threaded	in. mm	5 1/4 133	6 1/16 154	6 7/32 158	8 7/32 209	10 19/32 266	11 1/16 281	11 1/16 281	11 7/16 291	10 5/6 270	10 15/16 278
D Inside Diameter	in. mm	2 5/32 55	2 9/16 65	3 3/16 81	4 3/16 106	5 1/8 130	6 9/32 160	6 21/32 169	8 1/4 209	10 5/16 262	12 11/32 313
Weight	lb kg	11 5	16 7.3	19 8.6	28 12.7	47 21.3	64 29	61 27.7	95 43.1	126 57.2	163 73.9
Material, Sub Material, Nut		SF SF	CS SF	SF SF	SF SF	SF SC	CS SC	CS SC	SF SC	SF SC	SC SC

2 inch does not have O-ring
* Casing thread standard

Materials: AS - Alloy Steel, CS - Carbon Steel, DI - Ductile Iron Casting, SC - Steel Casing, SF - Steel Forging

Weco® Wing Union Specifications

Figure 600 - 6,000 psi (414 bar) cold working pressure

Nominal Pipe Size	in.	1	1 ½	2	3	4
Union Part No. Qty/Cartron		3201826 32	3200433 10	3200434 6	3200436 3	3200437 2
A Clearance Radius	in. mm	2 5/16 59	3 9/16 81	3 11/16 94	4 7/16 113	5 5/16 135
B Outside Diameter	in. mm	1 ¾ 44	2 9/16 65	3 76	4 3/16 106	5 ¼ 133
C End-to-end Threaded	in. mm	3 9/16 90	4 7/8 124	6 19/32 163	8 ¾ 222	10 1/16 256
D Inside Diameter	in. mm	1 1/8 28	1 11/16 43	2 5/32 55	3 3/16 81	4 3/16 106
Weight	lb kg	3 1.4	10 4.5	15 6.8	26 11.8	44 20
Material, Sub Material, Nut		CS SF	CS SF	SF SF	SF SF	AS SF

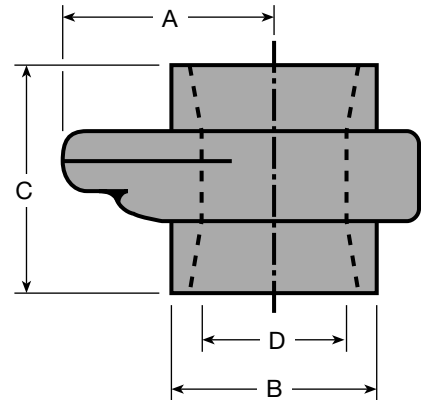


Figure 602 - 6,000 psi (414 bar) cold working pressure

Nominal Pipe Size	in.	1	1 ¼	1 ½	2	3	4
Union Part No. Qty/Cartron		3202377 32	3202434 9	3202428 9	3202382 6	3202416 4	3202399 2
A Clearance Radius	in. mm	2 3/8 60	3 ¼ 83	3 ¼ 83	3 5/8 92	4 ½ 114	5 9/16 132
B Outside Diameter	in. mm	1 ¾ 44	2 9/16 65	2 9/16 65	2 31/32 75	4 5/32 106	5 7/32 133
C End-to-end Threaded	in. mm	3 17/32 90	4 7/8 124	4 7/8 124	5 ¼ 133	6 ¼ 159	8 ¼ 210
E Inside Diameter	in. mm	1 1/8 28	1 13/32 36	1 11/16 43	2 1/16 52	3 3/16 81	4 3/16 106
Weight	lb kg	3 1.4	10 4.5	9 4.1	12 5.4	21 9.5	31 14
Material, Sub Material, Nut		CS SF	CS SF	CS SF	SF SF	SF SF	SF SF

Materials: AS - Alloy Steel, CS - Carbon Steel, DI - Ductile Iron Casting, SC - Steel Casing, SF - Steel Forging

Weco® Wing Union Specifications

Figure 1002 - 10,000 psi (690 bar) to 4"; 7,500 psi (517 bar) cold working pressure, 5"-6"*


Nominal pipe size	in.	1	1 ¼	1 ½	2	2 ½	2 ½ (EUE)	3	4
Union Part No. Qty/Carton		3205681 32	3205675 10	3205665 10	3203132 6	3205626 5	3206927 5	3205565 4	3205533 2
A Clearance radius	in. mm	2 7/32 56	3 1/32 77	3 1/32 77	3 19/16 97	3 7/8 99	4 102	4 17/32 115	4 31/32 126
B Outside diameter	in. mm	1 ¾ 44	2 9/16 65	2 9/16 65	2 31/32 75	3 ½ 89	3 11/16 94	4 ¼ 108	5 5/16 135
C End-to-end threaded	in. mm	3 17/32 90	4 7/8 124	4 7/8 124	5 ¼ 133	6 1/8 156	5 15/16 151	6 7/32 158	8 7/32 209
D Inside diameter	in. mm	1 1/8 28	1 13/32 36	1 11/16 43	2 1/16 52	2 9/16 65	2 13/16 71	3 3/16 81	4 3/16 106
Weight	lb kg	4 1.8	10 4.5	9 4.1	13 5.9	18 8.2	16 7.3	22 10	32 14.5
Material	Sub Nut	AS SF	AS SF	AS SF	SF SF	AS SC	AS SF	AS SF	AS SF

* 5"-6" available with butt weld ends; consult factory for other configurations.

Figure 1003 - 10,000 psi (690 bar) 2"-3"; 7,500 psi (517 bar) cold working pressure, 4"-5"*

Nominal pipe size	in.	2	3	4
Union Part No. Qty/Carton		3208519 6	3219928 2	3219932 1
A Clearance radius	in. mm	3 ¾ 95	4 7/8 124	5 ¾ 146
B Outside diameter	in. mm	3 76	4 3/8 111	5 ½ 140
C End-to-end threaded	in. mm	4 21/32 118	9 1/8 232	10 15/16 278
D Inside diameter	in. mm	2 7/32 55	3 3/16 81	4 102
Weight	lb kg	12 5.4	45 20.4	74 33.6
Material	Sub Nut	AS SF	AS SC	AS SF

* 5" available with butt weld ends; consult factory for other configurations.

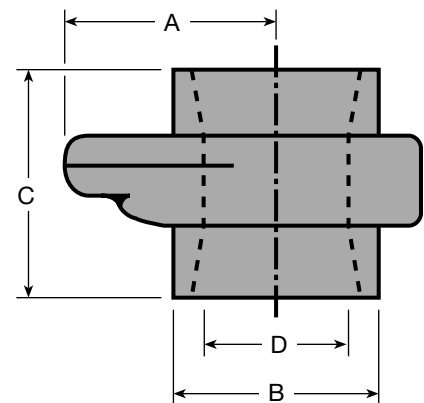


Materials: AS - Alloy Steel, CS - Carbon Steel, DI - Ductile Iron Casting, SC - Steel Casing, SF - Steel Forging

Weco® Wing Union Specifications

Figure 1502 - 15,000 psi (1034 bar) cold working pressure

Nominal Pipe Size	in.	1	1 1/2	2	2 1/2	3	4*
Union Part No. Qty/Carton	in. mm	3254059 18	3254057 10	3201570 5	3203088 4	3207510 3	3252926 1
A Clearance Radius	in. mm	2 7/8 73	3 21/32 93	3 29/32 99	4 5/32 106	4 1/2 114	6 300
B Outside Diameter	in. mm	2 3/16 55	2 31/32 75	3 3/16 81	3 3/4 95	4 13/32 112	5 3/4 146
C End-to-end Threaded	in. mm	4 11/32 110	5 13/32 137	7 178	7 1/4 184	7 5/8 194	8 1/2* 216
D Inside Diameter	in. mm	1 1/8 28	1 11/16 43	2 1/16 52	2 9/16 65	3 3/16 81	—
Weight	lb kg	9 4.1	17 7.7	19 8.6	22 10	30 13.6	64 29
Material, Sub Material, Nut	Sub Nut	AS SF	AS SF	SF SF	AS SC	AS SF	AS SF

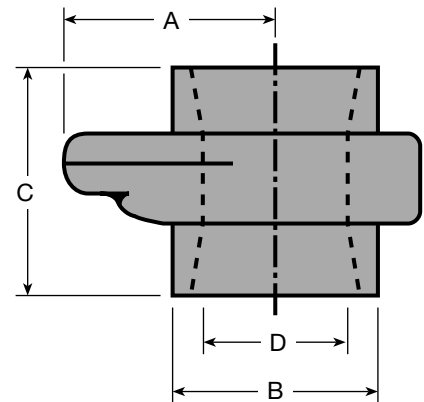

* Non-Pressure Seal

Figure 2002 - 20,000 psi (1380 bar) cold working pressure


Nominal Pipe Size	in.	2	3
Union Part No. Qty/Carton		3222761 5	3245911 1
A Clearance Radius	in. mm	3 3/4 95	6 3/32 155
B Outside Diameter	in. mm	2 19/32 66	5 1/2 140
C End-to-end Butt-weld	in. mm	7 13/32 188	10 1/2 267
D Inside Diameter	in. mm	1 5/16 33	3 76
Weight	lb kg	21 9.5	87 39.5
Material		AS	AS

Figure 2202 - 15,000 psi (1034 bar) cold working pressure

Nominal pipe size	in.	2	3
Union Part No. Qty/Carton		3235746 5	3257994 1
A Clearance radius	in. mm	3 3/4 95	6 3/32 155
B Outside diameter	in. mm	2 7/8 73	5 1/2 140
C End-to-end butt-weld	in. mm	8 13/16 224	10 1/2 267
C Inside diameter	in. mm	1 5/16 33	3 76
Weight	lb kg	22 10	53 24
Material		AS	AS

Tank unions - 500 psi (34 bar) maximum line pressure

Nominal pipe size	in.	6	8	10	12
Union Part No. Qty/Carton		3255061 2	3254864 1	3255064 1	3255067 1
A Clearance radius	in. mm	6 1/4 159	7 1/2 191	8 1/2 213	9 3/4 244
B Outside diameter	in. mm	7 7/8 199	9 7/8 247	11 7/8 297	14 356
C End-to-face	in. mm	4 3/8 111	4 3/8 111	4 1/2 114	4 1/2 114
D	in. mm	3/8 19	3/8 19	3/8 19	3/8 19
E Seal inside diameter	in. mm	6 5/8 168	8 5/8 219	10 3/4 273	12 3/4 324
F BW inside diameter	in. mm	7 3/8 187	9 5/16 237	11 3/8 289	13 1/2 343
Weight	lb kg	22 10	31 14.1	37 16.8	58 21.8
Material		SC	SC	SC	SC

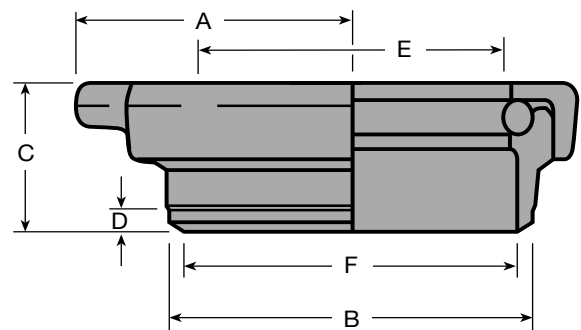


Materials: AS - Alloy Steel, CS - Carbon Steel, DI - Ductile Iron Casting, SC - Steel Casing, SF - Steel Forging

Weco® Wing Union Specifications

Air-o-unions - 150 psi (10 bar) maximum line pressure

Nominal pipe size	in.	4	6	8	10	12	13	16
Union Part No. Qty./Carton		3207504 8	3207130 2	3207894 2	3207149 2	3207897 1	3207900 1	3207903 1
A Tube inside diameter	in. mm	4 ¹⁹ / ₃₂ 117	6 ³ / ₄ 171	8 ³ / ₄ 222	10 ¹⁵ / ₁₆ 278	12 ¹⁵ / ₁₆ 329	13 ⁵ / ₈ 346	16 ¹ / ₄ 413
B Body inside diameter	in. mm	4 ¹⁹ / ₃₂ 117	6 ¹⁵ / ₁₆ 176	8 ¹⁵ / ₁₆ 227	11 ¹ / ₈ 283	13 ¹ / ₈ 333	13 ³ / ₄ 349	16 ³ / ₈ 416
C Butt-weld inside dia.	in. mm	5 ¹ / ₁₆ 129	8 203	10 ¹ / ₈ 257	12 ¹ / ₈ 308	13 ³ / ₈ 340	15 ³ / ₈ 391	17 ³ / ₈ 441
D Butt-weld outside dia.	in. mm	5 ⁹ / ₁₆ 141	8 ⁵ / ₈ 219	10 ³ / ₄ 273	12 ³ / ₄ 324	14 356	16 406	18 457
E	in. mm	6 ⁵ / ₈ 168	10 ¹ / ₄ 260	12 ¹ / ₄ 311	14 ¹ / ₂ 368	16 ¹ / ₂ 419	17 ³ / ₁₆ 437	19 ¹⁹ / ₁₆ 503
F End-to-face	in. mm	3 ¹ / ₈ 79	4 102	4 102	4 ¹ / ₄ 108	4 ¹ / ₄ 108	4 ³ / ₈ 111	4 ¹ / ₄ 108
G	in. mm	1 ¹ / ₂ 38	2 51	2 51	2 51	2 51	2 51	2 51
Misalignment, degrees		6	14	14	14	14	14	14
Weight	lb kg	7 3.2	18 8.2	22 10	26 11.8	30 13.6	42 19.1	45 20.4

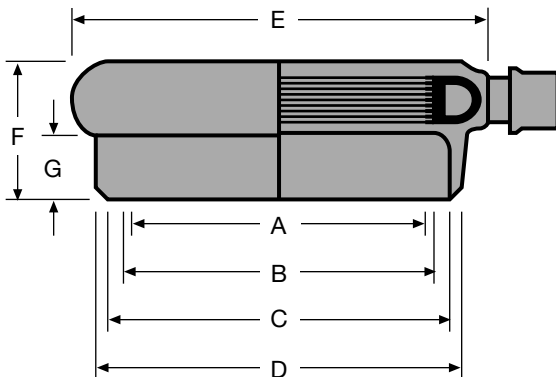






Suction-hose unions - 500 psi (34 bar) maximum line pressure






Size/Type	Part No.	Qty./ Carton	Length		Nut radius		Materials		Weight	
			in.	mm	in.	mm	Nut	Sub	lb	kg
6-inch hose	P512200	1	14 ¹ / ₄	356	5	127	SF	CS	40	18.1
5-inch hose	3251341	1	14 ¹ / ₄	356	5	127	SF	CS	22	10
5-inch socket weld	3202072	4	4 ³ / ₃₂	104	5	127	SF	SF	18	8.2
5-inch line pipe thread	3248972	2	7 ³ / ₄	194	5	127	SF	DI	25	11.3
4-inch line pipe thread	3215198	2	5 ¹⁵ / ₁₆	151	5	127	SF	DI	23	10.4
4-inch hose	3207912	2	14 ¹⁵ / ₃₂	368	5	127	SF	DI	22	10
Blanking cap assy.	3220990	2	3 ¹¹ / ₁₆	92	5	127	SF	CS	22	10

Materials: AS - Alloy Steel, CS - Carbon Steel, DI - Ductile Iron Casting, SC - Steel Casing, SF - Steel Forging






WU6A






Weco® Integral Fitting Specifications

Nom. Size in.	Weco Wing Union Figure No.	CWP psi (bar)	Longsweep Elbow		Elbows						Tees	
												
			Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)
1	1502	15,000 (1034)	-	-	P506048	CF	P506053	CF	P506061	CF	P506069	29 (13.2)
1.5	1502	15,000 (1034)	-	-	P506049	CF	P506054	CF	P506062	CF	P506070	34 (15.4)
2	602	6,000 (414)	3262554	22 (10)	P506050	27 (12.4)	P506055	36 (16.3)	P506063	18 (8.2)	P506071	26.6 (12)
	1502	15,000 (1034)	3260403	27 (12.6)	P503846	32 (14.7)	P506056	41 (18.5)	P506064	24 (10.9)	P503842	29 (13.2)
	2002	20,000 (1380)	CF	CF	P506051	CF	P506057	CF	P506065	CF	P506072	32 (14.5)
3	602	6,000 (414)	3259683	54 (24.5)	3267335	101 (45.6)	P506058	115 (52.2)	P506066	84 (38.1)	P506073	112 (50.8)
	1502	15,000 (1034)	3259845	51 (22.9)	3265950	102 (46.3)	P506059	121 (54.9)	P506067	87 (39.5)	3268575	114 (51.7)
	2002	20,000 (1380)	-	-	P519448	221 (100)	CF	CF	CF	CF	P524672	220 (99.8)
4	602	6,000 (414)	P506172	89 (40.4)	P506052	CF	P506060	CF	P506068	CF	P506075	99 (44.9)
	1002	10,000 (690)	3261102	89 (40.4)	3268033	CF	3268115	CF	3268113	CF	P500631	101 (45.8)
	1502	15,000 (1034)	-	-	CF	CF	CF	CF	CF	CF	P524677	200 (90.7)

Nom. Size in.	Weco Wing Union Figure No.	CWP psi (bar)	Tees									
												
			Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)
1	1502	15,000 (1034)	P506076	32 (14.4)	P506083	32 (14.4)	P506087	35 (15.9)	P506093	35 (15.9)	P506100	38 (17.2)
1.5	1502	15,000 (1034)	P506077	40 (18)	P505457	40 (18)	P506088	47 (21.1)	P506094	47 (21.1)	P506101	52 (23.6)
2	602	6,000 (414)	P506078	31 (14.2)	P506084	31 (14.2)	P506089	36 (16.3)	P506095	36 (16.3)	P506102	41 (18.6)
	1502	15,000 (1034)	P503850	38 (17)	P503840	38 (17)	P503848	46 (20.9)	P505362	46 (20.9)	P505364	54 (24.7)
	2002	20,000 (1380)	P506080	42 (19)	P505584	42 (19)	P506090	52 (23.6)	P506096	52 (23.6)	P506103	62 (28.1)
3	602	6,000 (414)	P506081	124 (56.2)	P506085	124 (56.2)	P506091	136 (61.7)	P506097	136 (61.7)	P506104	148 (67.1)
	1502	15,000 (1034)	3263821	128 (58)	3262298	128 (58)	3265538	142 (64.4)	3265947	142 (64.4)	3268629	156 (70.8)
	2002	20,000 (1380)	P524673	253 (115)	P519451	253 (115)	P524674	285 (129)	P524675	285 (129)	P524676	318 (144)
4	602	6,000 (414)	P506082	114 (51.7)	P506086	114 (51.7)	P506092	127 (57.6)	P506098	127 (57.6)	P506105	141 (64)
	1002	10,000 (690)	P500633	116 (52.6)	3268031	116 (52.6)	P500632	130 (59)	P506099	130 (59)	P506106	143 (64.9)
	1502	15,000 (1034)	P524678	234 (106)	P518790	234 (106)	P524680	268 (122)	P524681	268 (122)	P524682	302 (137)

Weco® Integral Fitting Specifications

Nom. Size in.	Weco Wing Union Figure No.	CWP psi (bar)	Longsweep Elbow		Crosses							
												
			M x M		F x F x F x F		F x F x M x F		F x F x M x M		F x M x M x F	
Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	
1	1502	15,000 (1034)	-	-	P516107	CF	P506113	CF	P506118	CF	P506129	CF
1.5	1502	15,000 (1034)	-	-	P503531	70 (31.8)	3269120	77 (35)	P506119	83 (37.6)	P506130	83 (37.6)
2	602	6,000 (414)	P506171	27 (12.2)	P506108	58 (26.3)	P506114	62 (28.1)	3262655	67 (30.4)	P506131	67 (30.4)
	1502	15,000 (1034)	3261768	34 (15.4)	3257972	59 (26.8)	3257973	66 (30)	3258450	73 (33.1)	3258451	73 (33.1)
	2002	20,000 (1380)	CF	CF	3267282	CF	P506115	CF	P506120	CF	P506132	CF
3	602	6,000 (414)	P506174	66 (30)	P506109	157 (71.2)	P506116	168 (76.2)	P506121	180 (81.6)	P506133	180 (81.6)
	1502	15,000 (1034)	P506175	65 (29.5)	P506110	136 (61.7)	P517401	178 (80.7)	P506122	183 (83)	P506134	183 (83)
	2002	20,000 (1380)	-	-	-	-	-	-	-	-	-	-
4	602	6,000 (414)	P506176	102 (46.3)	P506111	144 (65.3)	P504791	157 (71.2)	P506123	170 (77.1)	P506135	170 (77.1)
	1002	10,000 (690)	P506177	102 (46.3)	P506112	144 (65.3)	P506117	157 (71.2)	P506124	170 (77.1)	P506136	170 (77.1)
	1502	15,000 (1034)	-	-	-	-	-	-	-	-	-	-

Nom. Size in.	Weco Wing Union Figure No.	CWP psi (bar)	Crosses				Laterals				Wyes	
												
			F x M x M x M		M x M x M x M		M x F x F		F x F x F		M x F x F	
Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	Part No.	Wt. lb (kg)	
1	1502	15,000 (1034)	P506137	CF	P506146	CF	P506154	58 (26.3)	P506160	56 (25.4)	P506164	CF
1.5	1502	15,000 (1034)	P506138	89 (40.4)	P506147	94 (42.6)	P505434	62 (27.9)	-	-	P506166	44 (20)
2	602	6,000 (414)	P506139	72 (32.7)	P506148	77 (35)	3263029	48 (21.5)	-	-	3262652	28 (12.7)
	1502	15,000 (1034)	3257976	80 (36.3)	3257975	87 (39.5)	3261420	54 (24.5)	-	-	3208846	27 (12.2)
	2002	20,000 (1380)	P506140	CF	P506149	CF	P506156	CF	-	-	3254106	28 (12.7)
3	602	6,000 (414)	P506141	192 (87.1)	P506150	203 (92.1)	CF	CF	CF	CF	-	-
	1502	15,000 (1034)	P506142	197 (89.4)	P506151	211 (95.7)	3266805	88 (40.1)	P506161	90 (40.9)	-	-
	2002	20,000 (1380)	-	-	-	-	CF	CF	CF	CF	-	-
4	602	6,000 (414)	P506144	183 (83)	P506152	197 (89.4)	P506158	117 (53.1)	CF	CF	-	-
	1002	10,000 (690)	P506145	183 (83)	P506153	197 (89.4)	P519459	174 (78.9)	CF	CF	-	-
	1502	15,000 (1034)	-	-	-	-	P518757	310 (141)	CF	CF	-	-

Weco® Integral Fitting Specifications

Dimensional Data


Nominal Size in.	Longsweep Elbow				Block Elbow A in. (mm)
	M x M		M x F		
	A in. (mm)	B in. (mm)	A in. (mm)	B in. (mm)	
1	N/A	N/A	N/A	N/A	6.06 (154)
1.5	N/A	N/A	N/A	N/A	6.06 (154)
2	7.16 (182)	5.13 (130)	7.16 (182)	5.5 (140)	6.06 (154)
3	10 (254)	7.59 (193)	10 (254)	7.94 (202)	8 (203)
4	12.62 (321)	9.69 (246)	12.62 (321)	9.69 (246)	8.2 (208)

Nominal Size in.	Wyes		Tee		Cross	
	A in. (mm)	B in. (mm)	A in. (mm)	B in. (mm)	A in. (mm)	B in. (mm)
1	5.25 (133)	5 (127)	6.06 (154)	12.12 (308)	7.50 (191)	15 (381)
1.5	5.25 (133)	5 (127)	6.06 (154)	12.12 (308)	7.50 (191)	15 (381)
2	5.25 (133)	5 (127)	6.06 (154)	12.12 (308)	7.50 (191)	15 (381)
3	N/A	N/A	8 (203)	16 (406)	8 (203)	16 (406)
4	N/A	N/A	8.20 (208)	16.40 (417)	8.20 (208)	16.40 (417)



Nominal Size in.	Weco Wing Union End	45° Lateral			60° Lateral		
		A in. (mm)	B in. (mm)	C in. (mm)	A in. (mm)	B in. (mm)	C in. (mm)
1	—	10.50 (267)	15.75 (400)	5.25 (133)	N/A	N/A	N/A
1.5	—	10.50 (267)	15.75 (400)	5.25 (133)	N/A	N/A	N/A
2	—	10.50 (267)	15.75 (400)	5.25 (133)	N/A	N/A	N/A
3	602	N/A	N/A	N/A	8.5 (216)	16 (406)	6.63 (168)
3	1502	N/A	N/A	N/A	8.5 (216)	16 (406)	6.63 (168)
3	2002	15 (381)	20.26 (515)	7.63 (194)	N/A	N/A	N/A
4	602	N/A	N/A	N/A	11.50 (292)	19.50 (495)	8 (203)
4	1002	N/A	N/A	N/A	11.50 (292)	19.50 (495)	8 (203)
4	1502	15 (381)	20.26 (515)	7.63 (194)	N/A	N/A	N/A

Weco® Integral Fitting Specifications


Dimensional Data




Longsweep Elbows

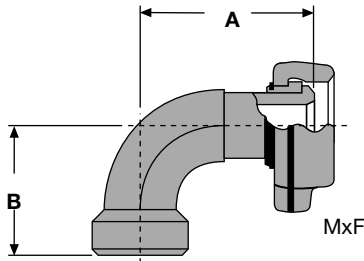


Cushion Block Elbow

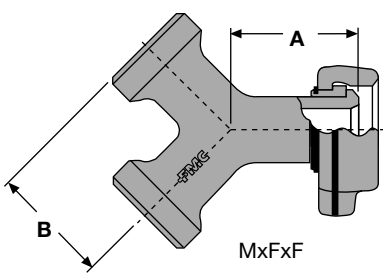


Wye

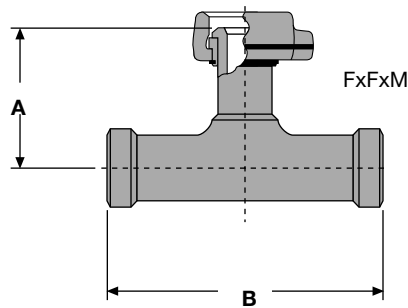


Tee

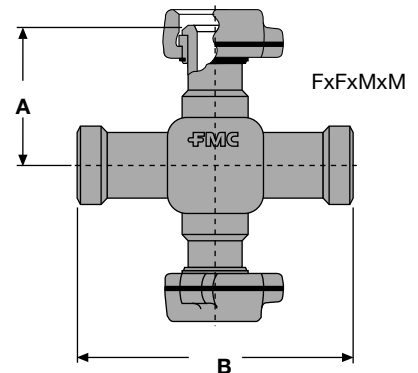

Cross

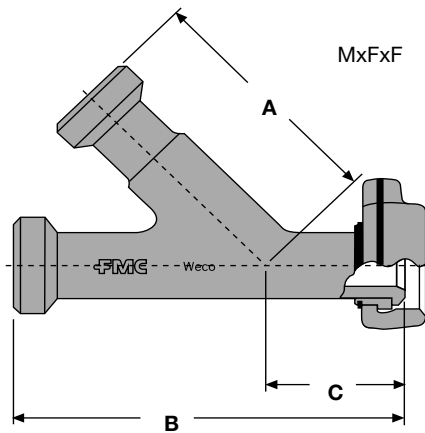

45° Lateral

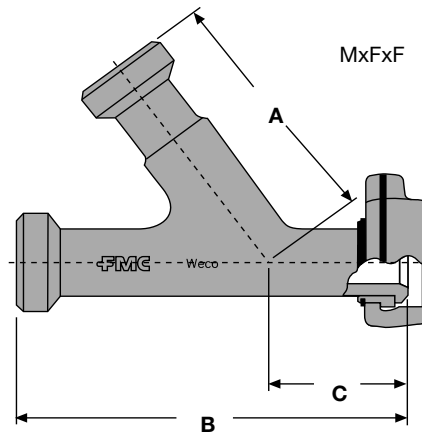

60° Lateral

Weco® Pup Joint Specifications

Integral

Sizes	Weco Union End	CWP psi (bar)	2 ft (610 mm)		3 ft (914 mm)		4 ft (1,219 mm)		5 ft (1,524 mm)		6 ft (1,829 mm)		8 ft (2,438 mm)		10 ft (3,048 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
1"	1502	15,000 (1034)	3263200	18 (8.2)	P512501	25 (11.3)	3262915	31 (14.1)	3261090	37 (16.8)	3262229	43 (19.5)	3266745	55 (25)	3261496	67 (30.4)

Integral with Retention Shoulder

Sizes	Weco Union End	CWP psi (bar)	3 ft (914 mm)		4 ft (1,219 mm)		5 ft (1,524 mm)		6 ft (1,829 mm)		8 ft (2,438 mm)		10 ft (3,048 mm)		12 ft (3,658 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
2"	1502	15,000 (1034)	P516825	41 (18.6)	P516823	50 (22.7)	P516821	58 (26.3)	P516820	67 (30.4)	P516810	84 (38.1)	P516485	101 (45.8)	P516817	118 (53.5)
3"	1502	15,000 (1034)	P517538	73 (33.1)	P517582	91 (41.3)	P517664	108 (49)	P517672	125 (56.7)	P517674	160 (72.6)	P517111	195 (88.5)	N/A	
3"	2002	20,000 (1380)	P502323	151 (68.5)	P502324	205 (93)	P519440	257 (117)	P502326	313 (142)	P519441	365 (166)	N/A		P502327	583 (264)
4"	1502	15,000 (1034)	CF		CF		P518458	247 (112)	CF		P518450	371 (168)	P518437	453 (206)	N/A	

NPS Detachable Nut with Retention Shoulder

Sizes	Weco Union End	CWP psi (bar)	2 ft (610 mm)		3 ft (914 mm)		4 ft (1,219 mm)		5 ft (1,524 mm)		6 ft (1,829 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
2"	1502	15,000 (1034)	P508589	32 (14.5)	P508590	39 (17.7)	P508591	46 (20.9)	P508592	53 (24)	P508593	60 (27.2)
3"	1502	15,000 (1034)	P508600	56 (25.4)	P508601	70 (31.8)	P508602	84 (38.1)	P508603	99 (44.9)	P508604	113 (51.3)
4"	602	6,000 (414)	CF		CF		P510406	101 (45.8)	P510407	118 (53.5)	P510408	134 (60.8)
4"	1002	10,000 (690)	P512866	79 (35.8)	N/A		P510400	122 (55.3)	P510401	143 (64.9)	P510402	165 (74.8)
4"	1502	15,000 (1034)	CF		CF		P520520	36 (83.9)	CF		CF	

Sizes	Weco Union End	CWP psi (bar)	8 ft (2,438 mm)		10 ft (3,048 mm)		12 ft (3,658 mm)		20 ft (6,096 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
2"	1502	15,000 (1034)	P508594	73 (33.1)	P508595	87 (39.5)	P508596	101 (45.8)	P508598	156 (70.8)
3"	1502	15,000 (1034)	P508605	142 (64.4)	P508606	170 (77.1)	P508607	199 (90.3)	P508609	313 (142)
4"	602	6,000 (414)	P510409	167 (75.8)	P510410	200 (90.7)	P510411	233 (106)	CF	
4"	1002	10,000 (690)	P510403	207 (93.9)	P510404	250 (113)	P510405	293 (133)	P512105	464 (211)
4"	1502	15,000 (1034)	CF		P513472	365 (166)	N/A		P520526	665 (302)

Weco® Pup Joint Specifications

NPS Non-Detachable Nut

Sizes	Weco Union End	CWP psi (bar)	2 ft (610 mm)		3 ft (914 mm)		4 ft (1,219 mm)		5 ft (1,524 mm)		6 ft (1,829 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
1"	1502	15,000 (1034)	P515014	15 (6.8)	3265578	18 (8.2)	3265579	21 (9.5)	3265580	24 (10.9)	3262631	27 (12.2)
1.5"	1502	15,000 (1034)	3256224	29 (13.2)	3265598	35 (15.9)	3254968	42 (19.1)	3265599	24 (10.9)	3265600	55 (24.9)
2"	602	6,000 (414)	CF		CF		CF		CF		3265733	45 (20.4)
2"	1502	15,000 (1034)	3255329	31 (14.1)	3255328	38 (17.2)	3255522	45 (20.4)	3255327	52 (23.6)	3255524	59 (26.8)
3"	602	6,000 (414)	3268620	49 (22.2)	3267340	63 (28.6)	3267722	78 (35.4)	3267339	92 (41.7)	P501345	106 (48.1)
3"	1502	15,000 (1034)	3255323	55 (24.9)	3255322	69 (31.3)	CF		3255321	98 (44.5)	3255379	112 (50.8)
4"	602	6,000 (414)	P507216	62 (28.1)	P507040	78 (35.4)	3251806	95 (43.1)	CF		3251807	128 (58.1)
4"	1002	10,000 (690)	3265769	69 (31.3)	P506629	91 (41.3)	3265771	112 (50.8)	3265772	133 (60.3)	3265773	155 (70.3)

Sizes	Weco Union End	CWP psi (bar)	8 ft (2,438 mm)		10 ft (3,048 mm)		12 ft (3,658 mm)		20 ft (6,096 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
1"	1502	15,000 (1034)	3256612	33 (15)	3265583	21 (9.5)	P504985	45 (20.4)	CF	45 (20.4)
1.5"	1502	15,000 (1034)	3254969	68 (30.8)	3256062	81 (36.7)	CF		CF	
2"	602	6,000 (414)	N/A		N/A		3265739	80 (36.3)	CF	80 (36.3)
2"	1502	15,000 (1034)	3255326	73 (33.1)	3255325	86 (39)	3255324	100 (45.4)	3265728	100 (45.4)
3"	602	6,000 (414)	P504506	135 (61.2)	3267338	163 (73.9)	P501344	192 (87.1)	CF	192 (87.1)
3"	1502	15,000 (1034)	3255320	141 (64)	3255423	169 (76.7)	3255381	198 (89.8)	3255427	198 (89.8)
4"	602	6,000 (414)	P514350	161 (73)	3251808	194 (88)	N/A		CF	
4"	1002	10,000 (690)	3265775	198 (89.8)	3265777	240 (109)	CF		CF	

NPS Detachable Nut*

Sizes	Weco Union End	CWP psi (bar)	2 ft (610 mm)		3 ft (914 mm)		4 ft (1,219 mm)		5 ft (1,524 mm)		6 ft (1,829 mm)		8 ft (2,438 mm)		10 ft (3,048 mm)		12 ft (3,658 mm)	
			Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)	Part No.	lb (kg)
2"	1502	15,000 (1034)	3265907	31 (14.1)	P513374	38 (17.2)	3265908	45 (20.4)	3265909	52 (23.6)	P511842	59 (26.8)	P512102	73 (33.1)	3265906	86 (39)	P504985	45 (20.4)
3"	1502	15,000 (1034)	3267024	56 (25.4)	CF		3267025	84 (38.1)	3267026	99 (44.9)	P513301	113 (51.3)	CF		3267053	170 (77.1)	CF	
4"	602	6,000 (414)	CF		CF		CF		P514712	112 (50.8)	P514711	128 (58.1)	P514713	161 (73)	P514715	194 (88)	3265739	80 (36.3)

*20 ft (6,096 mm) size: consult factory

Typical Weco® and Chiksan® Equipment Recommended Temperature Ranges

(Consult factory for specific values)

Elastomer Selection	Product Line and Materials of Construction					Temperature Ranges
	Wing Unions, Swivel Joints		Wing Unions, Swivel Joints, Plug Valves, Check Valves, Fittings, Pup Joints, Adapters		Butterfly Valves	
	Ductile Iron	Carbon Steel	Alloy Steel Standard Service	Alloy Steel Sour Gas Service		
No Seal (Wing Union)	X					20°F (-7°C) to 300°F (149°C)
No Seal (Wing Union)		X				0°F (-18°C) to 300°F (149°C)
Nitrile	X					20°F (-7°C) to 240°F (116°C)
Nitrile		X				0°F (-18°C) to 240°F (116°C)
Nitrile			X			-20°F (-29°C) to 240°F (116°C)
Winterized Nitrile				X		-50°F (-46°C) to 240°F (116°C)
HNBR	X					20°F (-7°C) to 300°F (149°C)
HNBR		X	X	X		10°F (-12°C) to 300°F (149°C)
Viton®	X	X	X	X		20°F (-7°C) to 300°F (149°C)
Natural Rubber Seat					X	-20°F (-29°C) to 150°F(66°C)
Nitrile Seat					X	-20°F (-29°C) to 200°F (93°C)
EPDM, Hypalon, or PTFE Seat					X	-20°F (-29°C) to 250°F (121°C)
Silicone Rubber Seat					X	-20°F (-29°C) to 300°F (149°C)
Fluoroelastomer Seat					X	-10°F (-23°C) to 300°F (149°C)
Neoprene Seat					X	0°F (-18°C) to 200°F (93°C)

Warnings and Cautions

FMC Technologies cannot anticipate all of the situations a user may encounter while installing and using FMC products. Therefore, the user of FMC products MUST know and follow all applicable industry specifications and practices on the safe installation and use of these products. For additional safety information, refer to FMC Technologies product catalogs, product brochures, and installation, operating, and maintenance manuals, which can be accessed at www.fmctechnologies/fluidcontrol.com, or contact FMC Technologies at 800-772-8582.

WARNING

Failure to follow these safety warnings could result in death, serious personal injury, and/or severe property damage.

- Never mix or assemble components, parts, or end connections with different pressure ratings. Mismatched conditions, including but not limited to that of a 2" Figure 1502 male sub end connected to a 2" Figure 602 female sub, may fail under pressure resulting in death, serious personal injury, or severe property damage.
- Never use or substitute non FMC components or parts in FMC products or assemblies.
- Never modify or repair FMC products in a manner not specifically directed in instructions published by FMC Technologies.
- Never strike, tighten, loosen, or attempt repairs on pressurized components or connections.
- Never exceed the rated working pressure of the product.
- Complete and proper make-up of components and connections is required to attain rated working pressure. Always apply essential care, attention, handling, and inspection to threaded components before, during and after make-up.
- Never use severely worn, eroded, or corroded products. Contact FMC Technologies for more information on how to identify the limits of erosion and corrosion.
- Never strike wing union nuts having severely flattened and extruded ears. This condition can result in flying debris leading to serious personal injury and must immediately be addressed by either grinding off extruded material or removing the nut from service.
- Always follow safe practices when using products in overhead applications. Products not properly secured could fall.
 - Never exceed the load rating of lifting devices on products or lifting equipment.
 - Use of FMC products in suspension applications can result in over-stress conditions leading to catastrophic failure.
 - If externally applied loads are anticipated, consult factory.
- Always follow safe practices when manually lifting and carrying products.
- Always select only appropriate product and materials for the intended service:
 - Never expose standard service products to sour gas fluids (Refer to NACE MR-01-75). Do not interchange sour gas with standard service components.
 - Always use appropriate safety precautions when working with ferrous products in below freezing temperatures. Freezing temperatures lower the impact strength of ferrous materials.
- Always follow manufacturer's instructions and Material Safety Data Sheet directions when using solvents.
- Always make certain that personnel and facilities are protected from residual hazardous fluids before disassembly of any product.
- Whenever leakage is detected from FMC Technologies products, remove them from service immediately to prevent death, serious personal injury, and/or property damage.

SAFETY INSTRUCTIONS: The applications of FMC products are in working environments and systems which must be properly designed and controlled. Safety procedures and policies MUST be clearly established by the user and followed. Always use appropriate protective equipment.

FMC Technologies, Inc.

1803 Gears Road
Houston, Texas 77067
Tel +1-281-260-2121
Fax +1-281-260-2122

FMC Technologies, Inc.

2825 West Washington
Stephenville, Texas 76401
Toll Free 1-800-772-8582 (U.S.)
Tel +1-254-968-2181
Fax +1-254-968-5709

www.fmctechnologies.com/fluidcontrol

FMC Technologies